



2020 COMMERCIAL CATALOG & PRICE BOOK

EFFECTIVE 8.1.2020



HOW TO USE THIS CATALOG.

Look for these icons throughout the catalog to easily identify key features of our commercial products.



= Proximity® Sensing Technology



= H₂Optics[®] Sensing Technology



= DIAMOND™ Valve



= H₂Okinetic® Technology



= MagnaTite® Docking



= WaterSense® Labeled Product (Faucets and Shower Heads)



= WaterSense® Labeled Product (Flush Valves)



= Water-Efficient Product Kitchen Faucets: flow rate of 1.5 or 1.8 gpm versus Industry Standard ASME A112.18.1/ CSA B125.1 of 2.2 gpm.

Lavatory Faucets: flow rate of 1.2 gpm or lower versus Industry Standard ASME A112.18.1/CSA B125.1 of 2.2 gpm.

Flush Valves: water closet flush valves of 1.1 or 1.27 gpf and urinal flush valves of .5 gpf versus Industry Standard ASME 112.2.

Shower Heads and Hand Showers: flow rate of 1.5, 1.75 or 2.0 gpm versus Industry Standard ASME A112.18.1/CSA B125.1 of 2.5 gpm.



= ADA-Compliant Product

Delta® faucets are compliant with all federal and state drinking water legislation.

WaterSense® and the WaterSense logo are registered trademarks of the U.S. Environmental Protection Agency. LEED® is a registered trademark of the U.S. Green Building Council. Agion® is a registered trademark of Sciessent, LLC. Celcon® is a registered trademark of CNA Holdings, LLC.

Tygon® liner is a registered trademark of Saint-Gobain Performance Plastics.

LAVATORY FAUCETS Electronic Lavatory Faucets with Proximity Sensing Technology
FLUSH VALVES Electronic
HEALTHCARE Surgeon Scrub Up
UNIVERSAL DESIGN Décor Assist™
SHOWERING SOLUTIONS MultiChoice® Universal
BATH ACCESSORIES/DRAINAGE 50
PRICE BOOK
WARRANTYC164
WEBC165

TECHNOLOGICAL INNOVATIONS 4

TECHNOLOGIES THAT MAKE A DIFFERENCE.

H2OPTICS® SENSING TECHNOLOGY

Delta® electronic faucets and flush valves with $H_2Optics$ Sensing Technology operate consistently, overcoming such factors as dark clothing or lighting conditions. They're also water efficient,* contributing to LEED® certification.

BATTERY BACKUP FOR HARDWIRE-OPERATED ELECTRONICS

Battery backup lets hardwire units keep working through power outages, by temporarily switching to a 9-Volt battery. Available to order for most Delta hardwire-operated electronic models.



SOLAR LAVATORY FAUCETS

Drawing power from natural and artificial light sources, our energy-efficient solar lavatory faucets incorporate a 0.5 gpm spray outlet to add water savings. Convenient hands-free infrared sensing promotes hygiene, while above-deck components ease installation and maintenance. Batteries add extra dependability.



PROXIMITY® SENSING TECHNOLOGY

Proximity Sensing Technology—the next generation in hands-free functionality—makes Delta electronic faucets the most responsive in the industry. The entire faucet body acts as a sensor, activating water flow when approached and stopping once hands are removed. And the lack of an exposed sensor reduces the risk of sensor damage from vandalism or cleaning products.



DIAMOND VALVE

By reducing buildup of calcium and mineral deposits, our durable DIAMOND Valve eliminates wear on seals, reducing leaks and helping faucets last longer.





IN2ITION® TWO-IN-ONE SHOWER

Our In2ition Two-in-One Shower offers two streams of water at once, so users can put water where they need it most—using the integrated shower heads together or separately. In its primary position, the In2ition Shower functions as a regular shower head, while the hand shower offers the flexibility for closer-range tasks.



H2OKINETIC® TECHNOLOGY

H₂Okinetic Technology sculpts water into a unique, oscillating wave pattern that delivers more warmth, more intensity, and 3X the coverage* of a standard shower. Users get the feeling of more water, without using more water—helping you save on utility costs, and contributing points toward LEED® certification.


*Coverage measured in accordance with EPA WaterSense® Specification for Shower Heads, March 4, 2010.



MULTICHOICE® UNIVERSAL VALVE

Installing the Delta® MultiChoice Universal Valve makes it easier to upgrade style and functionality later, without changing plumbing behind the wall. Multiple connection options and a high-flow rough for shower-only configurations add even more flexibility, while a refined temperature limit stop allows more precise settings.



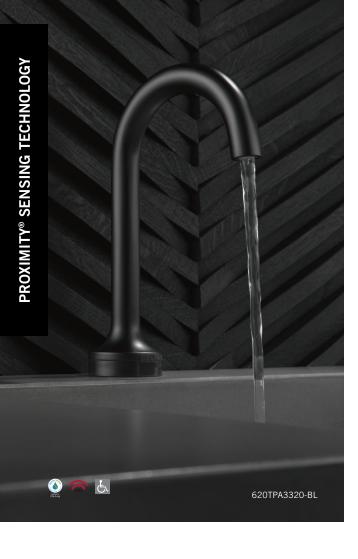



Single-Hole Single-Inlet Gooseneck Faucet with Proximity Sensing Technology 620TPA3320







- 24 VAC to 6 VDC Hardwire operation
- Cast brass body
- 1.5 gpm vandal-resistant laminar outlet Surface-mounted control box
- Field adjustment of electrical sensitivity
- Models also available with additional outlets, 10" recessed
- boxes and Brilliance® Stainless and Matte Black finishes
- Optional 4" cast coverplate
- AC filter required—order separately ■ Transformer required—order separately
- Available as battery-operated model



Single-Hole Single-Inlet Faucet with Proximity Sensing Technology 630TPA320







- 24 VAC to 6 VDC
- Hardwire operation
- Cast brass body
- 1.5 gpm vandal-resistant laminar outlet
- Surface-mounted control box
- Field adjustment of electrical sensitivity
- Easy-to-program controller provides metering mode and line rinse
- Optional 4" cast coverplate
- AC filter required—order separately
- Transformer required—order separately
- Available as battery-operated model



Single-Hole Single-Inlet High-Rise Faucet with Proximity Sensing Technology 590TPA0120





- 24 VAC to 6 VDC
- Hardwire operation Cast brass body
- 1.5 gpm vandal-resistant laminar with Agion® antimicrobial outlet
- Surface-mounted control box
- Field adjustment of electrical sensitivity
- Optional 8" and 4" coverplates, 10" recessed boxes, and additional outlets
- AC filter required—order separately ■ Transformer required—order separately
- Available as battery-operated model



3-Hole Single-Inlet 4" Centerset Faucet with Proximity Sensing Technology 591TPA0250





- 24 VAC to 6 VDC
- Hardwire operation
- Cast brass body
- 0.5 gpm vandal-resistant
- laminar outlet ■ Surface-mounted control box
- Field adjustment of
- electrical sensitivity
- Models also available with additional outlets and 10" recessed boxes
- AC filter required—order separately
- Transformer required—order separately Available as battery-operated model



Single-Hole Single-Inlet Faucet with Proximity Sensing Technology 590-PALGHDF-HW







- 24 VAC to 6 VDC
- Hardwire operation ■ Metal construction
- 0.5 gpm vandal-resistant laminar outlet
- Surface-mounted control box
- Field adjustment of electrical sensitivity
- Models also available with 4" and 8" coverplates
- AC filter required—order separately
- Transformer required—order separately
- Available as battery-operated model





Single-Hole Solar Lavatory Faucet DEMD-320LF



- Solar-powered with battery assist
- Above-deck electronics and battery pack (4 AA)
- Standard infrared sensing with 6"-8" range
- Batteries required and included
- 0.5 gpm vandal-resistant spray outlet



Single-Hole Solar Lavatory Faucet with Side Mixer DEMD-321LF





- Solar-powered with battery assist
- Above-deck electronics and battery pack (4 AA)
- Non-removable side mixer to adjust water temperature
- Standard infrared sensing with 6"-8" range
 0.5 gpm vandal-resistant spray outlet
- Batteries required and included

SOLAR ELECTRONIC LAVATORY FAUCETS

DEMD-320LF





Single-Hole Faucet with ASSE 1070 Thermostatic Mixing Valve DEMD-611LF





- Battery operation
- Above-deck solenoid and below-deck battery
- Integrated above-deck thermostatic mixing valve
- 0.66 gpm with vandal-resistant wrench flat spray outlet
- .17 gallon/cycle based on 15 second
- maximum run time

 Temperature adjustment handle
- Standard infrared sensing
- Optional 4" coverplate ■ 1.0 gpm available: DEMD-611-10LF



Single-Inlet Wall Mount Faucet DEMD-402LF - 8" spout DEMD-404LF – 6" spout





- 24 VAC to 9 VDC
- Adjustable maximum run time
- Pre-mixed water ■ Hardwire operation
- Adjustable sensor range
- Standard infrared sensing
- Remote control available (060967A) ■ 0.5 gpm outlet



Single-Hole Faucet DEMD-301LF



♦

Battery operation

■ Non-removable side mixer to adjust water temperature

Model with technician's mixer for removable side mixer to adjust temperature: DEMD-312LF

Standard infrared sensingAdjustable maximum run time, sensor range

Hardwire kit available for field conversion

■ Remote control available (060967A)

Optional 4" coverplate available

■ 0.5 gpm with vandal-resistant

wrench flat spray outlet

- Battery operation
- Pre-mixed water
- Standard infrared sensingAdjustable maximum run time
- Adjustable sensor range
- Optional 4" coverplate available
- Hardwire kit available for field conversion
- Remote control available (060967A)
- 0.5 gpm with vandal-resistant wrench flat spray outlet



Single-Hole Faucet DEMD-201LF



- Battery operation
- Above-deck electronics Pre-mixed water
- 0.5 gpm with vandal-resistant flat spray outlet
- Standard infrared sensing



Single-Hole Faucet DEMD-101LF



- Battery operationAbove-deck solenoid and battery
- Pre-mixed water
- 0.5 gpm with vandal-resistant
- wrench flat spray outlet Standard infrared sensing



Single-Hole Dual-Inlet Faucet with Side Mixer DEMD-211LF



- Battery operation
- Above-deck electronics
- Non-removable side mixer to adjust water temperature
- 0.5 gpm with vandal-resistant flat spray outlet
- Standard infrared sensing
- Model with technician's mixer for removable side mixer to adjust temperature: DEMD-212LF



Single-Hole Dual-Inlet Faucet with Side Mixer DEMD-111LF



- Battery operationAbove-deck solenoid and battery Non-removable side mixer to adjust
- water temperature ■ 0.5 gpm with vandal-resistant wrench flat spray outlet
- Standard infrared sensing
- Model with technician's mixer for removable side mixer to adjust temperature: DEMD-112LF



Single-Hole Electronic Soap Dispenser DESD-750 – Plug-in DESD-751 – Battery DESD-751-BL – Battery (Matte Black)



- Cast brass body
- Standard 1000 ml refillable soap bottle
- Standard infrared sensing Fits on decks up to 2" thick
- Blue LED indicator for low soap
- Plug-in kit available for field conversion



Single-Hole Electronic Soap Dispenser DESD-550 - Cast brass body DESD-250 - Non-metal version



- Solid machined shank with low profile spout
- Standard 800 ml soap bottle
- Standard infrared sensing
- Fits on decks up to 2" thick
- LED indicators: Yellow = low battery, Red = low soap
- Battery operation
- Hardwire kit available for field conversion

For additional information on the models shown here, as well as other available models, please go to www.specselect.com.





and temperature control is integrated so the faucet can be turned on in the same position as it was turned off for consistent temperature setting.





◎ હ



Single-Hole Faucet 22C631





■ Cast brass body

■ Vandal-resistant lever handle and 1.5 gpm outlet

Ceramic cartridge with rotational limit stop to limit turning of the handle into hot zone



4" Centerset Faucet 22C131 – Less pop-up (no hole) 22C331 – With metal pop-up



- Cast brass body
- Vandal-resistant lever handle and vandalresistant 1.5 gpm flow control outlet
- Ceramic cartridge with rotational limit stop to limit turning of the handle into hot zone



4" Centerset Faucet 501LF-HGMHDF





- Vandal-resistant lever handle and 0.5 gpm outlet
- Adjustable handle limit stop
 DIAMOND™ Valve
- .35 gpm available: 501LF-TGMHDF



Single-Hole Single-Inlet High-Rise Faucet with H₂Optics Technology







- Cast brass body
- Battery operation ■ 1.5 gpm vandal-resistant laminar with Agion® antimicrobial outlet
- Surface-mounted control box
- Optional 8" and 4" coverplates
- 10" recessed box available
- Adjustable sensing range and maximum run time
- Models also available with hardwire operation and additional outlets



3-Hole Single-Inlet 4" Centerset Faucet with H₂Optics Technology







- Cast brass body
- Battery operation ■ 1.5 gpm vandal-resistant laminar with Agion®
- antimicrobial outlet ■ Surface-mounted control box
- 10" recessed box available
- Adjustable sensing range and maximum run time
- Models also available with hardwire operation and additional outlets



Single-Hole Single-Inlet Faucet with H₂Optics Technology 590LF-LGHGMHDF









- Metal construction
- Battery operation 0.5 gpm vandal-resistant laminar outlet
- No external adjustments required
- Model with 4" coverplate: 591LF-LGHGMHDF



4" Centerset Faucet 515LF-HDF





- Includes metal pop-up ■ Vandal-resistant 6" elbow handle
- and 1.2 gpm outlet Adjustable handle limit stop
- DIAMOND Valve



Single-Hole Faucet 570LF-WFHDF



- 4" swing spout
- Vandal-resistant lever handle
- and 1.2 gpm outlet

 Adjustable handle limit stop

 Stainless steel ball



Widespread Single Control Faucet 24T2643



- Vandal-resistant 6" lever handle
- 4" to 16" adjustable centers
- 1.5 gpm outlet
- Stainless steel ball

Hardwire models shown on this page are available with battery backup; order 061047A separately. For additional information on the models shown here, as well as other available models, please go to www.specselect.com.





Single-Hole Faucet 534LF-PP



- 1 or 3-hole installation
- Order RP47973 for optional escutcheon
- Euro-motion ceramic valve



Single-Hole Faucet 559LF-PP



- 1 or 3-hole installationOrder RP78359 for optional escutcheon
- Euro-motion ceramic valve
- Also available in Brilliance® Stainless finish



Single-Hole Faucet 567LF-PP



- 1 or 3-hole installation
- Order RP78358 for optional escutcheon

Stainless finish

■ Euro-motion ceramic valve ■ Also available in Brilliance®



Single-Hole Faucet 573LF-PP



- 1 or 3-hole installation Order RP47973 for
- optional escutcheon ■ Euro-motion ceramic valve



Single-Hole Faucet 581LF-PP



- **◎** Ł
- 1 or 3-hole installation
- Order RP76702 for optional escutcheon
- Euro-motion ceramic valve



Single-Hole Faucet 87T104



- Cache outlet available ■ Cast brass body
- Vandal-resistant
- push-style handle Adjustable close time



Single-Hole Faucet 87T105



- Cache outlet ■ Cast brass body
- Vandal-resistant tip action lever handle ■ Adjustable close time



4" Centerset Faucet 86T1153



- Cast brass body
- Vandal-resistant tip action lever handles and outlet
- Adjustable close time



Round Bath Accessories IAO20130 24" Double Towel

Shelf IAO20118 18" Towel Bar IAO20126 18" Double Towel Bar

IAO20124 24" Towel Bar IAO20128 24" Double Towel Bar IAO20136 Double Robe Hook



with Cover IAO20140 Glass Shelf IAO20175 Double-Face Mirror IAO20160 Toilet Brush Holder IAOSD001 Soap Dish-Round IAOTB001 Tumbler Holder—



Square Bath Accessories IAO20830 24" Double



Towel Shelf IAO20818 18" Towel Bar

Towel Bar IAO20828 24" Double Towel Bar



IAO20826 18" Double IAO20824 24" Towel Bar IAO20836 Robe Hook



IAO20846 Towel Ring IAO20850 Tissue Holder with Cover

IAO20851 Tissue Holder IAO20840 Glass Shelf IAO20860 Toilet Brush Holder IAOSD002 Soap Dish—Square IAOTB002 Tumbler Holder— Square





Single-Hole Faucet 701LF-HDF



- Vandal-resistant push-style handle and outlet
- Adjustable close time



4" Centerset Faucet 2507LF-HDF



- Vandal-resistant push-style
- handles and outlet ■ Adjustable close time





4" Centerset Faucet 21C143



- Cast brass body
- Vandal-resistant 3" hooded lever handles
 CER-TECK® ceramic disc cartridge
- 1.5 gpm outlet



4" Centerset Faucet 21C142



- Cast brass body
- Vandal-resistant 4" hooded blade handles
 CER-TECK ceramic disc cartridge
- 1.5 gpm outlet



2529LF-LGHGMHDF



- Vandal-resistant wrist blade handles0.5 gpm outlet



6"-12" Widespread Faucet 23C333



- Vandal-resistant 3" hooded lever handlesCER-TECK ceramic disc cartridge
- 1.5 gpm outlet



6"-12" Widespread Faucet 23C342



- Vandal-resistant 3" hooded blade handles
 CER-TECK ceramic disc cartridge
- 1.5 gpm outlet





6"-16" Widespread Faucet 3549LF-WFLGHDF



- Vandal-resistant wrist blade handles
- Vandal-resistant aerator
- 1.2 gpm outlet



6"-12" Widespread Faucet 23C674



- Vandal-resistant 4" blade handles with
- sanitary hood

 CER-TECK ceramic disc cartridge
- Laminar flow control smooth-end spout (1.0 gpm)



6"-12" Widespread Faucet 23C642



- Vandal-resistant 4" hooded blade handles
- CER-TECK ceramic disc cartridge
- 1.5 gpm outlet



6"-16" Widespread Faucet 3579LF-WFLGHDF



- Vandal-resistant wrist blade handles
- 1.2 gpm outlet
- Rigid gooseneck spout





Exposed Electronic Urinal Flush Valve . 81T231HWA – Hardwire 81T231BTA - Battery





- Featuring H₂Optics® Sensing Technology
- Chloramine-resistant diaphragm
- Electronic override button
- Scratch-resistant replaceable lens window
- Factory set to 0.5 gallon flush—field adjustable ■ 81T231BTA-MMO: Battery-operated with

Concealed Electronic Washdown Urinal Flush Valve

1600T9001RI – Rough-in (hardwire)

■ Featuring H₂Optics Sensing Technology

Available in various rough-in and trim options

Factory plumbed for easy installation
 Factory set to 0.5 gallon flush—field adjustable

Note: Model must be installed on fixtures providing sufficient air gap protection against backflow.

■ Electronic manual override button

Side Mount Electronic Flush Kit

■ Compatible with multiple brands

Standard infrared sensing

Courtesy manual flush button

■ For use on 81T Teck® exposed manual flush

valves and 86T flush valves for washdown urinals

DEFM-100

■ Retrofit model ■ Battery operation

■ Vandal-resistant stainless steel cover

1600T9001TR - Trim (hardwire)

- manual mechanical override option
- Also available in Matte Black finish



Exposed Electronic Water Closet Flush Valve 81T201HWA – Hardwire 81T201BTA - Battery





- Featuring H₂Optics Sensing Technology
- Chloramine-resistant diaphragm
- Electronic override button
- Scratch-resistant replaceable lens window ■ Factory set to 1.6 gallon flush—field adjustable
- 81T201BTA-MMO: Battery-operated with manual mechanical override option
- 81T201BTA-42-MMO: Battery-operated with manual
- mechanical override; 1.1 gallon fixed flush volume ■ 81T201HWA-42-MMO: Hardwire with manual
- mechanical override; 1.1 gallon fixed flush volume Also available in Matte Black finish





Concealed Electronic Flush Valve for Wall-Hung Water Closet 1600T6102ARI – Rough-in (hardwire) 1600T6102ATR – Trim (hardwire)



- Featuring H₂Optics Sensing Technology
- Electronic manual override button
- Water closet and urinal models available
- Vandal-resistant stainless steel cover Available in various rough-in and trim options
- Factory plumbed for easy installation
- Factory set to 1.6 gallon flush—field adjustable



Exposed Electronic Flush Valves with Wall Mount Sensors 81T201-48-WMSHWA – Hardwire (water closet) 81T231-WMSHWA - Hardwire (urinal)







- Featuring H₂Optics Sensing Technology
 Chloramine-resistant diaphragm
- Electronic manual override button
- Vandal-resistant stainless steel cover ■ Factory set to 1.27 gallon flush for water closets
- and 0.5 gallon flush for urinals—field adjustable
- -48 models not field adjustable
- Only 81T201-48-WMSHWA is WaterSense® labeled









- Featuring H₂Optics Sensing Technology
- Electronic manual override button ■ Water closet and urinal models available
- Vandal-resistant stainless steel cover
- Available in various rough-in and trim options
- Factory plumbed for easy installation
- Factory set to 1.6 gallon flush—field adjustable



Electronic Flush Retrofit Kit for Sloan®/Zurn® stop 81T201BTA-30-MMO – Battery (water closet) 81T231BTA-30-MMO - Battery (urinal)





- Retrofit model for Sloan®/Zurn® stop
- Featuring H₂Optics Sensing Technology
- Complete valve less stop, cover tube and wall flange ■ Chloramine-resistant diaphragm
- Electronic override button
- Scratch-resistant replaceable lens window
- Factory set to 1.6 gallon flush for water closets and 0.5 gallon flush for urinals—field adjustable



Electronic Flush Retrofit Kit 81TWCBTRKA – Water closet 81TURBTRKA – Urinal





- Retrofit model
- Featuring H₂Optics Sensing Technology
- Battery operation
- Converts manual exposed flush valves to electronics
 New diaphragm, seat and filter screen included
- For hardwire kit, order 061069A
- Scratch-resistant replaceable lens window
- Factory set to 1.6 gallon flush for water closets and 0.5 gallon flush for urinals—field adjustable





Solar Exposed Water Closet Flush Valve 81T201SP-MMO (not WaterSense® labeled) 81T201SP-42-MMO; 81T201SP-48-MMO



- Solar-powered with battery assist
- Hands-free operation

Urinal Flush Valve 81T231

<u>\$</u>

- Push-button mechanical override
 For 1-1/2" top inlet water closet fixture
 Optional 24-hour automatic flush, factory set to OFF
- 81T201SP-MMO: Factory set to 1.6 gpf*
- 81T201SP-42-MMO: Factory set to 1.1 gpf
- 81T201SP-48-MMO: Factory set to 1.27 gpf

Chloramine-resistant diaphragm
 ADA vandal-resistant non-hold open handle
 Factory set to 0.5 gpf—field adjustable

Batteries required and included



Solar Exposed Urinal Flush Valve 81T231SP-MMO (not WaterSense® labeled) 81T231SP-05-MMO; 81T231SP-19-MMO



- Solar-powered with battery assist

- Hands-free operation
 Push-button mechanical override
 For 3/4" top inlet urinal fixture
 Optional 24-hour automatic flush, factory set to OFF ■ 81T231SP-MMO: Factory set to 0.5 gpf*
- 81T231SP-05-MMO: Factory set to 0.125 gpf
- 81T231SP-19-MMO: Factory set to 0.5 gpf
- Batteries required and included



Flush Valve for Washdown Urinal 86T505



- ADA vandal-resistant handle Back inlet stop for 1/2" supply Factory set to 0.5 gpf—field adjustable

Note: Model must be installed on fixtures providing sufficient air gap protection against backflow.



Water Closet Flush Valve

Factory set to 1.1 gpf

Chloramine-resistant diaphragmADA vandal-resistant non-hold open handle

81T201: Factory set to 1.6 gpf—field adjustable
81T201-42 and 81T201-542:

81T201

Electronic Washdown Urinal Flush Valve DEMD-86505



- Battery operation
- Standard infrared sensing
- Adjustable sensor range
- Remote control available
 Factory set to 0.5 gpf—field adjustable with optional remote

Note: Model must be installed on fixtures providing sufficient air gap protection against backflow.

^{*}Field adjustable—EZ Adjust™ screw allows flush to be adjusted without shutting off water supply. For additional information on the models shown here, as well as other available models, please go to www.specselect.com.

BECAUSE OUR PRODUCTS DO THEIR JOB, YOU'RE FREE TO CONCENTRATE ON YOURS.

Successful healthcare depends on reliable tools. Delta® Faucet offers a broad range of products for the industry—and we're always designing new innovations, to offer professionals even more convenience.







Electronic Wall Mount Faucet 1501T4670





- Featuring H₂Optics[®] Sensing Technology ■ Wall mount rigid gooseneck spout with integral sensor in base
- Adjustable sensing range and time out
- Battery operation
 Smooth-end spout with 1.5 gpm laminar flow control outlet



Electronic Deck Mount Faucet 1501T3370







- Featuring H₂Optics Sensing Technology
- Rigid gooseneck spout with integral sensor in base
 Adjustable sensing range and time out
- Battery operation
- Smooth-end spout with 1.5 gpm laminar flow control outlet
- 4" and 8" coverplates available for order



(060651A for use with H₂Optics Sensing Technology and Proximity® Sensing Technology Lavatory Products)

Designed so healthcare facilities can continue to follow infectious control procedures.

Switch Settings

- ON Solenoid goes into continuous run so water lines can be flushed with high
 - temperature water.

 Refer to specific product specification sheets as higher temperatures may damage sensor components.
- AUTO Faucet functions according to regular settings.
- OFF Solenoid is blocked from operating so cleaning staff can clean sink without faucet operating.

General Surgeon Scrub Up



Surgeon Scrub Faucet 54T5432A



- Floor mount self-close double foot pedal valve
- Deck mount rigid/swivel gooseneck spout
- Vandal-resistant 1.5 gpm laminar with Agion® antimicrobial outlet



Surgeon Scrub Faucet 54T5332A





- Wall mount self-close double foot pedal valve
- Deck mount rigid/swivel gooseneck spout
 Vandal-resistant 1.5 gpm laminar with Agion®
- antimicrobial outlet

Hardwire models shown on this page are available with battery backup; order 061047A separately. For additional information on the models shown here, as well as other available models, please go to www.specselect.com. An electronic product that provides leading functionality combining ease of use and ADA compliance while maintaining a sleek, low-profile design.





Push-Button Electronic Shower System 860T178





- Recessed metal box mount with thermostatic mixing valve
 Field adjustable shower time
- 30° vandal-resistant forged shower head
- Hardwire operation
- 1.5 gpm shower head
- Transformer required, order separately







- Dual-check in-line vacuum breaker
 1/4" I.D. 10 serrated nozzle outlet
 Maximum 1.5" diameter deck hole
- W6700-9 Dual-check in-line vacuum breaker
 1/4" I.D. 10 serrated nozzle outlet
 2-hole installation at 2.75" centers

Deck Mount Mixing Faucet



Single Deck Mount Water Faucet W6600-10

- Angle atmospheric vacuum breaker
 1/4" I.D. 10 serrated nozzle outlet
- Maximum 1.25" diameter deck hole
- W6210GAS

Deck Mount Turret

- Single ball valve in deck mount turretAvailable in various configurations and services



- Air
- Cold Water
- Natural Gas
- Vacuum

Refer to www.specselect.com for Valve/Service combination availability.



Deck Mount Turret W6220GAS



- Two ball valves at 90° in deck mount turret

 Available in various configurations
- and services



Pure Water Faucet W6635DW

- Self-close Celcon® valveGooseneck spout with Tygon® liner

Hardwire models shown on this page are available with battery backup; order 061047A separately. For additional information on the models shown here, as well as other available models, please go to www.specselect.com.

OUR UNIVERSAL DESIGN SOLUTIONS OFFER SAFETY WITH STYLE.

For more than half a century, Delta Faucet Company has studied the daily relationships between people and water. Our observations have led to the discoveries of unspoken needs—and from there to the creation of groundbreaking designs and technologies.

Through our broad array of product innovations, we continue to make a difference for people of all ages and abilities in all settings: helping their interactions with water to become more accessible, more enjoyable and more transformative.





Traditional



Décor Assist Tissue Holder/Assist Bar 41350

- 6" long7/8" diameter assist barPivoting arm



Décor Assist Corner Shelf/Assist Bar 41316

- 8-3/4" wide7/8" diameter assist bar



Décor Assist Double Towel/Assist Bar 41319

- 24" long7/8" diameter assist bar

Transitional



Décor Assist Tissue Holder/Assist Bar 41450

- 6" long7/8" diameter assist barPivoting arm



Décor Assist Corner Shelf/Assist Bar 41416

- 9-1/2" wide7/8" diameter assist bar



Décor Assist Double Towel/Assist Bar 41419

- 24" long7/8" diameter assist bar

Contemporary



Décor Assist Tissue Holder/Assist Bar 41550

- 6" long7/8" diameter assist barPivoting arm



Décor Assist Corner Shelf/Assist Bar 41516

- 9-1/8" wide7/8" diameter assist bar



Décor Assist Double Towel/Assist Bar 41519

- 24" long7/8" diameter assist bar

















Available on

Available on select models only. select models only.

The products on this page are shown in Chrome.

While Décor Assist products meet ADA load requirements, they are not ADA-compliant due to size standards.



Grab Bars



1-1/2" x 24" Grab Bar 40124-SS



- Brilliance® Stainless finish
- For persons up to 500 pounds
- Concealed mounting
- Also available in lengths of 18, 30, 36, 42, and 48



1-1/4" x 24" Grab Bar 41124-SS



- Brilliance® Stainless finish
- For persons up to 500 pounds
- Concealed mounting Also available in lengths of 30, 36, and 42



1-1/4" x 24" Grab Bar With Decorative Flanges 41224-SN



- Satin Nickel finishFor persons up to 500 pounds

 - Concealed mounting
 Also available in 18" length

Traditional



- 41612 12" Decorative ADA Grab Bar 41618 18" Decorative ADA Grab Bar 41624 24" Decorative ADA Grab Bar 36" Decorative ADA Grab Bar
- 1-1/4" diameterFor persons up to 500 poundsConcealed mounting
- 41642 42" Decorative ADA Grab Bar











Transitional

Contemporary



- 41712 12" Decorative ADA Grab Bar 41718 18" Decorative ADA Grab Bar 41724 24" Decorative ADA Grab Bar 41736 36" Decorative ADA Grab Bar 41742 42" Decorative ADA Grab Bar
- 1-1/4" diameter For persons up to 500 pounds ■ Concealed mounting















1-1/4" diameterFor persons up to 500 poundsConcealed mounting







select models only.





Available on

Angular Modern



- 41912 12" Decorative ADA Grab Bar 41918 18" Decorative ADA Grab Bar
- 24" Decorative ADA Grab Bar 41936 36" Decorative ADA Grab Bar 41942 42" Decorative ADA Grab Bar
- 1-1/4" diameterFor persons up to 500 pounds ■ Concealed mounting











Available on select models only.

The products on this page are shown in Chrome.





Single-Lever Kitchen Faucet 100LF-HDF





- Vandal-resistant elbow handle and National-resistant endow handle
 1.5 gpm outlet
 Swivel spout
 3-hole installation
 Adjustable handle limit stop
 DIAMOND™ Valve



Single-Lever Kitchen Faucet 101LF-HDF





- Vandal-resistant elbow lever handle and 1.5 gpm outlet

- Swivel spout
 Single-hole installation
 Adjustable handle limit stop
 DIAMOND Valve



8" Deck Mount Single-Lever Kitchen Faucet 400LF-HDF





- Matching finish side sprayer
 Vandal-resistant elbow lever handle and 1.5 gpm outlet
 4-hole installation
 Adjustable handle limit stop

- DIAMOND Valve



Single-Lever Utility Faucet 710LF-HDF





- Vandal-resistant elbow handle and 1.5 gpm outlet
- 10"-high rigid spout
- 2-hole installationAdjustable handle limit stopDIAMOND Valve



Single-Lever Pantry Faucet 27C643



- Vandal-resistant lever handle
- 1.5 gpm outlet
- Single-hole installation
 Rigid/swivel gooseneck spout
 CER-TECK® ceramic disc cartridge





8" Cast Deck Mount Faucet 26C3942



- Vandal-resistant 4" hooded blade handles
- 3-hole installation

- 1.5 gpm outlet
 Rigid/swivel gooseneck spout
 CER-TECK® ceramic disc cartridge



Single Shank Mixing Faucet 25C3847



- Vandal-resistant 2-1/2" balanced lever handles
- Single-hole installation
- 1.5 gpm outlet
- Rigid/swivel gooseneck spoutCER-TECK ceramic disc cartridge



8" Below Deck Mount Faucet 27C2923



- Vandal-resistant 3" hooded lever handles
- 3-hole installation
 Vandal-resistant 1.5 gpm laminar with Agion® antimicrobial outlet

 Rigid/swivel gooseneck spout

 CER-TECK ceramic disc cartridge



4" Cast Deck Mount Faucet 27C4844



- Vandal-resistant 4" blade handles with sanitary hood
- 2-hole installation

- 1.5 gpm outletRigid/swivel gooseneck spoutCER-TECK ceramic disc cartridge



8" Center Wall Mount Pre-Rinse Faucet 55C1513



- Vandal-resistant 3" hooded lever handles
- Supplied with standard 1.6 gpm spray outlet and water/energy-saving 1.2 gpm option
- Includes auto shut-offCER-TECK ceramic disc cartridge







■ 4" Hooded Blade (Available with optional red/ blue temperature indicator)





■ 3" Hooded Lever (Available with optional red/ blue temperature indicator)





■ 4" Blade with Sanitary Hood (Available with optional red/blue temperature indicator—shown above)



F



■ 6" Wrist with Sanitary Hood







8" Center Wall Mount Service Sink Faucet 28C2383



- Cast brass body
- Vandal-resistant 3" hooded lever handles
- Adjustable top/bottom brace
- Body-mounted angle vacuum breaker with garden-hose end
- Includes integral check stops
 CER-TECK® ceramic disc cartridge



8" Center Wall Mount Service Sink Faucet 28C8073



- Cast brass body
- Vandal-resistant 3" hooded lever handles
- Spout end vacuum breaker with garden-hose end
 Includes 48" hose and stainless steel hanger
 Includes integral check stops

- CER-TECK ceramic disc cartridge



8" Center Wall Mount Service Sink Faucet 28T9

- Cast brass body
- Metal cross handles
- In-line vacuum breaker with garden-hose end
- Includes integral stops
- Compression cartridge



8" Center Wall Mount Service Sink Faucet 28C9LH



- Cast brass body
- 4" metal lever handles
- In-line vacuum breaker with garden-hose end
- 1/4-turn ceramic cartridge
- Includes integral stops



8" Center Wall Mount Sink Faucet 28C4434




- 4" blade handles with sanitary hood ■ Vandal-resistant 1.5 gpm outlet
- 11" tubular swing spout
- CER-TECK ceramic disc cartridge



- Cast brass body4" hooded blade handles
- Vandal-resistant 1.5 gpm outlet
- 8" long spout—swings 360°

8" Center Wall Mount Service Sink Faucet 28P4402LF

Less integral stops



THE DELTA® MULTICHOICE® UNIVERSAL VALVE

FLEXIBILITY THAT SAVES TIME AND MONEY.

Installing the MultiChoice Universal Valve first makes it easier to change style, finish and functionality later. Because there's no need to alter plumbing behind the wall, you can save time, effort and money on mid-construction changes and renovation updates.



One rough. Unlimited possibilities.

Square Plasterguard

The size of a standard tile allows for simple 90° cuts. Snaps into place with no tools required to remove.

Mounting Bracket

Provides a sturdy method to secure the valve to a stringer and prevents rocking.

R10000-UNWS MultiChoice® Universal Valve Body

WS—with stops recommended for Commercial applications.



Three Connection Types -

Provides universal connection options for every type of piping—IPS, PEX and UNIVERSAL.

Heat-Resistant Pressure Test Cap

Allows for air or water testing up to 300 psi, before the valve cartridge is installed. Easy access for flushing out the system.



Single-Function Pressure-Balanced Valve Cartridge

Functions with a single control for temperature only.



Dual-Function Pressure-Balanced Valve Cartridge

Offers independent control of temperature and volume by balancing the pressure of hot and cold water.



Dual-Function Thermostatic Valve Cartridge

Keeps water temperature consistent by actually measuring and monitoring the temperature of the water and automatically adjusting the water mix to maintain a more precise water temperature.

Delta® products offer trim choices in traditional, transitional, and contemporary styles—making it easy to find a look that realizes the vision of any design, construction or facility team.



TRADITIONAL



TRANSITIONAL



CONTEMPORARY

1

Adjustable Shower Head

Allows users to select their preference among full, massage and combination settings.

Diverter Valve

Makes it easy for the user to switch between the shower head and hand shower.

MultiChoice® Universal

Provides unparalleled

cartridge options.

flexibility with multiple







Tub and Shower with H₂Okinetic® Shower Head T13H283 - Trim R10000-UNWS – Rough-in





- MultiChoice® Universal pressure-balance tub and shower
- H₂Okinetic[®] water-efficient 1.5 gpm shower head
- Vandal-resistant lever blade handle ■ Escutcheon with non-removable
- red/blue marking





Shower Only T13H123 - Trim R10000-UNWS - Rough-in





- MultiChoice Universal pressure-balance shower
- Touch-Clean® 3-setting 1.75 gpm shower head
- Vandal-resistant lever blade handleEscutcheon with non-removable
- red/blue marking





Tub and Shower T13H232 - Trim R10000-UNWS – Rough-in





- MultiChoice Universal pressure-balance tub and shower
- Touch-Clean water-efficient 1.5 gpm shower head
 Vandal-resistant lever handle
- Escutcheon with non-removable red/blue marking



Stainless Steel Bar with

to spec, this stainless steel bar serves as both a slide bar and an ADA-

compliant bar.

When installed according

T13H333

ADA Slide



Shower Only T17TH125 - Trim R10000-UNWS - Rough-in







- TempAssure® thermostatic shower ■ Touch-Clean 3-setting 1.75 gpm shower head
- Tub and shower trim models available
- Vandal-resistant lever handle
- Non-removable red/blue indicators



Hand Shower with Wall Bar T17TH155 - Trim R10000-UNWS - Rough-in



- TempAssure thermostatic shower
- Touch-Clean 2-setting 2.5 gpm hand shower
- 24" stainless steel bar with ADA adiustable slide
- Vandal-resistant lever handle
- Non-removable red/blue indicators



Tub and Shower T13490 - Trim R10000-UNWS - Rough-in





- MultiChoice Universal pressure-balance
- tub and shower

 Touch-Clean 1.75 gpm shower head
- Vandal-resistant lever blade handle
 Red/blue indicators





Tub and Shower with Push-Button Diverter T13691 – Trim R10300-UNWS – Rough-in





- MultiChoice Universal pressure-balance tub and shower
- Touch-Clean 1.75 gpm shower head ■ Integral push-button diverter
- Red/blue indicators





Push-Button Electronic Shower System 860T167 - Hardwire 861T167 - Battery



- Recessed metal box with pressurebalance mixing valve
- 30° vandal-resistant handle and 1.5 gpm shower head
- Available with various mixing and shower head options
- Field adjustable shower time

For additional information on the models shown here, as well as other available models, please go to www.specselect.com. WaterSense® icons shown on this page apply only to the shower heads within the product grouping.









H₂Okinetic® Multi-Setting Shower Head 52637-15-PK





5 Setting1.5 gpm













H₂Okinetic Water-Efficient Shower Head RP46384



Single Setting1.5 gpm





H₂Okinetic Shower Head 52655



■ Single Setting







In2ition® H₂Okinetic 4-Setting Shower 58473









Integrated shower head and hand shower1.75 gpm











In2ition H₂Okinetic 4-Setting Shower 58471-PK





Integrated shower head and hand shower2.5 gpm

















In2ition H₂Okinetic 4-Setting Shower 58472





■ Integrated shower head and hand shower













Touch-Clean® Shower Head RP43381













Single Setting1.75 gpm

Touch-Clean Shower Head RP38357





Touch-Clean Shower Head 52672-15-BG





■ Single Setting ■ 1.5 gpm







H₂Okinetic 5.5" Raincan Single-Setting Shower Head RP70175

■ 1.75 gpm RP70175-15

■ 1.5 gpm











H₂Okinetic 6" Raincan Single-Setting Shower Head RP70171

■ 1.75 gpm RP70171-15

■ 1.5 gpm

RP70171-20 ■ 2.0 gpm











H₂Okinetic 6.5" Raincan Single-Setting Shower Head RP70173









30° Vandal-Resistant Cast Wall Mount Shower Head 060793A

■ 2.0 gpm



060991A ■ 1.75 gpm 🕚









30° Vandal-Resistant Forged Brass Wall Mount Shower Head 063214A



063196A ■ 1.5 gpm





Bent Shower Arm and Flange 060710A

■ Metal set screw wall flange











Premium Hand Shower Only

H₂Okinetic® Hand Shower Only 59433-PK

3 Setting1.75 gpmPause feature

59434-15-BG

5 Setting1.5 gpmPause feature

Angular Modern Shower Kit Less Hand Shower 51500



- U6500 hand shower mount24" angular modern grab bar, 1-1/4" diameter
- 60"-82" stretchable metal hose
- Square wall elbow included



















- U6500 hand shower mount
- 24" round contemporary
- grab bar, 1-1/4" diameter

 60"–82" stretchable metal hose
- Round wall elbow included





ADA Grab Bar Hand Shower Mount U6500



- Fits 1-1/4" square grab bars Fits 1-1/2" or 1-1/4" round grab bars







Premium Hand Shower Only 59426-PK









■ 1.75 gpm









H₂Okinetic Hand Shower Only 59445-PK

Premium Hand Shower Only

59434-18-PK

5 Setting1.75 gpmPause feature









- 5 Setting1.75 gpmPause feature








Touch-Clean® Hand Shower 59462-B15-BG



- 2 Setting1.5 gpmPause feature









H₂Okinetic® Shower Mount Hand Shower 54433-PK





- 3 Setting1.75 gpmPause feature





H₂Okinetic Hand Shower with Slide Bar 51567

Single Setting1.75 gpm












H₂Okinetic Shower Mount Hand Shower 54421-PK



Single Setting1.75 gpm







H₂Okinetic Shower Mount Hand Shower 54445-PK



- 5 Setting1.75 gpmPause feature







All hand showers on this page are shown in Chrome, and come without wall elbow, shower arm and flange.



Bathroom



24" Brass Towel Shelf with Towel Bar

- Concealed mountingMounting hardware included



24" Brass Towel Shelf with Double Towel Bar 43424

- Concealed mountingMounting hardware included



1" x 5' Curved Shower Rod with Brackets 42205

- Adjustable lengthOval design prevents rotationAlso available in 6' length



Recessed Paper Holder with Plastic Roller

- Plastic spring-activated rollerTwin side-by-side model available



Recessed Extra Roll Paper Holder 45470

- Plastic spring-activated rollerStores extra roll behind roll in use
- Twin Paper Holder 45272
 - Two brass spring-activated rollers

Drains



Grid Strainer 33T260-1

- Open grid strainer less overflow holes
 With overflow holes model available (33T260)
 Less overflow holes, with splash reduction drain cover (33T260-1DC)



Grid Strainer 33T290-1



- Offset open grid strainer less overflow holes
 With overflow holes model available (33T290)
 Less overflow holes, with splash reduction drain cover (33T290-1DC)



Cast P-Trap 33T311 - 1-1/4" 33T360 - 1-1/2"

- With cleanoutAdjustable





How to Use This Price Book



The Delta® Commercial Price book provides you with the details you need to choose the right product for your commercial application. From lavatory faucets, to flush valves, healthcare specialties, tub/shower, drainage and parts, Delta commercial products offer a variety of plumbing products.

For your convenience, our product selections are divided into two sections, **Quick Pick** and **Model Options**.

Quick Pick (starting at page C1) provides you with a list of our most popular models and is set up to simplify your ordering process.

Model Options (starting at page C61) allows you to select a product to meet your unique commercial needs.

SMART SOLUTIONS

Style meets performance with Delta commercial products that not only provide long life, but also enhance their environments. From the beginning, the Delta brand has sought out innovative solutions to help people use water in better ways. These smart features, found across our offerings, are helping to improve the lives of more and more people every day.

Water-Efficient Products

All Delta products that are water-efficient provide a flow rate that's lower than the industry standard. Specific flow rates are noted in the product descriptions.

△ ADA – some people and some local codes, require fixtures that are compliant with the Americans with Disabilities Act. If someone may visit who has special needs, or if you believe future buyers might appreciate this feature, Delta commercial products offer a range of compliant fixtures.

♂ Code-Compliant – products compliant with State and Federal drinking water legislation.

Denotes water-efficient products.

H₂Optics Sensing Technology – a hands-free innovation which accurately senses the user's distance, regardless of external factors such as light reflection, clothing color and textures or dryness of one's skin, providing consistent and dependable results.

Proximity Sensing Technology – the entire faucet body acts as a sensor, activating the faucet when the user's hand comes within 4" of the spout.

— **DIAMOND** Valve and $\frac{3}{8}$ " copper supplies with universal fittings ($\frac{3}{8}$ " compression, $\frac{3}{8}$ " sweat, or $\frac{1}{2}$ " I.P.S.).

Battery Backup – provides battery power backup for hardwire electronic models; order 063268A for surface mount box and 063269A for recessed box.

Suffix Abbreviations & Symbols Key





Optional Suffixes:

AC = Adjustable Centers

BL = Matte Black

BT = Battery-Operated

BTA = Battery-Operated

HGM = 0.5 gpm @ 60 psi flow rate

HW = Hardwire-Operated

HWA = Hardwire-Operated

LS = Limited Swing Gooseneck Spouts

NS = Nickel Stainless

QD = Quick Disconnect

R's = Rigid Swivel Spouts

RI = Rough-In Only

S's = Swing Spouts

SS = Brilliance® Stainless Finish

TGM = 0.35 gpm @ 60 psi flow rate

TI = Temperature Indicators on handles

TR = Trim Only

Water-Efficient Product (meets CalGreen standards) Kitchen Faucets: Flow Rate of 1.8 gpm or 1.5 gpm versus Industry Standard ASME A112.18.1/CSA B125.1 of 2.2 gpm.

Lavatory Faucets: Flow Rate of 1.2 gpm or lower versus Industry Standard ASME A112.18.1/CSA B125.1 of 2.2 gpm.

Shower Heads and Hand Showers: Flow Rate of 1.5 to 2.0 gpm versus Industry Standard ASME A112.18.1/CSA B125.1 of 2.5 gpm.

Tub/Showers: Valve rated at minimum 1.2 gpm (4.5 L/min) for pressure-balance; 1.7 gpm (6.4 L/min) for thermostatic at 45 psi (310 kPa). ASSE.1016/ASME A112.1016/CSA B125.16



WaterSense® Labeled Product Lavatory Faucets: Flow Rate of 1.2 gpm or 1.0 gpm versus Industry Standard ASME A112.18.1/CSA B125.1 of 2.2 gpm.

Shower Heads and Hand Showers: Flow Rate of 1.5 or 2.0 gpm versus Industry Standard ASME A112.18.1/CSA B125.1 of 2.5 gpm.



Urinal Flush Valves = Maximum Flush Volume of 0.5 gallons (1.9 liters) per flush versus Industry Standard ASME A112.19.2/CSA B45.1 of 1.0 gallons (3.8 liters)

Water Closet Flush Valves = Maximum Flush Volume of 1.1 gpf or 1.27 gpf versus Industry Standard ASME A112.2.



(FP) = Focus Product



ADA Single and two handle models displaying this nationally recognized symbol are accessible to and usable by physically challenged persons and meet all the requirements of ICC/ANSI A117.1 and ADAAG for an operable part.

Kitchen Spray Symbols


Full	Aerated	1.5 Aerated	2.0 Aerated	1.5 l
Spray	Stream	Stream	Stream	Sp

Hand Shower, Shower Head, and In2ition® Spray Symbols

































Complete Table of Contents

NUMBER

DESCRIPTION

MODEL/

SERIES #

MODEL/ SERIES #	DESCRIPTION	PAGE Number
TUB/SHOWER ROUGH-INS		
	MultiChoice® Rough-Ins	C34
	MultiChoice® Rough-In for	
	Push-Button Diverter	C35
R10700-UNWS	MultiChoice® Rough-In with	
	Diverter Valve for Dual Showers	C35
TRIM-PRESSURE B	ALANCE	
T13090 to T13491	Monitor® 13 Series	
	Tub/Shower Trim	C38-C40
T13391 to T13691	Monitor 13 Series Tub/Shower	
	Trim with Push-Button Diverter	C40
T13H1 & T13H2	Pressure Balance T & S,	
	MultiChoice® Universal	C40-C41, C62-C64
T13H3	Pressure Balance T & S with	
	Diverter for Dual Showers,	
	MultiChoice® Universal	
T14238 to T14497	Pressure Balance Trim	C35-C37
TRIM-THERMOSTAT	ric	
T17TH1	Thermostatic T & S,	
	MultiChoice® Universal	C42, C67-C68
PARTS & ACCESSO	RIES	
40000 Series	Shower Rods	C59
	Shelving	
40000 Series	Recessed Paper and	
	Tissue Holders	
	Grab Bars	C53-C56
50000 Series	Shower Heads/ Hand Showers/	
	Wall Bars	C44-C51
RPW124HDF to		
RPW336HDF	HDF Hand Shower Assemblies	C43
LAVATORY		
SINGLE HANDLE		
22C	Single Control Single Hole and 4"	
	Centerset Faucets - Ceramic	
	Cartridge	C8, C73-C74
23C10	Single Basin Faucets -	
0.470	CER-TECK®Single Control Lavatory	C78
2412		
501LF-HDF to	Faucets	679
	Single Handle 4" Centersets -	
323LF-ПDF	Sirigle Hariule 4 Cerilersets - DIAMOND™ Valve	C7
52/I E 501I E	Single Handle Project-Pack	
570LF-WFHDF to	Sirigie Haridie i Toject-i ack	00
	Single Handle Utility Faucet	C12
5/01 F-06FLH	Sirigio Fidridio Stility I dubbt	512
5/0LF-06ELH 710LF-HDF to		
710LF-HDF to	Single Control Widespread Faucets -	
710LF-HDF to	Single Control Widespread Faucets - DIAMOND Coated Ceramic Cartridge.	C12

	SERIES #		NUMBER
	LAVATORY (cont'd)		
1	TWO HANDLE	T II II O I I I I	
V)	210	Two Handle Centerset Faucets - CER-TECK®	00 010 000 070
1	230	Two Handle 6-12" Widespread	69-610, 669-672
v	230	Faucets - CER-TECK®	C10_C11 C75_C77
\$	2529LF-HDF	Tadoots - OLIT-TEON	010-011, 075-077
_	to 2529LF-HDM	Two Handle 4" Centersets -	
		Brass Cartridge	C9
₫	3549LF-WFHDF to		
	3549LF-WFLGHDF	Two Handle Low Spout	
		Widespreads - Brass Cartridge	C10
$\sqrt[3]{}$	3579LF-WFHDF to		
	3579LF-WFLGHDF		
		Widespreads - Brass Cartridge	C11
	SINK FAUCETS		
	SINGLE HANDLE DECK	MOUNT KITCHEN	
Ø	100LF-HDF,		
	101LF-HDF &		
	400LF-HDF	Single Handle Deck Mount Kitchen	
		Faucets - Single Hole, 3-hole and	
1	0700	4-hole	C2
V)	2/06	Single Hole Pantry Faucets -	0.00
		CER-TECK®	C95
_#	TWO HANDLE DECK M	OUNT KITCHEN	
√	26C3	Two Handle 8" CAST Deck Mount	
1	0704	Faucets - CER-TECK°	C2-C3, C81-C85
V)	2/01	IWO Handle 8" Below Deck Mount	000
K	0700	Faucets - CER-TECK*	686
•	2102	Faucets - CER-TECK®	C3. C87-C89
	TWO HANDLE DECK M	OUNT BAR	,
₫	25C3	Single Shank Mixing Faucets -	
4		CER-TECK®	C4, C80
Ø	27C4	Two Handle 4" CAST Deck Mount	
1		Faucets - CER-TECK*	C4, C90-C94
√)	2171LF-WBHHDF	Two Handle 4" Deck Mount	
		Faucet - Brass Stems	C4
	TWO HANDLE WALL M		
	28C2	Two Handle 8" CAST Wall Mount	
		Service Sink Faucets - Rigid Spout -	05 000 007
1	0004	CER-TECK®	C5, C96-C97
v	2864	Two Handle 8" CAST Wall Mount	CE C00 C00
1	2006	Service Sink Faucets - CER-TECK° Wall Mount Sink Faucets	65, 698-699
Y		Two Handle 8" CAST Wall Mount	6100-6101
	2000	Rough Chrome Faucets -	
		Rigid Spout - CER-TECK®	C102
	28C9LH	Two Handle 8" Wall Mount Rough	0 102
		Chrome Mon Sink Faucet	C103
₫	28P Series	Two Handle 8" CAST	
		Wall Mount Faucets	C5
	28T9	Two Handle 8" Wall Mount Rough	
		Chrome Mop Sink Faucet	
	28T910 & 28T911	Mop Sink Accessories	

Complete Table of Contents





Complete Table of Contents

MODEL/ SERIES #	DESCRIPTION	PAGE NUMBER	MODEL/ SERIES #	DESCRIPTION	PAGE NUMBER
MIXING V R2570-MIXLE	- - ,		FLUSH VALVES DEMD-86405 to	(cont'd)	
R2910-MIXLF	- &		DEMD-86515	Electronic Flush Valves	
7 R3070-MIXLF	Mixing Valves	C27		for Washdown Urinals	C32-C33
DRAINAG	E		METERING		
33T2 Series	Open Grid Strainers		♂ 86T & 87T	Metering Handwash Valve	
	Cast P Traps		701LF-HDF 2507LF-HDF to	Metering Handwash Valve	C13
SURGEON	N SCRUB UPSelf Close Foot Pedal Valves			Metering Handwash Valves	C13
5 54T5	Self Close Foot Pedal Valves	C106			
	SE FAUCETS		ELECTRONICS PROXIMITY' SEI	NSING TECHNOLOGY FAUCETS	
550 Sarias	Pra_Rinea Faucate - CFR_TFC	`K® C5 C107			
55P1513	Pre-Rinse Faucets - CER-TEC8" Center Wall Mount Pre-Rin	nse		Proximity® Sensing Technology	
	less Wall Bracket	C107		Faucets - Battery & Hardwire -	. 040
FLUSH V	AI VES		od 59∩TP∆	Single Hole, 4" and 8" Deck Mo Proximity Sensing Technology	unt C16
MANUAL	-		33011 /	Faucets - Hardwire & Battery -	
	Exposed - Manual Flush Valv			Single Hole, 4" and 8" Deck Mo	unt C15, C125
	Concealed - Manual Flush Va				,
86T5	Urinal Washdown Flush Valve	es C33, C109	• • • • • • • • • • • • • • • • • • • •	Faucets - Hardwire & Battery -	
ELECTRO				4" Centerset Deck Mount	C15, C129
81T***BTA	Exposed - Electronic Battery Flush Valves	C28-C29	♂ 620TPA to 621TPA	Proximity® Sensing Technology Faucets - Hardwire & Battery	C14 C131-C132
		C115-C116	♂ 630TPA3 to 631TPA3.	Proximity® Sensing Technology	
811**MMO	Exposed - Electronic Battery Flush Valves with Manual		U.O. 11 * 051101	Faucets - Hardwire & Battery - Ai	a°C14, C134-C135
	Mechanical Override		590LF-HGMHDF to	NG TECHNOLOGY FAUCETS	
		C114-C116		H ₂ Optics® Sensing Technology	
81T***HWA	Exposed - Electronic Hardwin		OOTEL EUROVIIIDI	Faucets - Battery - Single Hole	
	Flush Valves	C29-C30, C116-C117		and 4" Deck Mount	
81T*** Solar.	Exposed - Solar Electronic Ha	ardwire	✓ ELAVT0001ARI	Rough-In only for Control Box #	1 C25, C123, C125
	Flush Valves	C29, C31,	✓ ELAVT0008ARI	Rough-In only for Control Box #	8 C25, C123, C126
81T201WMS	LIM/A to	C114	ॐ 590T	H ₂ Optics® Sensing Technology	
81T231WMS		nio		Faucets - Hardwire & Battery -	
01123177170	Exposed Flush Valves with		- A	Single Hole, 4" and 8" Deck Mo	unt C23, C123
	Wall Mount Sensor		♂ 591T		
81TWCBTRK/	A to			Faucets - Hardwire & Battery -	
81TURBTRKA	Electronic Exposed Flush Val		d 4500T0 0 1501T-	4" Centerset	C23, C127
1000=000	Retrofit Kit		★ 1500T3 & 1501T3	H ₂ Optics® Sensing Technology	
1600T6 Series	sH ₂ Optics® Sensing Technolog Concealed Electronic	у		Gooseneck Faucets - Hardwire & Battery - Single Hole, 4" and	
	Toilet/Urinal Flush Valves	C31 C118-C121		8" Deck Mount	C22 C127 C120
DFFM-100	Electronic Side Mount Flush		♂ 1500T4 & 1501T4		023, 0137-0130
	H ₂ Optics® Technology Electron		▼ 130014 & 130114	Gooseneck Faucets - Hardwire	
	Washdown Urinal Concealed			& Battery - Wall Mount	C23, C140
	Hardwire	C32, C122	♂ 3000T4 & 3001T4	H ₂ Optics® Sensing Technology	, -
			-	Low Profile Institutional	
					004

	MODEL/ SERIES #	DESCRIPTION	PAGE NUMBER
ا الم	ELECTRONICS (continued of the sensor fauce		
\bigcirc	DEMD-101LF to		
	DEMD-312LF		
		Deck Mount Faucets with/less	017 010
đ	DEMD-320LF to	Above Deck Mount Mixing	.617-618
V		. Solar Lavatory Faucets	C17
d	DEMD-402LF to	. Soldi Lavatory Faucets	.017
V	DEMD-404LF	Infrared Sensing Single Hole	
		Wall Mount Faucets	C19
\$	DEMD-611LF		.015
٠	DEMID OTTEL	Deck Mount Faucet	.C17
	SHOWERS		
		. Push-Button Electronic Shower -	
		Hardwire	. C42, C142-C144
	861T1	. Push-Button Electronic Shower -	,
		Battery	.C142-C144
	EXPOSED FLUSH VALVE		
	81T***BTA	•	
		Flush Valves	. C28-C29. C115-C116
	81T**MMO		,
		Flush Valves with Manual	
		Mechanical Override	
	Q1T***U\\/\	. Exposed - Electronic Hardwire	C114-C116
	011 11VVA	Flush Valves	C29-C30 C116-C117
	81T*** Solar	. Exposed - Solar Electronic Hardwire	. 023 000, 0110 0111
		Flush Valves	. C29, C31, C114
	81T201-WMSHWA to		
	81T231-WMSHWA	. H ₂ Optics® Technology Electronic	
		Exposed Flush Valves with Wall Mount Sensor	C30 C117
		Wall Would Ochson	. 000, 0111
	DEFM-100	. Electronic Side Mount Flush Kit	.C28
	DEMD-86405 to		
	DEMD-86515	. Electronic Flush Valves for	
		Washdown Urinal	. C32-C33
	CONCEALED FLUSH VAI	LVES (UR)	
		. H ₂ Optics [®] Sensing Technology	
		Concealed Electronic	
		Toilet/Urinal Flush Valves	. C31, C118-C121
	1600T9	. H ₂ Optics® Sensing Technology	
		Washdown Urinal Concealed Valves -	
		Hardwire	. C32, C122
	ACCESSORIES		
	DESD-250 to		
		. Infrared Sensing Soap Dispensers	.C20
	Electronic Accessories	. Transformers, Hardwire Converters,	
		Escutcheons, Mixing Valves	
			C124, C126, C128, C130, C132-C133,
			C135-C136,
			C138-C139, C141

MODEL/ SERIES #	DESCRIPTION	PAGE Number
LABORATORY		
W62	Ball Valves	C146
W6629 & W6635	Pure Water Faucets	C147
W66 Series	Single Water Faucets	C148
W67 Series	Two Handle Mixing Faucets	C149-C150
Spout Outlets and Inser	ts	C152

Hardwire & Battery





Quick Pick Product Numerical Price List

Model Number	Case Qty.	Page Number	List Price	Universal Product Code
21C122	6		198.80	055870252066
21C132	6		188.25	055870252707
21C133	6		186.75	055870267039
				055870317017
21C134	6		208.50	055870252721
21C142	6		184.15	055870251274
				055870267046
				055870252745
				055870267060
				055870267077
				055870267084
				055870268371
				055870267091
				055870267107
				055870253735
				055870267114
				055870253391
				055870253742
				055870253537
				055870253810
				055870253551
				055870253827
				055870267121
				055870253575
				055870267138
				055870267145
				055870267152
				055870255616
				055870255814
				055870267176
				055870255630
				055870255821
				055870267183
				055870255654
				055870255739
				055870267190
				055870255753
				055870267206
				055870255777
				055870254398
				055870254565
				055870267213
				055870254572
				055870254435
				055870254459
2704832	J		225.45	055870251281 055870255166
				055870255166
				055870254947
				055870254961
				055870254985
				055870254985
2002303	I		202 90	055870267244
				055870373587
2004/0216	າ		233.03	055870373600
				055870373624
201 4302L1	Λ		233.63 196.20	778062593609
				778062401058
				778062627700
				055870355828
331200-100	20		/ 3.05 //3 75	778062407807
				778062407807
				055870355811
				778062412054
				778062412034
				055870340978
				055870420021
81T201-40-WW3HV	3	630 С28	507.33 596.70	055870348141
81T201BTA	3		536.70 596.70	055870361539
ייייי ות-אומוערטו ייייי	J	020	550.70	0000/0001003

Model Number	Case Qty.	Page Number	List Price	Universal Product Code
81T201BTA-MM0	3	C28	596.70	055870431904
81T201BTA-MM0-BL.	3	C28	716.00	055870458383
81T201HWA	3	C29	648.55	055870349353
81T201SP-42-MM0	1	C29	721.35	055870453210
81T201SP-48-MM0	1	C29	721.35	055870453227
81T201SP-DF-MM0	1	C29	721.35	055870453234
81T201SP-MM0	1	C29	721.35	055870453241
81T201-WMSHWA	1	C30	807.35	055870419995
81T231-05-WMSHWA]	C30	807.35	0558/0420090
81T231-19-WMSHWA	1	C30	807.35	0558/0420151
81T231BTA	3	C29	596./0	0558/0349438
81T231BTA-19	3	C29	596./0	0558/036160/
81T231BTA-MM0	3	C29	596./0	0558/0431928
81T231BTA-MM0-BL.	3		/ 16.00	0558/0459021
81T231HWA	3	C30	648.55	0558/0349469
81T231HWA-19 81T231SP-05-MM0	3		648.55	0558/0363816
8112315P-U5-WWU	l	631	/ 21.35	
81T231SP-19-MMO 81T231SP-MMO	l	631	/ 21.35	
8112315P-MINIO 81T231-WMSHWA	l	631	/21.35	
811231-WMSHWA	l	630	807.35	
861505	1	633	1/5.85	//80b234150/
86T1153				
87T104	b		159.60	
87T105 87T110	b		1/0./5	
8/1110	b		195.90	
87T111 87T151	b		207./0	
8/1151 100LF-HDF	12		48.40	
101LF-HDF	b		161.30	
101LF-HDF	b		162.80	
400LF-HDF501LF-HDF	b		196.55	
501LF-HDF501LF-HGMHDF	b		159.10	
501LF-HGMHDF	b	67	161./5	034449643948
511LF-HDF	b	67	101./0	034449683403
511LF-HDF 511LF-HGMHDF	b	67	174.20	
515LF-HDF	0	67	100.20	034449043933
516LF-HDF	b	67	102.00	034449643979
516LF-HGMHDF	0	67	106 50	024449043900
520LF-HDF	0	67	196.00	004443040300
520LF-HGMHDF	0		190.90	034443043324
520LF-TGMHDF	0 6		190 90	034443044000
523LF-HDF	0 6		121 05	034443003412
523LF-HGMHDF	6		18/175	034443043331
523LF-TGMHDF	6		18/175	03///9685/29
534LF-GPM-PP	3		168 60	03///9855556
				034449844468
534LF-MPU-PP				
534LF-PP	3	C6	163 60	034449844451
559LF-BLGPM-PP	3	C6	235 00	034449929936
559LF-GPM-PP	3	C6	173 55	034449805230
559LF-HGM-PP	3		173.55	034449805223
559LF-MPU-PP	3		188.80	034449855532
559LF-PP	3		168.45	034449747233
559LF-SSPP	3		235.85	034449747240
567LF-BLGPM-PP	3		250.00	034449929943
567LF-GPM-PP	3		185.95	034449855525
567LF-HGM-PP	3		185.95	034449855518
567LF-MPU-PP				
567LF-PP	3		179.70	034449747707
567LF-SSPP	3		251.60	034449747714
570LF-06ELH	6	C12	185.95	034449694803
570LF-WFHDF	6	C12	184.70	034449694780
573LF-HGM-PP	3		174.20	034449844444
573LF-MPU-PP	3		188.90	034449855488
573LF-PP	3		169.15	034449844437
581LF-BLGPM-PP	3		245.00	034449929950
581LF-GPM-PP	3		179.90	034449855471
581LF-HGM-PP	3		179.90	034449844420
581LF-MPU-PP	3		194.35	034449855464
581LF-PP	3		174.65	034449844413

Model Number	Case Qty.	Page Number		Universal Product Code
590LF-HGMHDF	6		507.40	0558703877
590LF-LGHGMHDF				
590-PALGHDF	3		499.45	0558704590
590-PALGHDF-HW				
590-PALGHDF-PI	3		499.45	0558704590
590T0120	3	C23	620.40	0558703144
590T1120	3		620.40	0558703146
590TPA0120	3	C15	603.90	0558704643
590TPA0128TR				
590TPA0158TR	3		312.70	0558704644
590TPA1120	3	C15	642 90	0558704644
590TPA1190	3	C15	642 90	0558704644
590TPA2120-PI				
591LF-HGMHDF				
591LF-LGHGMHDF				
591-PALGHDF				
591-PALGHDF-HW				
591-PALGHDF-PI	າ		402.30	0550704551
591T0250	3		321.30	0550704391
591T1250				
591TPA0250				
591TPA0290				
591TPA1250				
591TPA2220-PI				
592-PALGHDF				
592-PALGHDF-HW	3	C16	509.50	0558704591
592-PALGHDF-PI				
620TPA3320				
620TPA3320-BL	3		670.10	0558704646
620TPA3320-SS	3		670.10	0558704646
620TPA3358TR	3		312.65	0558704647
621TPA3350				
621TPA3350-BL				
621TPA3350-SS				
630TPA320				
630TPA320-SS				
630TPA358TR				
631TPA320				
631TPA320-SS				
632TPA320-PI				
701LF-HDF				
710LF-HDF				
711LF-HDF				
860T167				
860T178				
1500T3320	1		/ 10.15	
1500T4670				
1501T3320				
1501T4670				
1600T6102ARI-42				
1600T6102ATR-42				
1600T6103ARI				
1600T6103ARI-48				
1600T6103ATR				
1600T6103ATR-48				
1600T9001RI	1	C32	420.60	0558702959
1600T9001TR	3		420.60	0558702959
2171LF-WBHHDF	6	C4	204.45	0344496483
2507LF-HDF				
2517LF-HDF				
2529LF-HDF				
2529LF-HDM				
2529LF-LGHDF				
2529LF-LGHGMHDF				
3000T4128ARI				
3000T4128ATR				
3000T4328ARI				
3000T4328ATR				
3549LF-WFHDF				
	•		010 05	0344497029

Model Number	Case Qty.	Page Number	List Price	Universal Product Code
3579LF-WFHDF	6	C11	349.05	034449702966
3579LF-WFLGHDF	6	C11	326.55	034449702973
				034449667579
				034449667067
				034449906838
40124-PS			42.20	034449667586
				034449667074
				034449667081
				034449667098
				034449667609
				034449667104
				034449667111
				034449906845
				034449667135
				034449667159
41136-SS	3•	C53	33.90	034449667166
41142-SS	3•	C53	37.20	034449667173
				034449906852
				034449667197
				034449667203
				034449714778
41612-BL	3	C54	125.25	034449894654
41612-CZ	3	C54	152.50	034449714785
				034449714792
41612-RB	3	C54	152.50	034449714808
41612-SS	3	C54	131.55	034449714815
41618	3		112.05	034449714822
				034449894685
41018-UZ	ວໍ ວ		140.05	034449714839
41010-FIN	າ ວ		162 //5	034449714853
41010-ND	3		1/10 05	034449714860
				034449714877
41624-BI	3	C54	146 80	034449894722
				034449714884
41624-PN	3		154.15	034449714891
41624-RB	3	C54	178.85	034449714907
41624-SS	3	C54	154.15	034449714914
41636	3	C54	141.40	034449714921
41636-BL	3	C54	168.35	034449894715
				034449714938
				034449714945
				034449714952
41636-SS	3		1/6./5	034449714969
				034449815789
				034449894661
4104Z-UZ	ວັ	654	200 00	034449815802
				034449815819
				034449815796
				034449715133
				034449884143
				034449715140
				034449715157
				034449715164
				034449715171
				034449884150
				034449715188
41718-RB	3	C54	162.45	034449715195
				034449715201
				034449715218
				034449884198
				034449715225
				034449715232
				034449715249
				034449715256
				034449884174
				034449715263
41/30-KB	ర	655	∠U5.U5	

DELTA COMMERCIAL TECHNICAL SERVICE 1-877-509-2680 ONLINE CATALOGS: www.deltacommercialfaucets.com (Core products ONLY) www.specselect.com (Complete Product Offering & Part Numbering System)

 ⁼ Focus Products (FP) † = Trade Exclusive Products (TE)
 Full case quantity restriction on this model - priced each. Please always order in full case.





Quick Pick Product Numerical Price List

Model Number	Case Qty.	Page Number	List Price	Universal Product Code
				034449715287
				034449815741
				034449884181
				034449815765
				034449815772
				034449815758
				034449715416
				034449636331
				034449715430
				034449715447
				034449715454
				034449886741
				034449715461
				034449715478
				034449715485
• 41824	3	C55	123.30	034449715492
• 41824-BL	3	C55	154.15	034449838344
				034449715508
• 41824-RB	3	C55	178.85	034449715515
				034449715522
				034449715539
				034449838337
				034449715546
				034449715553
				034449715560
				034449815697
				034449844383
				034449815710
				034449815734
				034449815727
				034449815703
				034449715577
				034449715584
				034449724357
				034449715591
				034449715607
				034449715614
				034449887014
• 41918-CZ	3	C55	162.45	034449715621
• 41918-PN	3	C55	140.05	034449724364
				034449715638
				034449715645
				034449715652
• 11021 02			2020	034449886949
				034449715669
				034449724371
				034449715676
				034449715683
				034449715690
				034449886963
				034449715706
				034449724388
				034449715720
				034449815659
				034449844376
				034449815673
				034449815680
				034449815666
				034449906869
42205	3	C59	40.35	034449906876
				034449667289
				034449906807
				034449667296
				034449667418
				034449667234
43224-SN	3	C58	150.05	034449667425
43424	3	C58	15/.50	034449667401

Model Number	Case Qty.	Page Number	List Price	Universal Product Code
				034449906883
				034449906890
				034449667357
				034449667654
				034449906906
				034449906913 034449667456
				034449667463
				034449667487
				034449667517
				034449906920
				034449667616
				034449906814
				03444990682
51361	3	C49	183.60	034449906753
				03444990677
				03444985584
				034449855839
				034449855822
				03444983317
51549-BL	1	C48	593.70	03444992793
				03444992794
				03444983316
				03444983315
				03444983295
				03444983294
				03444985581
51600-RB		C50	383.55	03444985580
				034449855792
				034449803199
				034449803229
51900-99	1 1	G3U C51	240.40	03444960323
				03444966929
				03444966930
52002-DS 52003-DS	1	C51	266.85	03444966932
52003-UF	1	C51	245 90	03444966933
				03444989988
				03444989989
52171-CZ	6	C47	413.45	03444989990
52171-SS	6	C47	385.90	03444989786
52175	6	C47	275.65	03444989780
				03444989805
				034449897970
				03444989778
52634-15-BG	10	C45	46.05	034449674410
52634-18-PK	6	C45	46.05	03444985737
52634-SS18-PK	6	C45	69.55	03444985736
52638-15-PK	6	C44	113.95	03444976236
52638-18-PK	6	C44	113.95	03444985729
52638-BL15-PK	6	C44	177.90	03444983811
52638-BL18-PK	6	C44	1//.90	03444985724
52638-CZ15-PK	6	C44	190.55	034449762380
52638-UZ18-PK	b		190.55	03444985728
32638-PN13-PN	b		1//.90	034449762403 03444985727
32030-FN10-FN 53630 DD15 DK	0		100 55	03444965727
32030-ND13-FN 52620 DD10 DK	0 6		100.55	03444976242
52638-RD16-1 K 52638-SS15-PK	6		130.33 177 QN	03444976244
52638-SS13-PK 52638-SS18-PK	6	C44	177.90	03444985725
52653-PK	6	C46	29 50	034449669504
52667-15-RG	10		62 75	034449674430
52672-15-BG	10		36 35	03444967445
52672-18-PK	6.	C46	36.35	03444985719
52672-WH18-PK	6	C46	32.25	03444985718
52684	3		179.10	034449762465
52684-BL	3		274.95	034449838092
52684-CZ	3	C44	306.85	034449838092 034449762472
FOCOA DN	2	C11	27/1 95	034449762489
52684-PIN	J	644	41 7.30	034449762496

Model Number	Case Qty.	Page Number	List Price	Universal Product Code
				034449762502
				034449736992
				034449838085
				034449737012
				034449737005
				034449737029
				034449674485
				034449857178
				034449927512
				034449927505
				034449927536
				034449927529
				034449857151
				034449857147
				034449668965
				034449670128
				034449670128
				034449906760
				034449918350
				034449916330
				034449906791
				034449857062
				034449927857
				034449927840
				034449927871
				034449927864
				034449857055
				034449857048
				034449857031
				034449674515
				034449857024
				034449674522
				034449857017
				034449674539
				034449857000
				034449674546
				034449674553
				034449856997
				055870260177
				055870259928
				055870312005
				055870313026
				055870313033
060919A	1		70.90	055870313002
				055870331488
060967A	1		275.05	055870324831
				055870326446
061047A	1	C27	61.75	055870342736
061159A	1	C21	74.00	055870380417
061160A	1	C21	95.05	055870380424
061269A	1		74.50	055870411807
061269BL	1		89.45	055870443259
061269SS	1		89.45	055870411814
				055870411821
061305A	1		88.90	055870429277
				055870429284
063266A	1	C26	48.00	055870460027
063268A	1	C26	61.75	055870460041
				055870460058
				055870460065
				055870460072
				055870460126
				055870321069
				055870393585
				055870399242
				055870393592
				055870399259
				055870411982
DEMD-201LF	1	C18	726.20	055870393608
				I

Model Number	Case Qty.	Number		
DEMD-201LF-NS	6	C18	853.30	055870399266
				055870393615
DEMD-211LF-NS	6	C18	903.10	055870399280
DEMD-212LF	1	C18	768.55	055870411999
				055870393622
				055870399297
DEMD-311LF	6	C18	714.15	055870393639
DEMD-311LF-NS	6	C18	839.05	055870399303
				055870412002
				055870437340
				055870437357
DEMD-402LF	6	C19	887.40	055870393646
				055870399334
DEMD-404LF	1	C19	848.40	055870393653
DEMD-404LF-NS	6	C19	996.95	055870399365
DEMD-611-10LF	4	C17	870.60	055870432222
DEMD-611LF	4	C17	870.60	055870411616
				055870372634
DEMD-86415	6	C33	513.05	055870372641
				055870372658
DEMD-86515	6	C22	542.25	055870372665
DESD-250	1	C20	318.95	055870312982
DESD-550	3	C20	489.55	055870312999
DESD-750	6	C20	535.50	055870454354
DESD-751	6	C20	535.50	055870454361
DESD-751-BL	6	C20	661.00	055870468757
ELAVT0001ARI	1	C25	481.45	055870414280
				055870414297
• H795	6	C36	58.85	034449683586
• H795SS	6	C36	77.20	034449683593
• H797	6	C36	50.05	034449683630
• H797SS	6	C36	70.05	034449683647
R2570-MIXLF	1	C27	188.30	055870392342
R2910-MIXLF	24	C27	73.50	034449721783
R3070-MIXLF	1	C27	152.60	055870381124
R10000-IP	12•	C34	62.40	034449518000
R10000-IPWS	12	C34	87.50	034449518017
				034449645089
				034449645096
				034449517980
				034449517997
				034449518024
				034449518048
				034449629874
				034449544191
				034449518031
				034449629294
				034449629881
				055870326828
				055870289093
				034449245937
				034449417365
				034449434539
				034449441872
				034449447508
				034449575881
				034449593397
				034449593380
KY54/52	b		68.40	034449593410
				034449593427
				034449684514
				034449799676
KY/UI/IBL	l		191.85	034449840361
				034449844987
KY/U1/10Z	l		205.50	034449684521
				034449954310
				034449684538
				034449837309
				034449684545
W 101/1-9919	10	647	131.03	054443/33/13
•				

 ⁼ Focus Products (FP) † = Trade Exclusive Products (TE)
 Full case quantity restriction on this model - priced each.

 ⁼ Focus Products (FP) † = Trade Exclusive Products (TE)
 Full case quantity restriction on this model - priced each. Please always order in full case.

Quick Pick Product Numerical Price List



Model Number	Case Qty.	Page Number	List Price	Universal Product Code
RP70175	1	C47	129.00	03444966267
RP70175-15	18	C47	129.00	03444979972
RP70175BL	1	C47	180.80	03444984035
RP70175-BL15	18	C47	180.80	03444984497
RP70175CZ				
RP70175RB	1	C47	193.30	03444967995
RP70175SS				
RP70175-SS15	18	C47	180.80	03444979975
RP71072				
RP93273	6	C52	131.05	03444987145
RP93273BL				
RP93273SS	6	C52	158.35	03444986207
RPW124HDF	1	C43	199.45	03444943405
RPW136HDF	1	C43	219.85	03444943407
RPW324HDF				
RPW324HDF-1.5	1	C43	254.35	05587033824
RPW324HDF-LHD	1	C43	244.75	03444977080
RPW336HDF	1	C43	280.00	03444943411
T13H132	6	C40	118.00	05587034522
T13H152				
T13H153				
T13H163	6	C41	262.25	05587028581
T13H232	6	C40	140.35	05587034529
T13H253				
T13H333	1	C41	486.30	05587028584
T17TH125				
T17TH155				
T13090				
T13091	12	C38	88 90	03444953359
T13290				
T13291	12	L30	107.30	N3///Q5335/
T13291-LHD				
T13291-SLHD	12	L30	an 55	 10.11901/1/20
T13391				
T13420-SHCCER	12		225 50	
T13490				
T13490 T13491	12 12		122.00	034449033333
T13491-LHD				
T13491-SLHD	12		116.05	03444337.200 011111111
T13691				
T13691-SOS-15	12		164.00	03367032700 0347107136
T14238-LHD				
T14238-SSLHD T14238-SSLHD	າ	637	102 15	03444373004
т 14256-55LпD T14251-LHD				
T14251-LHD T14259-BLLHD	0		102.00	03444973000
T14259-LHD T14259-SSLHD	0		138.45	03444971448
T14259-SSLHD T14261-LHD				
114261-LHU	b		160.90	
T14261-SSLHD	0	636	223.23	03444973332
T14267-LHD	b		186.10	
T14267-SSLHD	b		285.30	
T14297-LHP-LHD	b		158.20	
T14297-SSLHP-LHD.	b		219.65	
T14438-LHD	b		159.90	
T14438-SSLHD	3		221.10	
Γ14451-LHD	3		215./0	034449/3056
Γ14453-LHD	3	C35	285.00	034449/3062
T14459-BLLHD	6		227.30	0344498386
Γ14459-LHD	6	C37	162.35	03444971450
T14459-SSLHD	6	C37	227.30	03444972680
T14461-LHD				
T14461-SSLHD	6	C36	259.40	03444972682
T14467-LHD	6	C36	223.40	03444972519
T14467-SSLHD	6	C36	337.50	03444972520
T14497-LHP-LHD	6	C36	198.05	03444973069
T14497-SSLHP-LHD.	6	C36	274.95	03444973055
U1011-PK	6	C52	75.15	03444967087
U1075-PB-PK	6	C52	61.35	03444967090
U1075-PK	6	C52	39.20	03444967091
	_			03444967171

t Code	Product		Case Qty.	
9671729	0344496	29.50	 6	U6300-WH
19855457	0344498	44.90	 6	U6500
1992789	0344499	54.50	 6	U6500-BL
992790	0344499	58.20	 6	U6500-CZ
19855440	0344498	58.20	 6	U6500-RB
19855433	0344498	54.50	 6	U6500-SS
196717 198554 199278 199279	0344496 0344499 0344499		 6	U6300-WH U6500 U6500-BL U6500-CZ U6500-RB

 ⁼ Focus Products (F) † = Trade Exclusive Products (TE)
 Full case quantity restriction on this model - priced each.
 Please always order in full case.





Quick Pick Products

The Delta® brand understands the importance of completing projects in a timely manner and we would like to guide you with selecting the right product in the most user-friendly and efficient way. We offer a comprehensive line of commercial-grade faucets and accessories for hospitality, healthcare, and general use. The Quick Pick section will provide you with a list of some of our most popular and newest models, along with information on pricing, finish options and product features.

Please always order in full case. Delta Commercial Technical Service 1-877-509-2680. Online Catalogs: www.deltacommercialfaucets.com (Core products ONLY). www.specselect.com (Complete Product Offering & Part Numbering System)

Commercial Single Handle Kitchen Faucet

1.5 gpm

Flow

1.5 gpm

100LF-HDF

101LF-HDF

4001 F-HDF

26C3132

26C3142



• 3-hole 8" installation

- •8 11/16" long, 8 1/2" high
- Vandal resistant handle and aerator

Price Finish

Price Finish

Price Finish

Chrome

Finish

269.15 Chrome

Chrome

196.55

273.20

Chrome

162.80

Chrome

161.30

- Red/blue indicator
- 2 1/2" max. deck thickness
- Straight, staggered supply tubes
- 3/8" O.D. inlets with 3/8" fittings, includes 1/2" adapters
- DIAMOND[™] Valve



Commercial Single Handle Kitchen Faucet



- 1-hole installation •8 11/16" long, 8" high
- Vandal resistant handle and aerator
- · Red/blue indicator
- 2 1/2" max. deck thickness
- Straight, staggered supply tubes
- 3/8" O.D. inlets with 3/8" fittings, includes 1/2" adapters
- DIAMOND[™] Valve



Single Handle Kitchen Faucet with Spray

Flow

1.5 gpm

1.5 gpm

1.5 gpm



- 4-hole 8" installation
 - •8 11/16" long, 8 1/2" high
 - · Vandal resistant handle and aerator
 - · Red/blue indicator
 - 2 1/2" max. deck thickness
 - Straight, staggered supply tubes

 - 3/8" O.D. inlets with 3/8" fittings, includes 1/2" adapters
 - DIAMOND[™] Valve



Commercial Two Handle Kitchen Faucet



- 3-hole 8" installation
- 8" long, 6 3/5" high
- Spout swings 360°
- Cast body
- 5 1/3" from deck to aerator
- Vandal resistant hooded blade handles
- Red/blue indicators
- 26C3132 Vandal resistant aerator
- 26C3142 Standard aerator
- 1/2" IPS shanks • 1 3/4" max. deck thickness
- CER-TECK[®] cartridges



Commercial Two Handle Kitchen Faucet



Model Price Finish 271.70 26C3133 1.5 gpm Chrome 267.60 26C3143 1.5 gpm Chrome



- 3-hole 8" installation • 8" long, 6 3/5" high Spout swings 360°
- Cast body
- 5 1/3" from deck to aerator
- Vandal resistant lever handles Red/blue indicators
- 26C3133 Vandal resistant aerator
- 26C3143 Standard aerator
- 1/2" IPS shanks
- 1 3/4" max. deck thickness
- CER-TECK[®] cartridges



Commercial Two Handle Kitchen Faucet



- Price Finish 26C3124 303.95 Chrome 1.5 gpm 26C3134 293.45 Chrome 1.5 gpm 26C3144 1.5 gpm 289.35 Chrome
- 3-hole 8" installation • 8" long, 6 3/5" high
- Spout swings 360°
- Cast body
- 5 1/3" from deck to aerator
- Vandal resistant sanitary hood blade handles
- Red/blue indicators
- 26C3124 Vandal resistant Agion® antimicrobial laminar outlet
- 26C3134 Vandal resistant aerator
- 26C3144 Standard aerator
- 1/2" IPS shanks
- 1 3/4" max. deck thickness
- CER-TECK[®] cartridges

⊘DELTA.

Commercial

Model

26C3933

26C3943

Commercial

26C3924

26C3934

26C3944

Commercial

Model

27C2933

Two Handle Kitchen Faucet

Two Handle Kitchen Faucet

1.5 gpm

1.5 gpm

1.5 gpm

1.5 gpm

1.5 gpm

1.5 gpm



Price Finish

277.15 Chrome

273.10 Chrome

Price Finish

Price Finish

Chrome

Chrome

Chrome

Finish

Chrome

Chrome

272.90

Chrome

Chrome

Chrome

309.40

298.90

294.80



- 3-hole 8" installation
- 6" long, 11 3/5" high
- Rigid / swivel gooseneck spout Cast body
- Vandal resistant lever handles Red/blue indicators
- 26C3933 Vandal resistant aerator
- 26C3943 Standard aerator
- 1/2" IPS shanks
- 1 3/4" max. deck thickness
- CER-TECK° cartridges
- 3-hole 8" installation • 6" long, 11 3/5" high
- · Rigid / swivel gooseneck spout
- Cast body
- · Vandal resistant sanitary hood blade handles
- Red/blue indicators
- 26C3924 Vandal resistant Agion* antimicrobial laminar
- 26C3934 Vandal resistant aerator
- 26C3944 Standard aerator
- 1/2" IPS shanks • 1 3/4" max. deck thickness
- CER-TECK° cartridges
- 3-hole 8" installation • 6" long, 11 4/5" high
- · Rigid / swivel gooseneck spout · Below deck mount
- Vandal resistant lever handles Red/blue indicators
- 27C2933 Vandal resistant aerator
- 1" max. deck thickness
- CER-TECK° cartridges



Commercial Two Handle Kitchen Faucet

Two Handle Kitchen Faucet



Price Finish 274.40 1.5 gpm 1.5 gpm 270.35



- 3-hole 8" installation
- 6" long, 11 4/5" high · Rigid / swivel gooseneck spout
- · Below deck mount • Vandal resistant hooded blade handles
- Red/blue indicators
- 27C2932 Vandal resistant aerator • 27C2942 - Standard aerator
- 1" max. deck thickness
- CER-TECK° cartridges




Commercial Two Handle Kitchen Faucet



	Flow	Price
ļ	1.5 gpm	305.15
ļ	1.5 gpm	290.55



- 3-hole 8" installation • 6" long, 11 4/5" high spout
- Rigid / swivel gooseneck spout
- · Below deck mount · Vandal resistant sanitary hood blade handles
- Red/blue indicators • 27C2924 - Vandal resistant Agion* antimicrobial laminar
- 27C2944 Standard aerator
- 1" max. deck thickness
- CER-TECK[®] cartridges





- 3-hole 8" installation • 6" long, 11 4/5" high
- · Rigid / swivel gooseneck spout
- · Below deck mount
- Vandal resistant sanitary hood blade handles Red/blue indicators
- Smooth spout end with laminar flow control in spout base • 1" max. deck thickness
- CER-TECK[®] cartridges



See pages CI and CII for icon definitions. ASME.A112.18.1/CSA.B125.1.

Flow

1.5 gpm

1.5 gpm

1.5 gpm

1.5 gpm

Price Finish

Chrome

410.05



Commercial Two Handle Bar Faucet

Model

Model

27C4822

27C4832

27C4842

2171LF-WBHHDF



• 2-hole 4" installation • 4 5/32" long. 11" high

- Gooseneck spout swings 360°
- · Vandal resistant wrist blade handles

⊘DELTA.

- Red/blue indicators
- Vandal resistant aerator
- 1/2" IPS shanks
- 1" max. deck thickness
- 1/4 turn stops
- Brass stems / stainless steel plate



Commercial Two Handle Bar Faucet



Price Finish 235.95 Chrome

Chrome

Chrome

225.45

221.35

Price Finish

204.45 Chrome

Ġ		

5	•
	•

- 2-hole 4" installation 4 1/2" long, 11 3/4" high
- Rigid / swivel gooseneck spout
- Cast body
- Vandal resistant hooded blade handles
- Red/blue indicators
- 27C4822 Vandal resistant Agion* antimicrobial laminar
- 27C4832 Vandal resistant aerator
- 27C4842 Standard aerator
- 1/2" IPS shanks
- 1 3/4" max. deck thickness
- CER-TECK® cartridges



Commercial Two Handle Bar Faucet





Model Price Finish Flow 27C4943 219.90 1.5 gpm Chrome

1.5 gpm

1.5 gpm

1.5 gpm



- 2-hole 4" installation
- 6" long, 11 3/5" high
- · Rigid / swivel gooseneck spout
- Cast body
- · Vandal resistant lever handles
- Red/blue indicators
- Standard aerator
- 1/2" IPS shanks
- 1 3/4" max. deck thickness
- CER-TECK® cartridges

• 2-hole 4" installation

• 6" long, 11 3/5" high



Commercial Two Handle Bar Faucet

27C4924

27C4934

27C4944

Model

Model

25C3877

25C3837

25C3847





- Vandal resistant sanitary hood blade handles
- Red/blue indicators
- 27C4924 Vandal resistant Agion* antimicrobial laminar
- 27C4934 Vandal resistant aerator
- 27C4944 Standard aerator

· Rigid / swivel gooseneck spout

- 1/2" IPS shanks
- 1 3/4" max. deck thickness
- CER-TECK® cartridges



Commercial Two Handle Bar Faucet





Price

285.05

Finish

Chrome

Price Finish

Chrome

Chrome

Chrome

256.20

245.65

241.65



- 1-hole installation • 4 1/2" long, 14" high
- Rigid / swivel gooseneck spout
- Vandal resistant ADA lever balanced handles
- Red/blue indicators
- 25C3837 Vandal resistant aerator
- 25C3847 Standard aerator
- 3/8" compression fittings
- 2" max. deck thickness
- CER-TECK° cartridges

Commercial Two Handle Bar Faucet

Flow

1.0 gpm







- 1-hole installation • 4 1/2" long, 14" high
- Rigid / swivel gooseneck spout
- Vandal resistant ADA lever balanced handles
- Red/blue indicators • Smooth spout end with laminar flow control in spout base
- 3/8" compression fittings • 2" max. deck thickness
- CER-TECK[®] cartridges

⊘DELTA.

Commercial Service Sink Faucet

Model

28C2383



- Wall installation 8" centers
- 8" long vacuum breaker spout Rigid spout with top / bottom brace
- Cast body
- Vandal resistant lever handles
- Red/blue indicators
- Hose thread outlet
- Vacuum breaker Integral check stops
- Not for potable water
- CER-TECK® cartridges



Commercial Service Sink Faucet



1.5 gpm

Price Finish 293.80 Chrome



- Wall installation 8" centers
- 11" long spout swings 360° Swing spout
- Cast body
- Vandal resistant lever handles and aerator
- Red/blue indicators · Less integral stops
- For commercial use onlyCER-TECK° cartridges



Commercial Service Sink Faucet

Model Flow 28T9 186.20

- 9 1/2" long vacuum breaker spout
- Rigid spout with top brace

• Wall installation - 8" centers

- Cast body
- Cross handles • Red/blue indicators
- Hose thread outlet
- Vacuum breaker
- Integral stops
- Not for potable water Heavy duty cartridges



Commercial Service Sink Faucet

Model 28P4902LF

Model

28P4402LF

28P4202LF

Model


55C1513

Flow 1.5 gpm

Price Finish 235.85 Chrome

Price Finish

Rough Chrome



- 8" gooseneck spout swings 360°
- Gooseneck swing spout Cast body
- Supplied with adjustable centers 6.87" to 9.25" Vandal resistant hooded blade handles and aerator
- Red/blue indicators
- Less integral stops
- Control mechanism is 1/4 turn cylinder with brass stem, stainless steel plate and non-metallic seats



Commercial Service Sink Faucet

Flow

Price Finish 1.5 gpm 235.85



• Wall installation - 8" centers • 8" long spout swings 360°

- Swing spout
- Cast body
- Supplied with adjustable centers 6.87" to 9.25"
- Vandal resistant hooded blade handles and aerator
- Red/blue indicators
- · Less integral stops
- Control mechanism is 1/4 turn cylinder with brass stem, stainless steel plate and non-metallic seats



Commercial Service Sink Faucet

1.05 gpm

1.5 gpm

Price 235.85 Chrome

Chrome



• Wall installation - 8" centers • 9 1/2" long spout swings 360° Swing spout

Vandal resistant hooded blade handles and aerator

Cast body

- Red/blue indicators Less integral stops
- Control mechanism is 1/4 turn cylinder with brass stem, stainless steel plate and non-metallic seats

Supplied with adjustable centers - 6.87" to 9.25"



Pre-Rinse Wall Mount Faucet



Price Finish



• Wall installation - 8" centers Cast body

- Vandal resistant lever handles
- Red/blue indicators
- Stainless steel hose shield
- For commercial use only
- CER-TECK[®] cartridges

See pages CI and CII for icon definitions. ASME A112.18.1/CSA B125.1.



Commercial

717.00

Chrome

High pressure hose

Integral check stops

• 12" wall bracket - thin wall kit

. Insulated spray head with hook



534LF-PP

Model

559LF-PP

559LF-GPM-PP

559LF-HGM-PP

559LF-MPU-PP

559LF-SSPP

567LF-PP

567LF-GPM-PP

567LF-HGM-PP

567LF-MPU-PP

567LF-SSPP

567LF-BLGPM-PP

559LF-BLGPM-PP

534LF-GPM-PP

534LF-HGM-PP

534LF-MPU-PP



⊘DELTA.



Single Handle Project-Pack Bathroom Faucet

1.2 gpm

1.0 gpm

0.5 gpm

1.2 gpm

534LF-HGM-PP is not WaterSense® Labeled

163.60

168.60

168.60

183.40

Price

168.45

173.55

173.55

188.80

235.00

235.85

Price

179.70

185.95

185.95

200 05

250.00

251.60

Chrome

Chrome

Chrome

Chrome

Finish

Chrome

Chrome

Chrome

Chrome

Chrome

Chrome

Chrome

Chrome

Matte Black

Brilliance® Stainless

Matte Black

Brilliance® Stainless



•	OF	

- 1 or 3-hole 4" installation: for 3-hole installation, order RP47973 escutcheon • 5 1/4" long, 5 9/16" high
- Rigid spout
- Red/blue indicator
- 50/50 pop-up with angled lift-rod
- MPU = metal pop-up with angled lift-rod
- 3/8" compression fittings
- 2 1/2" max. deck thickness
- 20" flex supply lines included
- Order RP79046 for 1.0 gpm water-efficient aerator or
- RP79058 for 0.5 gpm aerator
- Euro-Motion ceramic valve with temperature limit setting



Single Handle Project-Pack Bathroom Faucet

1.2 gpm

1.0 gpm

0.5 gpm

1.2 gpm

1.0 gpm



- 1 or 3-hole 4" installation; for 3-hole installation, order RP78359 escutcheon • 3 1/2" long, 5 1/8" high
- · Rigid spout
- Red/blue indicator
- 50/50 pop-up with angled lift-rod
- MPU = metal pop-up with angled lift-rod
- 559LF-BLGPM-PP metal pop-up
- 3/8" compression fittings
- 2 1/4" max. deck thickness
- 14 1/2" flex supply lines included
- Order RP79322 for 1.0 gpm or RP79323 for 0.5 gpm waterefficient aerator
- Euro-Motion ceramic valve with temperature limit setting



Single Handle Project-Pack Bathroom Faucet

1.2 gpm

1.0 gpm

0.5 gpm

1.2 gpm

1.0 gpm

1.2 gpm

567LF-HGM-PP is not WaterSense® Labeled

559LF-HGM-PP is not WaterSense® Labeled






- Red/blue indicator • 50/50 pop-up with angled lift-rod
 - MPU = metal pop-up with angled lift-rod
 - 567LF-BLGPM-PP metal pop-up with angled lift-rod
 - 3/8" compression fittings
 - 2 1/4" max. deck thickness
 - 14 1/2" flex supply lines included
 - Order RP79322 for 1.0 gpm or RP79323 for 0.5 gpm waterefficient aerator
 - Euro-Motion ceramic valve with temperature limit setting



Single Handle Project-Pack Bathroom Faucet



573LF-HGM-PP is not WaterSense® Labeled



- 1 or 3-hole 4" installation; for 3-hole installation, order RP47973 escutcheon
- 4 1/4" long, 7 5/16" high
- Rigid spout
- Red/blue indicator
- 50/50 pop-up with angled lift-rod
- MPU = metal pop-up with angled lift-rod
- 3/8" compression fittings
- 2 1/4" max. deck thickness
- 19" flex supply lines included
- Order RP79046 for 1.0 gpm water-efficient aerator or RP79058 for 0.5 gpm aerator
- Euro-Motion ceramic valve



Single Handle Project-Pack Bathroom Faucet



- Finish 581LF-PP 174.65 1.2 gpm Chrome 581LF-GPM-PP 1.0 gpm 179.90 Chrome 581LF-HGM-PP 179.90 0.5 gpm Chrome 581LF-MPU-PP 194 35 Chrome 1.2 gpm 581LF-BLGPM-PP 1.0 gpm 245.00 Matte Black
- 581LF-HGM-PP is not WaterSense® Labeled

- 1 or 3-hole 4" installation; for 3-hole installation, order RP76702 escutcheon
 - 5 5/8" long, 6 7/16" high
- Rigid spout
- Red/blue indicator
- 50/50 pop-up with angled lift-rod
- MPU = metal pop-up with angled lift-rod
- 581LF-BLGPM-PP metal pop-up with angled lift-rod
- 3/8" compression fittings
- 2 1/2" max. deck thickness
- 19" flex supply lines included
- Order RP91238 for 1.0 gpm water-efficient aerator or
- RP91239 for 0.5 gpm aerator
- Euro-Motion ceramic valve

⊘DELTA

Single Handle Centerset Bathroom Faucet



- Price Finish Model 501LF-HDF 159.10 Chrome 1.2 gpm 501LF-HGMHDF 161.75 Chrome 0.5 gpm 501LF-TGMHDF 0.35 gpm 161.75 Chrome
- 501LF-HGMHDF and 501LF-TGMHDF are not WaterSense® Labeled
- 2-hole 4" installation **③** ♦ 5
 - 5" long, 4 7/8" high
 - Rigid spout
 - Solid brass fabricated body
 - Vandal resistant lever handle and aerator
 - Red/blue indicators
 - Adjustable handle limit stop
 - Less pop-up
 - . No lift rod hole
 - 2" max. deck thickness
 - 3/8" OD straight, copper supply tubes with 1/2" IPS fittings
 - DIAMOND[™] Valve



Single Handle Centerset Bathroom Faucet

Model	Flow	Price	Finish
520LF-HDF	1.2 gpm	186.95	Chrome
520LF-HGMHDF	0.5 gpm	189.80	Chrome
520LF-TGMHDF	0.35 gpm	189.80	Chrome

520LF-HGMHDF and 520LF-TGMHDF are not WaterSense® Labeled

- 3-hole 4" installation
- 5" long, 4 7/8" high
- Rigid spout
- Solid brass fabricated body
- Vandal resistant lever handle and aerator
- Red/blue indicators
- Adjustable handle limit stop
- Metal pop-up with angled lift-rod • 2" max. deck thickness
- 3/8" OD straight, copper supply tubes with 1/2" IPS fittings DIAMOND[™] Valve



Single Handle Centerset Bathroom Faucet

Model	Flow	Price	Finish
523LF-HDF	1.2 gpm	181.95	Chrom
523LF-HGMHDF	0.5 gpm	184.75	Chrom
523LF-TGMHDF	0.35 gpm	184.75	Chrom

523LF-HGMHDF and 523LF-TGMHDF are not WaterSense® Labeled

- 2-hole 4" installation
- 5" long, 4 7/8" high Rigid spout
- Solid brass fabricated body
- Vandal resistant lever handle and aerator
- Red/blue indicators Adjustable handle limit stop
- Metal grid strainer
- No lift rod hole
- 2" max. deck thickness • 3/8" OD straight, copper supply tubes with 1/2" IPS fittings
- DIAMOND[™] Valve

• 2-hole 4" installation

• 5" long, 7 3/8" high

Rigid spout



Single Handle Centerset Bathroom Faucet

Model	Flow	Price	Finish
511LF-HDF	1.2 gpm	171.75	Chrome
511LF-HGMHDF	0.5 gpm	174.30	Chrome

S)	(Ġ	
------------	----------	---	--

③ ♦ 5

◎ ♦ 5

	Flow	Price	Finish	
	1.2 gpm	171.75	Chrome	
)F	0.5 gnm	174 30	Chrome	

511LF-HGMHDF is not WaterSense® Labeled

• Red/blue indicator • Adjustable handle limit stop No lift rod hole

Solid brass fabricated body

• 2" max. deck thickness • 3/8" OD straight, copper supply tubes with 1/2" IPS fittings

· Vandal resistant elbow handle and aerator

DIAMOND™ Valve



Single Handle Centerset Bathroom Faucet



Price Finish Model Flow 515LF-HDF 1.2 gpm 199.20 Chrome

③ 🍁 🕭 • 3-hole 4" installation • 5" long, 7 3/8" high

- Rigid shout Solid brass fabricated body
- · Vandal resistant elbow handle and aerator • Red/blue indicator
- Adjustable handle limit stop
- Metal pop-up
- 2" max. deck thickness
- 3/8" OD straight, copper supply tubes with 1/2" IPS fittings
- DIAMOND™ Valve



Price Finish Model Flow 516LF-HDF 1.2 gpm 193.80 Chrome 0.5 gpm

196.50

Single Handle Centerset Bathroom Faucet

516LF-HGMHDF is not WaterSense® Labeled

516LF-HGMHDF

- **্র্ত** 🛵
- 2-hole 4" installation • 5" long, 7 3/8" high Rigid spout
 - Solid brass fabricated body
 - Vandal resistant elbow handle and aerator • Red/blue indicator
 - Adjustable handle limit stop
 - Metal grid strainer • 2" max. deck thickness
 - 3/8" OD straight, copper supply tubes with 1/2" IPS fittings
 - DIAMOND™ Valve

22C301

22C401

22C601

22C801

Price Finish

181.65 Chrome

Price Finish

Price Finish

Price Finish

Price Finish

Chrome

237.95

Chrome

201.00


Chrome

203.70

Chrome

214.90





- 5 9/10" long, 5 1/3" high
- Cast brass body
- Vandal resistant lever handle and aerator with wrench

⊘DELTA.

- Red/blue indicator
- 1 1/5" max. deck thickness
- 1/2" IPS shanks
- No lift rod hole
- Ceramic cartridge with rotational limit stop



Single Handle Centerset Bathroom Faucet

1.5 gpm

Single Handle Centerset Bathroom Faucet

1.5 gpm





- 3-hole 4" installation
- 5 9/10" long, 5 1/3" high
- Cast brass body
- Vandal resistant lever handle and aerator with wrench
- Red/blue indicator
- 1 1/5" max. deck thickness
- 1/2" IPS shanks
- Metal pop-up
- · Ceramic cartridge with rotational limit stop



Single Handle Centerset Bathroom Faucet

Flow

1.5 gpm





- 3-hole 4" installation • 5 9/10" long, 5 1/3" high
- Cast brass body
- Vandal resistant lever handle and aerator with wrench flats
- Red/blue indicator
- 1 1/5" max. deck thickness
- 1/2" IPS shanks
- Metal grid strainer
- Ceramic cartridge with rotational limit stop



Single Handle Single Hole Bathroom Faucet

1.5 gpm





- 1-hole installation
- 5 1/3" long, 5 1/3" high
- Cast brass body
- Vandal resistant lever handle and aerator with wrench
- Red/blue indicator
- 2 1/8" max. deck thickness
- 3/8" compression fittings
- No lift rod hole
- Optional 8" coverplate 061270A available
- Ceramic cartridge with rotational limit stop



Single Handle Single Hole Bathroom Faucet

1.5 gpm







- 1-hole installation • 5 1/3" long, 5 1/3" high
- Cast brass body
- Vandal resistant lever handle and aerator with wrench flats
- Red/blue indicator
- 2 1/8" max. deck thickness
- 3/8" compression fittings
- Metal pop-up
- Optional 8" coverplate 061270A available
- Ceramic cartridge with rotational limit stop

Two Handle Centerset Bathroom Faucet

Model

2529LF-HDF

2529LF-HDM



Price Finish

221.40 Chrome

Price Finish

236.10 Chrome

Price Finish

Chrome

188.10



- 2-hole 4" installation • 5 1/4" long, 3 1/4" high
- Solid brass fabricated body
- · Vandal resistant wrist blade handles & aerator Red/blue indicators
- Grid strainer
- No lift rod hole
- 1/2" IPS shanks
- 1 11/16" max. deck thickness



Two Handle Centerset Bathroom Faucet

1.2 gpm

1.2 gpm





- 3-hole 4" installation
- 5 1/4" long, 3 1/4" high Solid brass fabricated body
- Vandal resistant wrist blade handles & aerator
- Red/blue indicators
- Metal pop-up
- 1/2" IPS shanks
- 1 11/16" max. deck thickness



Two Handle Centerset Bathroom Faucet





- 2-hole 4" installation
- 5 1/4" long, 3 1/4" high
- Solid brass fabricated body · Vandal resistant wrist blade handles & aerator
- Red/blue indicators
- Less grid strainer
- No lift rod hole • 1/2" IPS shanks
- 1 11/16" max. deck thickness




Two Handle Centerset Bathroom Faucet

1.2 gpm



Price Finish 2529LF-LGHGMHDF 0.5 gpm 191.05 Chrome



- Solid brass fabricated body Vandal resistant wrist blade handles & pressure
- compensating aerator
- Red/blue indicators Less grid strainer
- No lift rod hole
- 1/2" IPS shanks
- 1 11/16" max. deck thickness



21C122

21C132

21C142

Two Handle Centerset Bathroom Faucet



Price Finish

186.75 Chrome

Chrome

182.65

Flow Price 198.80 Chrome 1.5 gpm 1.5 gpm 188.25 Chrome 184.15 1.5 gpm



- 5 1/10" long, 3 3/5" high
- Cast brass body
- Vandal resistant hooded blade handles
- Red/blue indicators • 21C122 - Vandal resistant Agion° antimicrobial laminar
- 21C132 Vandal resistant aerator
- 21C142 Standard aerator
- No lift rod hole
- 1 3/4" max. deck thickness
- CER-TECK° cartridges



Two Handle Centerset Bathroom Faucet

1.5 gpm

1.5 gpm



- 2-hole 4" installation • 5 1/10" long, 3 3/5" high
- Cast brass body
- Vandal resistant lever handles Red/blue indicators
- 21C133 Vandal resistant aerator
- 21C143 Standard aerator • No lift rod hole
- 1 3/4" max. deck thickness
- CER-TECK° cartridges

See pages CI and CII for icon definitions. ASME A112.18.1/CSA B125.1.



 No lift rod hole • CER-TECK° cartridges



- Vandal resistant hooded blade handles
- Red/blue indicators
- 23C632 Vandal resistant aerator
- 23C642 Standard aerator



⊘DELTA.

Two Handle Widespread Bathroom Faucet

Model Flow Price Finish 23C643 272.60 1.5 gpm Chrome

- Rigid / swivel gooseneck spout
- Vandal resistant lever handles
- Standard aerator
- CER-TECK® cartridges



Price Finish 1.5 gpm 308.95 Chrome 298.40 Chrome 1.5 gpm 294.30 Chrome



- 3-hole 6"-12" installation
- Vandal resistant sanitary hood blade handles
- Red/blue indicators
- 23C624 Vandal resistant Agion° antimicrobial laminar outlet
- 23C634 Vandal resistant aerator
- CER-TECK[®] cartridges
- 3-hole 6"-16" installation
- 1/4 turn handle stops
- Grid strainer
- WF = 1/2" IPS adapters
- 3-hole 6"-16" installation



Two Handle Widespread Bathroom Faucet

326.55

Price Finish

349.05



- 5 3/4" long, 11" high · Rigid gooseneck spout
 - Solid brass fabricated end valves and spout body

 - 1/4 turn handle stops
 - Less grid strainer
 - 1 1/8" max. deck thickness

 - WF = 1/2" IPS adapters

 - Brass stems / stainless steel plate



• 3-hole 6"-12" installation • 4 1/2" long, 2 3/5" high

- Rigid cast shout
- Vandal resistant hooded blade handles • Red/blue indicators
- 23C332 Vandal resistant aerator
- 23C342 Standard aerator
- No lift rod hole
- CER-TECK[®] cartridges

- · Vandal resistant lever handles and aerator
- Red/blue indicators
- CER-TECK° cartridges

21C134 21C144

Two Handle Centerset Bathroom Faucet

Two Handle Centerset Bathroom Faucet

Two Handle Centerset Bathroom Faucet

21C233

21C133-TI

3549LF-WFHDF

3549LF-WFLGHDF

1.5 gpm

1.5 gpm

1.5 gpm

1.5 gpm

Two Handle Widespread Bathroom Faucet

Two Handle Widespread Bathroom Faucet

1.2 gpm

1.2 gpm



Chrome

Chrome

Price Finish

208.50

204.40





• 2-hole 4" installation

• 21C134 - Vandal resistant aerator

• 21C144 - Standard aerator No lift rod hole • 1 3/4" max. deck thickness • CER-TECK° cartridges

Price Finish

Price Finish

Price Finish

Price Finish

Chrome

313.35

Chrome

342.30

Chrome

199.10

Chrome

248.20



ⓒ 🖊 노

③ 🍁 🔈

③ ♦ &

• 3-hole 4" installation

• 5 1/10" long, 3 3/5" high

 Cast brass body Vandal resistant lever handles and aerator

• Red/blue indicators Metal pop-up

• 1 3/4" max. deck thickness • CER-TECK° cartridges

• 2-hole 4" installation • 5 1/10" long, 3 3/5" high Cast brass body

 Vandal resistant lever handles and aerator Red/blue indicators

No lift rod hole

• 1 3/4" max. deck thickness

CER-TECK® cartridges

• 3-hole 6"-16" installation • 5 1/4" long, 3 13/16" high

· Solid brass fabricated end valves and spout body

Vandal resistant wrist blade handles & aerator

Red/blue indicators

• 1/4 turn handle stops Grid strainer

 No lift rod hole • 1 1/8" max. deck thickness

• WF = 1/2" IPS adapters

• Brass stems / stainless steel plate

• 3-hole 6"-16" installation

• 5 1/4" long, 3 13/16" high Solid brass fabricated end valves and spout body

Vandal resistant wrist blade handles & aerator

Red/blue indicators

• 1/4 turn handle stops

 Less grid strainer No lift rod hole

• 1 1/8" max. deck thickness

• WF = 1/2" IPS adapters

Brass stems / stainless steel plate

Two Handle Widespread Bathroom Faucet

Price Finish 23C332 1.5 gpm 298.70 Chrome 294.65 Chrome 1.5 gpm



Two Handle Widespread Bathroom Faucet

Model Price Finish Flow 23C333 1.5 gpm 297.25 Chrome



③ ♦ &

• 3-hole 6"-12" installation • 4 1/2" long, 2 3/5" high

Rigid cast spout

No lift rod hole

See pages CI and CII for icon definitions. ASME A112.18.1/CSA B125.1. See pages CI and CII for icon definitions. ASME A112.18.1/CSA B125.1.

23C334

Model

23C632

23C642



Two Handle Widespread Bathroom Faucet

Two Handle Widespread Bathroom Faucet

1.5 gpm

1.5 gpm





Price Finish

Chrome

Chrome

278.15


274.05




























Red/blue indicators



Two Handle Widespread Bathroom Faucet

1.2 gpm

1.2 gpm

Model


Model

3579LF-WFLGHDF

3579LF-WFHDF
















· Laminar flow outlet • 1 1/8" max. deck thickness

• Brass stems / stainless steel plate









Laminar flow outlet

710LF-HDF

Model

Model

570LF-WFHDF

570LF-06ELH

711LF-HDF



Single Handle Bar / Prep Sink Faucet

1.5 gpm

Price Finish

Price Finish

Price Finish

184.70 Chrome

Price Finish

185.95 Chrome

Chrome

282.00

Chrome

266.95



- 2-hole installation
- 5 7/32" long, 10 11/64" high rigid gooseneck spout
- Vandal resistant elbow handle and outlet
- Red/blue indicators
- · Adjustable handle limit stop
- 2 1/2" max. deck thickness
- 3/8" OD straight, staggered copper supply tubes with 3/8"
- DIAMOND[™] Valve



Single Handle Bar / Prep Sink Faucet

Flow

Flow

1.2 gpm

1.2 gpm

1.5 gpm



· 2-hole installation

- 5 7/32" long, 10 11/64" high swivel gooseneck spout
- Vandal resistant elbow handle and outlet
- Red/blue indicators
- Adjustable handle limit stop
- 2 1/2" max. deck thickness
- 3/8" OD straight, staggered copper supply tubes with 3/8"
- DIAMOND[™] Valve



Single Handle Basin Faucet



• 1-hole installation • 4" long, 4 3/4" high

- Swing spout
- · Vandal resistant lever handle and aerator
- Red/blue indicator
- Adjustable handle limit stop
- 1 9/16" max. deck thickness
- Straight, staggered supply tubes with 1/2" IPS adapters
- Order RP9633 for 6" spout
- Order RP63131 for 8" spout
- Stainless steel ball



See pages CI and CII for icon definitions. ASME A112.18.1/CSA B125.1.

Single Handle Basin Faucet



- 1-hole installation •6" long, 8 3/4" high
- Vandal resistant elbow handle and aerator
- Red/blue indicators
- Adjustable handle limit stop
- 1 9/16" max. deck thickness
- Straight, staggered supply tubes with 1/2" IPS adapters
- Order RP63131 for 8" spout
- Stainless steel ball



Commercial Single & Two Handle Metering Faucets / C13



Single Handle Metering Faucet

Model

Model

701LF-HDF





- 1-hole installation
- 4 1/4" long, 3 1/2" high Vandal resistant handle
- Metering, slow-close push style
- 1 1/8" max. deck thickness
- Vandal resistant spray outlet see (1) below
- 1/2" threaded male inlet shank



Two Handle Centerset Metering Faucet

0.5 gpm



- Price Finish 2507LF-HDF 0.5 gpm 264.80 Chrome
- 2 or 3-hole 4" installation
- 5" long, 2 3/4" high
- Vandal resistant handles • Metering, slow-close push style
- Hot/cold indicators
- No lift rod hole
- 1 3/8" max. deck thickness
- Vandal resistant spray outlet see (1) below
- 1/2" IPS shanks



Two Handle Centerset Metering Faucet




0.5 gpm

Price Finish 300.50 Chrome

Price Finish

151.70 Chrome




- Vandal resistant handles
- Metering, slow-close push style
- Hot/cold indicators
- Grid strainer
- No lift rod hole • 1 3/8" max. deck thickness
- Vandal resistant spray outlet see (1) below
- 1/2" IPS shanks



Single Handle Metering Faucet





- Cast brass body
- Vandal resistant push button
- Metering, slow-close push style
- 2 1/2" max. deck thickness
- 87T104 Single inlet
- 87T110 Mixing tee and checks
- Vandal resistant spray outlet see (1) below



Single Handle Metering Faucet



odel	Flow	Price	Finish
T105	0.5 gpm	170.75	Chrome
T111	0.5 gpm	207.70	Chrome



- Cast brass body
- Vandal resistant ADA lever handles
- Metering, slow-close lever style • 2 1/2" max. deck thickness
- 87T105 Single inlet
- 87T111 Mixing tee and checks • Vandal resistant spray outlet - See (1) below



Two Handle Centerset Metering Faucet



Price Finish 0.5 gpm 283.25

- 2-hole 4" installation Cast brass body
 - Vandal resistant ADA lever handles
 - Metering, slow-close lever style
 - Red/blue indicators
 - 2 3/8" max. deck thickness No lift rod hole
 - Vandal resistant spray outlet See (1) below



Centerset Coverplate

Flow Price Finish 87T151 48.40 Chrome

- 4" centerset cover plate Cast brass
- Two hold-down shanks For 87T series
- Vandal resistant

See pages CI and CII for icon definitions. ASME A112.18.1/CSA B125.1.

⁽¹⁾ All Delta® metering, slow-close faucets shown on this page have a 0.5 gpm (1.9L/min) flow control vandal resistant spray outlet. Each activation delivers no more than 1/4 gallon when not held open manually.

630TPA320

631TPA320

632TPA320-

630TPA320-

631TPA320-SS

Proximity Deckmount Bathroom Faucet

1.5 gpm



709.95 Brilliance® Stainless

Price Finish

312.65 Chrome

	Flow	Price	Finish
	1.5 gpm	604.80	Chrome
	1.5 gpm	643.80	Chrome
-PI	1.5 gpm	643.80	Chrome
-SS	1.5 gpm	670.95	Brilliance® Stainless

- 1-hole installation
- 5 1/3" long, 5 1/5" high
- · Cast brass spout
- Hands-free activation Entire spout is sensor
- Adjustable sensing range, auto shut-off, metering mode, and periodic rinse feature
- Anti-rotation pin
- Surface mounted control box
- Mixing valve required
- 2 1/2" max. deck thickness
- · Vandal resistant laminar outlet • Order 061305A for 4" optional cover plate
- 630TPA320 Hardwire, order AC filter (063271A) and transformer separately
- 631TPA320 Battery operated, batteries included
- 632TPA320-PI Plug-in, power supply included
- Hardwire with battery back-up order 063268A for surface mount box; transformer required




Proximity Deckmount Bathroom Faucet Trim

0.5 gpm



- 1-hole installation • 5 1/3" long, 5 1/5" high
- · Cast brass spout
- Trim only
- Requires separate order of ELAVT0008ARI for complete product
- Hands-free activation
- · Entire spout is sensor
- Adjustable sensing range, auto shut-off, metering mode
- and periodic rinse feature
- Anti-rotation pin
- 2 1/2" max. deck thickness
- Vandal resistant laminar outlet
- Order 061305A for 4" optional cover plate
- Hardwire, order AC filter (063271A) and transformer
- separately





Proximity Deckmount Bathroom Faucet





Model	Flow	Price	Finish
620TPA3320	1.5 gpm	603.90	Chrome
621TPA3350	0.5 gpm	642.90	Chrome
620TPA3320-BL	1.5 gpm	670.10	Matte Black
621TPA3350-BL	0.5 gpm	709.10	Matte Black
620TPA3320-SS	1.5 gpm	670.10	Brilliance® Stainless
621TPA3350-SS	0.5 gpm	709.10	Brilliance® Stainless

621TPA3350 models are not WaterSense® Labeled



- Gooseneck spout
- Hands-free activation
- Entire spout is sensor
- Adjustable sensing range, auto shut-off, metering mode, and periodic rinse feature
- Surface mounted control box
- Mixing valve required
- 2 1/2" max. deck thickness
- · Vandal resistant laminar outlet Order 061269A for 4" or 061270A for 8" optional cover
- Hardwire, order AC filter (063271A) and transformer
- Hardwire with battery back-up order 063269A for recessed
- mount box; transformer required



Proximity Deckmount Bathroom Faucet Trim



- Model Flow Price Finish 620TPA3358TR 312.65 Chrome 0.5 gpm
- 1-hole installation • 4 4/5" long, 9 5/8" high
 - Gooseneck spout
 - Trim only
 - Requires separate order of ELAVT0008ARI for complete product
 - Hands-free activation
 - Entire spout is sensor
 - Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature
 - 2 1/2" max. deck thickness
 - Vandal resistant laminar outlet
 - Order 061269A for 4" or 061270A for 8" optional cover
 - Hardwire, order AC filter (063271A) and transformer
 - Hardwire with battery back-up order 063269A for recessed mount box; transformer required





Proximity Deckmount Bathroom Faucet

Model	Flow	Price	Finish
590TPA0120	1.5 gpm	603.90	Chrome
590TPA1120	1.5 gpm	642.90	Chrome
590TPA1190	0.35 gpm	642.90	Chrome
590TPA2120-PI	1.5 gpm	642.90	Chrome

• 1-hole installation **ি** 🗘

• 5" long, 7 1/2" high

③ ♦ &

♦

- · Cast hi-rise spout
- Hands-free activation
- Entire spout is sensor
- Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature
- Surface mounted control box
- Recessed control box options available
- Mixing valve required
- 3" max. deck thickness
- Vandal resistant Agion* antimicrobial laminar outlet
- Order 061159A for 4" or 061160A for 8" optional cover
- 590TPA0120 Hardwire, order AC filter (063271A) and transformer separately
- 590TPA1120 Battery operated, batteries included
- 590TPA1190 Battery operated, batteries included
- 590TPA2120-PI Plug-in, power supply included
- Hardwire with battery back-up order 063268A for surface mount box; transformer required



Proximity Deckmount Bathroom Faucet Trim

Model	Flow	Price	Finish	
590TPA0128TR	1.5 gpm	312.70	Chrom	
590TPA0158TR	0.5 gpm	312.70	Chrom	

590TPA0158TR is not WaterSense® Labeled

- 1-hole installation
- 5" long. 7 1/2" high
- · Cast hi-rise spout
- Trim only
- Requires separate order of ELAVT0008ARI for complete product
- Hands-free activation
- Entire spout is sensor
- Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature
- Surface mount control box options available
- 3" max. deck thickness
- 590TPA0128TR Vandal resistant Agion® antimicrobial laminar outlet • 590TPA0158TR - Vandal resistant laminar outlet
- Order 061159A for 4" or 061160A for 8" optional cover
- Hardwire, order AC filter (063271A) and transformer separately
- Hardwire with battery back-up order 063268A for surface mount box; transformer required



Proximity Deckmount Bathroom Faucet

1	Nodel	Flow	Price	Finish
5	591TPA0250	0.5 gpm	603.90	Chrome
5	591TPA0290	0.35 gpm	603.90	Chrome
5	591TPA1250	0.5 gpm	642.90	Chrome
	01TDA2220 DI	1 5 anm	642.00	Chromo

- 3-hole 4" installation • 5" long, 5 4/5" high
- Cast body
- Hands-free activation · Entire spout is sensor
- Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature
- Surface mounted control box
- Recessed mount control box options available • 2 1/2" max. deck thickness
- Mixing valve required
- Vandal resistant laminar outlet
- 591TPA0250 Hardwire, order AC filter (063271A) and transformer separately • 591TPA1250 - Battery operated, batteries included • 591TPA0290 - Hardwire, order AC filter (063271A) and
- transformer separately
- 591TPA2220-PI Plug-in, power supply included Hardwire with battery back-up order 063268A for surface mount box, transformer required



590-PALGHDF-PI

591-PALGHDF

592-PALGHDF

592-PALGHDF-HW

592-PALGHDF-PI

591-PALGHDF-HW

591-PALGHDF-PI

Model

DEMD-320LF

Commercial Infrared Sensing – Solar & DEMD / C17

• 1-hole installation

• 4 7/8" long, 7 5/8" high

For cold or premixed water

• 2 1/2" max. deck thickness

Vandal resistant hidden spray outlet



Proximity Deckmount Bathroom Faucet



0.5 gpm

499.45

521.50

482.50

521.50

Chrome

Chrome

Chrome

Price Finish

Chrome

Chrome

Chrome

548.50

509.50

548.50

Chrome



- 5 1/4" long, 4 5/16" high
- Hands-free activation
- Entire spout is sensor
- Adjustable sensing range, auto shut-off, metering mode
- and periodic rinse feature
- Surface mounted control box
- Mixing valve required
- 2 1/2" max. deck thickness Vandal resistant laminar outlet
- No lift rod hole
- 590-PALGHDF Battery operated, batteries included
- 590-PALGHDF-HW Hardwire, order AC filter (063271A) and transformer separately
- 590-PALGHDF-PI Plug-in, power supply included
- Hardwire with battery back-up order 063268A for surface mount box, transformer required
- Audible low battery indicator

Proximity Deckmount Bathroom Faucet

0.5 gpm

0.5 gpm

0.5 gpm



- 3-hole 4" installation • 5 1/4" long, 4 7/8" high
- Hands-free activation
- · Entire spout is sensor
- · Adjustable sensing range, auto shut-off, metering mode
- and periodic rinse feature
- Surface mounted control box
- Mixing valve required
- 2" max. deck thickness
- Vandal resistant laminar outlet
- No lift rod hole
- 4" anti-rotation cover plate
- 591-PALGHDF Battery operated, batteries included
- 591-PALGHDF-HW Hardwire, order AC filter (063271A) and transformer separately
- 591-PALGHDF-PI Plug-in, power supply included
- Hardwire with battery back-up order 063268A for surface
- mount box, transformer required
- Audible low battery indicator

Proximity Deckmount Bathroom Faucet

0.5 gpm

0.5 gpm

0.5 gpm



- 3-hole 8" installation
- 5 1/4" long, 4 7/8" high Hands-free activation
- Entire spout is sensor
- · Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature
- Surface mounted control box
- Mixing valve required
- 2" max. deck thickness
- · Vandal resistant laminar outlet
- No lift rod hole
- 8" anti-rotation cover plate
- 592-PALGHDF Battery operated, batteries included
- 592-PALGHDF-HW Hardwire, order AC filter (063271A) and transformer separately
- 592-PALGHDF-PI Plug-in, power supply included
- Hardwire with battery back-up order 063268A for surface mount box, transformer required
- Audible low battery indicator



Electronic Solar Bathroom Faucet

Electronic Solar Bathroom Faucet

0.5 gpm

Model Flow DEMD-321LF 0.5 gpm



Price Finish

722.15 Chrome

Price Finish

769.40 Chrome

Price Finish

Chrome

Nickel Stainless

- 1-hole installation
- 4 7/8" long, 7 5/8" high
- Integrated side mixer to adjust temperature.
- Vandal resistant hidden spray outlet
- Red/blue indicators
- 2 1/2" max. deck thickness
- Solar powered, user activated infrared sensor with battery assist - 4 (AA) batteries required and included

• Solar powered, user activated infrared sensor with battery

assist - 4 (AA) batteries required and included



Electronic ASSE 1070 Thermostatic Bathroom Faucet

Model	Flow	Price	Finish
DEMD-611LF	.17 gpc	870.60	Chrome
DEMD-611-10LF	0.5 gpc	870.60	Chrome
	0,		





 1-hole installation
• 4 7/8" long, 7 5/16" hig
ACCE 1070 thermostatic

- ASSE 1070 thermostatic electronic metering faucet with above deck electronics
- Integrated thermostatic mixing valve
- Integrated solenoid
- Mixing handle adjusts temperature
- Anti-rotation pin
- 1 4/5" max. deck thickness
- · Vandal resistant wrench flat spray outlet
- Order 060585A for optional 4" cover plate
- Adjustable comfort limit stop
- · Battery operated, batteries included
- DEMD-611-10LF .25 gal/cycle @ 60 psi, .95 L/cycle @ 414 kPa based on 15 second max, run time
- DEMD-611LF .17 gal/cycle @ 60 psi, .64 L/cycle @ 414
- kPa based on 15 second max. run time



Electronic Bathroom Faucet

Model Flow 677.85 DEMD-101LF 0.5 gpm DEMD-101LF-NS 796.45 0.5 gpm




• 1-hole installation • 4 1/2" long, 6 7/8" high

- Above deck solenoid and battery
- For cold or premixed water
- Vandal resistant wrench flat spray outlet
- 1 1/2" max. deck thickness
- Battery operated, batteries included



Electronic Bathroom Faucet

Model Price Finish 0.5 gpm DEMD-111LF 720.15 Chrome DEMD-111LF-NS 846.20 Nickel Stainless 0.5 gpm



- 4 1/2" long, 6 7/8" high
- Above deck solenoid and battery
- Side mixer Red/blue indicator
- Vandal resistant wrench flat spray outlet
- 1 1/2" max. deck thickness
- Battery operated, batteries included



Electronic Bathroom Faucet



Model Price Finish Flow DEMD-112LF 720.15 0.5 gpm Chrome



- 1-hole installation • 4 1/2" long, 6 7/8" high
- Above deck solenoid and battery
- Side technicians mixer
- Temperature set and adjusted with Allen key (included)
- Vandal resistant wrench flat spray outlet
- 1 1/2" max. deck thickness
- · Battery operated, batteries included

Model

Model

DEMD-212LF

DEMD-211LF

DEMD-211LF-NS

DEMD-201LF

DEMD-201LF-NS



Electronic Bathroom Faucet

0.5 gpm

0.5 gpm

Flow

0.5 gpm

0.5 gpm

Flow

0.5 gpm



Price Finish

Price Finish

Price Finish

768.55 Chrome

Price

714.15

839.05

Finish

Chrome

Nickel Stainless

Chrome

Nickel Stainless

768.55

903.10

Chrome

853.30 Nickel Stainless

726.20

- 1-hole installation
- 6 5/16" long, 11 7/16" high
- Above deck electronics
- For cold or premixed water
- Vandal resistant wrench flat spray outlet

⊘DELTA.

- 1 1/4" max. deck thickness
- · Battery operated, batteries included



Electronic Bathroom Faucet



- 1-hole installation
- 6 5/16" long, 11 7/16" high
- Above deck electronics
- Side mixer
- Red/blue indicator
- · Vandal resistant wrench flat spray outlet
- 1 1/4" max. deck thickness
- · Battery operated, batteries included



Electronic Bathroom Faucet




- 1-hole installation • 6 5/16" long, 11 7/16" high
- Above deck electronics
- Side technicians mixer
- Temperature set and adjusted with Allen key (included)
- · Vandal resistant wrench flat spray outlet
- 1 1/4" max. deck thickness
- · Battery operated, batteries included



Electronic Bathroom Faucet



- 1-hole installation
- 4 5/16" long, 5 5/8" high
- For cold or premixed water



- - · Vandal resistant wrench flat spray outlet
 - 2" max. deck thickness
 - Battery operated, batteries included



Electronic Bathroom Faucet

DEMD-311LF

DEMD-311LF-NS



- 1-hole installation
- 4 5/16" long, 5 5/8" high
- Side mixer
- Red/blue indicators
- · Vandal resistant wrench flat spray outlet
- 2" max. deck thickness
- · Battery operated, batteries included



Electronic Bathroom Faucet



Model Price Finish DEMD-312LF 714.15 Chrome 0.5 gpm

0.5 gpm

0.5 gpm



- 1-hole installation
- 4 5/16" long, 5 5/8" high Side technicians mixer
- Temperature set and adjusted with allen key (included) · Vandal resistant wrench flat spray outlet
- 2" max. deck thickness
- · Battery operated, batteries included





Electronic Wall Mount Bathroom Faucet



887.40 Chrome 0.5 gpm 1042.60 Nickel Stainless 0.5 gpm

Price Finish

Chrome

996.95 Nickel Stainless

848.40

♦

- 1-hole wall mount installation •8" long
- For cold or premixed water • Hardwire, order transformer separately
- Hardwire 24 VAC to 9 VDC converter supplied



Electronic Wall Mount Bathroom Faucet

Flow

0.5 gpm

0.5 gpm



- 1-hole wall mount installation • 6" long
- For cold or premixed water
- Hardwire, order transformer separately
- Hardwire 24 VAC to 9 VDC converter supplied



DEMD Transformer

DEMD-402LF-NS

Model

DEMD-404LF

DEMD-404LF-NS

Price Finish 060958A 51.10

- Plug in transformer ONLY for select DEMD faucet models
- 120 VAC to 9 VDC No converter required
- For hardwire conversions, see specification sheets



DEMD Remote

Model	Flow	Price	Finish
060967A	-	275.05	-

• Remote control ONLY for select DEMD faucet models



DEMD Converter

Model	Flow	Price	Finish
060974A	-	72.90	-

- Hardwire converter ONLY for select DEMD faucet models
- 24 VAC to 9 VDC
- Transformer required; order separately
- For hardwire conversions, see specification sheets



Electronic Soap Dispenser

DESD-250

Model

Model

DESD-750

DESD-751

DESD-751-BL

DESD-550



- 1-hole installation
- 5 1/2" long, 4" high
- Deck mount electronic hand soap dispenser
- Non-metal spout
- 800 ml lotion hand soap with moisturizer included
- Battery operated, batteries included
- 2" max. deck thickness • 3 year warranty



Electronic Soap Dispenser

Flow

Flow



- 1-hole installation
- 5 1/2" long, 4" high
- Deck mount electronic hand soap dispenser
- Cast brass spout
- 27 oz (800 ml) lotion hand soap with moisturizer included
- Battery operated, batteries included
- 2" max. deck thickness 3 year warranty



Electronic Soap Dispenser



- 1-hole installation
- 4 1/8" long, 4 1/8" high
- Deck mount electronic hand soap dispenser
- Cast brass spout
- 33.8 oz (1,000 ml) refillable bottle included, soap not included
- To be used with standard liquid soaps with a viscosity up to 3,000 cPs
- DESD-750 plug-in operation
- DESD-751 battery operated, batteries included
- Overall size 20 1/8" x 2 1/8" x 3 1/2"
- 061310A Plug-in power supply to convert battery operated to plug-in
- 2" max. deck thickness
- 3 year warranty





Hand Soap with Moisturizer

Model * 060917A

Flow

Price Finish 42.15

Price Finish

318.95 Chrome

Price Finish

Price Finish

Chrome

Chrome

Black

535.50

535.50

661.00

Chrome

489.55

- 1600 ml
- Hand soap with moisturizer
- Restricted to case pack of 4 priced each • For use with DESD-250 and DESD-550



- Plug-in transformer to convert DESD-250 or DESD-550 to hardwire Soap Dispenser Plug-in Transformer
 - 120 VAC to 6 VDC
 - 060919A not required if this transformer is used



Soap Dispenser Converter

Model 060919A

060918A

Price Finish 70.90

Price Finish

85.05

- Hardwire converter to convert DESD-250 or DESD-550 to hardwire
- 24 VAC to 6 VDC
- Transformer required, order separately







⊘DELTA

4" Center Cover Plate

Model
061269A
061269BL
0010000

Model

061270A

Obsolete Q2 2021

Price Finish 74.50

Price Finish

130.35 Chrome

Chrome 89.45 Matte Black Brilliance® Stainless 061269SS 89 45



• 8" center cover plate

Anti-rotation pin

• For use with 620TP and 621TP series



4" Center Cover Plate

8" Center Cover Plate

Price Finish Model Flow 061305A 88.90 Chrome

Flow

97.20 Brilliance® Stainless 061305SS

- 4" centerset cover plate
- Anti-rotation pin • For use with 630TP / 630TPA and 631TP / 631TPA series



4" Center Cover Plate

Model Flow Price Finish RP30528 107.30 Chrome

- 4" center cover plate with locking pin
- Anti-rotation (2 1/2" x 7")
- For use with 590-HDF series



8" Center Cover Plate

Model RP34280 Flow Price Finish 143.80

Chrome

Price Finish

Price Finish

Chrome

95.10

Chrome

74.00

• 8" center cover plate with locking pin • Anti-rotation (2 1/2" x 11")

• For use with 590-HDF series



4" Center Cover Plate

Model 060546A Flow

• 4" center cover plate Anti-rotation pin

• For use with 590T and 1500T series



8" Center Cover Plate

Model 060547A

Flow

- 8" center cover plate Anti-rotation pin
- For use with 590T and 1500T series



4" Center Cover Plate

Model 061159A

Price Finish 74.00 Chrome

- 4" center cover plate Anti-rotation pin
- For use with 590TP / 590TPA and 590P-HDF / 590PA-HDF
- series



8" Center Cover Plate

Model Flow Price Finish 061160A 95.05 Chrome

- 8" center cover plate Anti-rotation pin
- For use with 590TP / 590TPA and 590P-HDF / 590PA-HDF

Flow

Flow

0.5 gpm

0.5 gpm





H,Optics® Bathroom Faucet

590LF-LGHGMHDF

590LF-HGMHDF



- 1-hole installation
- 5" long, 3 3/4" high
- All metal faucet construction
- Hands-free activation
- H₂Optics[®] Technology
- Mixing valve required
- 1" max. deck thickness
- Vandal resistant laminar outlet
- Less grid strainer
- No lift rod hole
- · Battery operated, batteries included



H,Optics® Bathroom Faucet



- 1-hole installation • 5" long, 3 3/4" high
- All metal faucet construction
- Hands-free activation H₂Optics[®] Technology
- Mixing valve required
- 1" max. deck thickness
- Vandal resistant laminar outlet
- Grid strainer
- · No lift rod hole
- · Battery operated, batteries included



H,Optics® Bathroom Faucet



Flow 591LF-LGHGMHDF 0.5 gpm

Price Finish 505.10 Chrome

Price Finish

481.80 Chrome

Price Finish

Chrome

507.40

- 3-hole 4" installation • 5" long, 4 3/8" high
- All metal faucet construction
- Hands-free activation
- H₂Optics[®] Technology
- Mixing valve required
- 1 1/2" max. deck thickness
- Vandal resistant laminar outlet
- Less grid strainer
- No lift rod hole
- 4" Anti-rotation cover plate
- · Battery operated, batteries included




H.Optics® Bathroom Faucet




- 591LF-HGMHDF
 - 0.5 gpm
- - Price Finish 530.65 Chrome
- 3-hole 4" installation • 5" long, 4 3/8" high
 - All metal faucet construction
 - Hands-free activation
 - H₂Optics* Technology
 - · Mixing valve required
 - 1 1/2" max. deck thickness Vandal resistant laminar outlet
 - Grid strainer
 - No lift rod hole
 - 4" Anti-rotation cover plate
 - · Battery operated, batteries included













- - 5" long, 7" high Cast body
 - Hands-free activation
 - H₂Optics[®] Technology
 - Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature
 - Surface mounted control box
 - Recessed control box options available
 - Mixing valve required
 - 2 1/2" max. deck thickness

 - Vandal resistant Agion[®] antimicrobial laminar outlet • Order 060546A for 4" or 060547A for 8" optional cover plate
 - 590T0120 Hardwire, order transformer separately
 - 590T1120 Battery operated, batteries included
 - Hardwire with battery back-up, order 061047A; transformer required



H,Optics® Bathroom Faucet



Price Finish 591T0250 0.5 gpm 620.40 Chrome 591T1250 0.5 gpm 620.40 Chrome



- 3-hole 4" installation • 5" long, 5 5/16" high
- Cast body
- Hands-free activation
- H₂Optics[®] Technology • Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature
- Surface mounted control box
- Recessed control box options available
- Mixing valve required
- 2 1/2" max. deck thickness
- Vandal resistant laminar outlet
- 591T0250 Hardwire, order transformer separately
- 591T1250 Battery operated, batteries included
- Hardwire with battery back-up, order 061047A; transformer required



H,Optics® Deck Mount Faucet

Model
Mouci
1500T3320

1501T3320

1.5 gpm 1.5 gpm

Price 710.15 Chrome 710.15 Chrome

Price Finish

Chrome

Chrome

769.35

769.35



- 6" long, 14 3/4" high • Cast brass body
- Hands-free activation
- H₂Optics[®] Technology
- Adjustable sensing range, auto shut-off, metering mode
- and periodic rinse feature
- Surface mount box
- · Mixing valve required
- 2 1/2" max. deck thickness Vandal resistant Agion[®] antimicrobial laminar outlet
- Order 060546A for 4" or 060547A for 8" optional cover plate
- 1500T3320 Hardwire, order transformer separately
- 1501T3320 Battery operated, batteries included • Hardwire with battery back-up, order 061047A; transformer



H,Optics® Wall Mount Faucet



Model Flow 1500T4670 1.5 gpm 1501T4670 1.5 gpm



③ ♦ &


- Wall mount installation
- 6" long, 15 1/2" high Cast brass body

required

- Hands-free activation
- H₂Optics[®] Technology • Adjustable sensing range, auto shut-off, metering mode

and periodic rinse feature

- Surface mount box
- Mixing valve required
- Smooth end spout with laminar flow control in base
- 1500T4670 Hardwire, order transformer separately
- 1501T4670 Battery operated, batteries included Hardwire with battery back-up, order 061047A; transformer required




















- Trim only
 - Order 3000T4128ARI rough separately
 - Hands-free activation
 - H₂Optics[®] Technology
 - 4.5" x 4.5" stainless steel wall plates with chrome plated rigid stub spout

 - Laminar swivel outlet
 - Field adjustable sensor range and meter mode retains
 - settings in event of power failure
 - Hardwire, order transformer separately
 - Hardwire with battery back-up, order 061047A; transformer required



Low Profile Institutional Double Sensor Rough

Flow Price Finish 3000T4128ARI 727.65

Rough-in only

- Order 3000T4128ATR trim separately
- 10" x 10" metal box with thermostatic mixing valve
- 4" square boxes for sensor wall plates
- 4" square box for spout wall plate
- Integral check valves
- Max. flow 5.8 gpm @ 45 psi, 22 L/min @ 310 kPa
- Min. flow .35 gpm, 1.3 L/min @ thermostatic mixing valve





Low Profile Institutional Single Sensor Trim




Price Finish 3000T4328ATR 771.75 Chrome 1.5 gpm



- Order 3000T4328ARI rough separately
- Hands-free activation
- H₂Optics[®] Technology
- 4.5" x 4.5" stainless steel wall plate with chrome plated rigid stub spout
- · Laminar swivel outlet
- Field adjustable sensor range and meter mode retains settings in event of power failure
- Hardwire, order transformer separately
- Hardwire with battery back-up, order 061047A;





Low Profile Institutional Single Sensor Rough

Model	
3000T4328ARI	

661.50

Chrome

Price Finish

- Rough-in only
 Order 3000T4328ATR trim separately
- 10" x 10" metal box with thermostatic mixing valve
- 4" square box for sensor wall plate
- 4" square box for spout wall plate
- Integral check valves
- Max. flow 5.8 gpm @ 45 psi, 22 L/min @ 310 kPa
- pressure loss
- Min. flow .35 gpm, 1.3 L/min @ thermostatic mixing valve





Commercial Rough-In & Mixing Valves / C25



Deckmount Bathroom Rough-in Valve

Model	Flow	Price	Finish
ELAVT0008ARI	-	715.70	-

- Rough-in only
- Below deck
- Recessed mount 10" x 10" box with thermostatic mixing
- Order trim separately



Deckmount Bathroom Rough-in Valve

Model	Flow	Price	Finish
ELAVT0001ARI	-	481.45	-

- Rough-in only
- Below deck
- Recessed mount 10" x 10" box with single inlet supply
- · Order trim separately



Plug-in Power Supply

odel	Flow	Price	Finis
3266A	-	48.00	-



- Supplies power for up to 5 faucets
- Use with proximity faucet series 590-PAHDF, 590TPA, 591TPA, 620TPA, 630TPA



Hardwire AC Filter

Model	Flow	Price	Finish
063271A	-	39.00	-

- Hardwire filter for proximity installations
- AC filter 24V AC to 18V DC
- Use with proximity faucet series 590-PAHDF, 590TPA, 591TPA, 620TPA, 630TPA



Battery Back-up Assembly - Surface Box

Model	Flow	Price	Finis
063268A	-	61.75	-

- Battery backup for surface mount box #0 to convert installed hardwire or plug-in models
- One battery backup unit required for every spout/box
- Use with proximity faucet series 590-PAHDF, 590TPA, 591TPA, 620TPA, 630TPA
- Batteries included



Battery Back-up Assembly - Recessed Box

Model	Flow	Price	Finis
063269A	-	61.75	-

- Battery backup for recessed mount boxes #1 and #8 to convert installed hardwire models
- One battery backup unit required for every spout/box
- Use with proximity faucet series 590TPA, 591TPA, 620TPA,
- Batteries included



Hardwire Converter

Price Finish Flow 54.25 063270A

- Converts 24 VAC to 6.4 VDC
- Use with proximity faucet series 590-PAHDF, 590TPA, 591TPA, 620TPA, 630TPA



Proximity Retrofit Kit

Model Flow Price Finish 063276A 275.00

- Proximity upgrade/conversion kit for hardwire recessed box • Use with proximity faucet series 590-PAHDF, 590TPA,
- 591TPA, 620TPA, 630TPA



Optional Hardwire Transformer

Model	Flow
RP32508	-

• Hardwire transformer

• Supplies power for up to 10 Delta 590-HDF electronic faucets converted to hardwire or for 10 - 860T faucets or up to 5 - 3000T, 1500T, 590T, 590-PAHDF, 590TP / 590TPA, 591T, 591TP / 591TPA, 600T, 620TP / 620TPA, 630TP / 630TPA, DEMD, 1600T, 81THWA and 81TWMS series



Plug-in Transformer

Model	Flow	Price	Finish
RP32856	-	52.65	-

Price Finish

52.65

- Plug-in transformer
- Supplies power for up to 10 Delta 590-HDF electronic faucets converted to hardwire or for 10 - 860T faucets or up to 5 - 3000T, 1500T, 590T, 590TP, 591T, 591TP, 600T, 620TP, 630TP, DEMD, 1600T, 81THWA and 81TWMS series



Hardwire Converter with Battery Back-Up

Model	FIOW	Price	Fini
061047A	-	61.75	-

- Hardwire converter with battery back-up
- Use with series 590T, 590TP, 590-PHDF, 590-HDF, 591T, 591TP, 600T, 620TP, 630TP, 860T, 1500T, 1600T, 3000T, 81THWA and 81TWMS series faucets



Hardwire Converter

odel	Flow	Price	Finish
60683A	-	54.25	-

- Hardwire converter
- Converts 24 VAC to 6.4 VDC for 590-HDF, 3000T, 1500T, 590T, 590TP, 591T, 591TP, 600T, 620TP, 630TP, 1600T, 81THWA and 81TWMS
- Converts 24 VAC to 6.4 VDC



Mechanical Mixer

lodel	Flow	Price	Finis
2910-MIXLF	-	73.50	-

- Mechanical mixer
- 2.0 gpm @ 60psi, 7.6 L/min @ 414kPa



Thermostatic Mixing Valve

Model	Flow	Price	Finish
R3070-MIXLF	-	152.60	-

- Thermostatic mixing valve
- IAPMO listed to ASSE 1070 • 3/8" compression inlets / outlets
- Check valves on inlets
- Min. 0.35 gpm, 1.3 L/min flow rate
- Max. flow of 5.8 gpm, 22 L/min @ 45 psi pressure loss



Thermostatic Mixing Valve

Model	Flow	Price	Finish
R2570-MIXLF	-	188.30	-

- Thermostatic mixing valve
- IAPMO listed to ASSE 1069, ASSE 1070
- 1/2" copper sweat inlets / outlets Check valves on inlets
- Min. 0.34 gpm, 1.29 L/min flow rate
- Max. 11.0 gpm, 42 L/min flow rate

ASME A112.18.1/CSA B125.1. ASME A112.18.1/CSA B125.1. DEFM-100

81T201BTA-MM0

Model

81T201BTA

81T201BTA-DF

81T201BTA-MM0-BL



Electronic Side Mount Flush Kit



Price Finish

Price Finish

Price Finish

Chrome

Finish

Chrome

596.70

596.70

Chrome

Matte Black

596.70

716.00

Chrome

355.50



⊘DELTA.

- For Sloan*, Crane* and some Zurn* Models
- 3 year warranty
- · Battery operated, batteries included



H₂Optics[®] Exposed Flush Valve

1.6 gpf

1.6 gpf

Flow

1.6 gpf

1.6 gpf



- Electronic exposed flush valve Hands-free operation
- Push-button mechanical override
- H₂Optics[®] Technology Body mounted sensor
- For 1 1/2" top inlet water closet fixture
- · Battery operated, batteries included • Factory set flow rate, field adjustable



H₂Optics® Exposed Flush Valve



- Hands-free operation H₂Optics[®] Technology
 - For 1 1/2" top inlet water closet fixture

Electronic exposed flush valve

- Body mounted sensor
- Battery operated, batteries included
- 81T201BTA Factory set flow rate, field adjustable



H₂Optics[®] Exposed Flush Valve



- · Electronic exposed flush valve
- Hands-free operation
- H₂Optics* Technology
- For 1 1/2" top inlet water closet fixture
- Body mounted sensor
- DF models have dual flush settings factory set to ON to provide a 30% water reduced flush based on time and distance
- · Battery operated, batteries included
- · Factory set flow rate, field adjustable





H,Optics® Exposed Flush Valve



Model Price Finish Flow 81T201HWA 1.6 gpf 648.55 Chrome



ⓒ 🌾 👃

- Electronic exposed flush valve
- Hands-free operation H₂Optics[®] Technology
- For 1 1/2" top inlet water closet fixture
- Body mounted sensor
- Hardwire, order transformer separately
- Hardwire with battery back-up order 061047A; transformer
- 81T201HWA Factory set flush, field adjustable
- 81T201HWA-6 Factory set flow rate, NOT field adjustable



Solar Exposed Flush Valve



Model	Flow	Price	Finish
81T201SP-MM0	1.6 gpf	721.35	Chrome
81T201SP-42-MM0	1.1 gpf	721.35	Chrome
81T201SP-48-MM0	1.27 gpf	721.35	Chrome
81T201SP-DF-MMO	1.6 gpf	721.35	Chrome

81T201SP-MMO and 81T201SP-DF-MMO are not WaterSense® Labeled

· Electronic exposed solar flush valve

- Hands-free operation
- Push-button mechanical override
- Solar powered with 4 (AA) batteries required and included
- For 1 1/2" top inlet water closet fixture
- Body mounted sensor
- Optional 24 hour automatic flush, factory set to OFF
- 81T201SP-MMO Factory set flow rate, field adjustable • 81T201SP-42-MMO - Factory set flow rate, NOT field
- adjustable • 81T201SP-48-MMO - Factory set flow rate, NOT field
- adjustable • 81T201SP-DF-MMO - Dual flush set to ON: full flush or
- 30% reduced flush: factory set flow rate, field adjustable • Field adjustable models - EZ Adjust™ screw allows flush to
- be adjusted without shutting off water supply



H,Optics® Exposed Flush Valve





- Electronic exposed flush valve
- · Hands-free operation Push-button mechanical override
- H₂Optics* Technology
- For 3/4" top inlet urinal fixture
- Body mounted sensor
- · Battery operated, batteries included
- · Factory set flow rate, field adjustable



H,Optics® Exposed Flush Valve



Flow Price Finish Model 81T231BTA 596.70 Chrome 0.5 gpf




- Hands-free operation
- H₂Optics[®] Technology
- For 3/4" top inlet urinal fixture
- Body mounted sensor
- Battery operated, batteries included Factory set flow rate, field adjustable



H₂Optics® Exposed Flush Valve



Model Flow Price Finish 81T231BTA-19 596.70 0.5 gpf Chrome



- Hands-free operation
- H₂Optics[®] Technology
- For 3/4" top inlet urinal fixture
- Body mounted sensor · Battery operated, batteries included
- Factory set flush, NOT field adjustable

See pages CI and CII for icon definitions. ASME A112.18.1/CSA B125.1

See pages CI and CII for icon definitions. ASME A112.18.1/CSA B125.1

0.5 gpf

0.5 gpf

1.27 gpf

1.6 gpf

0.5 gpf

81T201-WMSHWA is not WaterSense® Labeled

648.55

Chrome

Price Finish

Chrome

648.55

Price

807.35

807.35

Finish

Chrome

Chrome

Price Finish

807.35 Chrome

H₂Optics® Exposed Flush Valve

H,Optics[®] Exposed Flush Valve

H₂Optics[®] Exposed Flush Valve

81T201-48-WMSHWA

81T201-WMSHWA

81T231-WMSHWA

81T231HWA

Model

81T231HWA-19

Electronic exposed flush valve

· Hardwire, order transformer separately

• Factory set flow rate, field adjustable

Electronic exposed flush valve

• For 3/4" top inlet urinal fixture

• Electronic exposed flush valve

• For 1 1/2" top inlet water closet fixture

Hardwire, order transformer separately

Hardwire with battery back-up, order 061047A;

• 81T201-48-WMSHWA - Factory set flow rate, NOT field

• 81T201-WMSHWA - Factory set flow rate, field adjustable

• Hands-free operation

H₂Optics[®] Technology

transformer required

Electronic exposed flush valve

• For 3/4" top inlet urinal fixture

· Hardwire, order transformer separately

• Factory set flow rate, field adjustable

Hardwire with battery back-up, order 061047A;

· Hands-free operation

• H₂Optics° Technology

transformer required

Wall mount sensor

Wall mount sensor

· Hardwire, order transformer separately

• Factory set flow rate, NOT field adjustable

Hardwire with battery back-up, order 061047A;

Hands-free operation

• H₂Optics° Technology

Body mounted sensor

transformer required

Hardwire with battery back-up, order 061047A;

Hands-free operation

 H₂Optics[®] Technology • For 3/4" top inlet urinal fixture

Body mounted sensor

transformer required

(&

Ė

③ 🍁 📐

Price Finish

721.35 Chrome

Chrome

Chrome

721.35

721.35

• 81T231SP-MMO - Factory set flow rate, field adjustable • 81T231SP-05-MMO - Factory set flow rate, NOT field

adjustable • 81T231SP-19-MMO - Factory set flow rate, NOT field

adjustable

• Field adjustable models - EZ Adjust™ screw allows flush to be adjusted without shutting off water supply



(i)

⊘DELTA.

H₂Optics[®] Concealed Flush Valve Rough

Solar Exposed Flush Valve

Model

81T231SP-MM0

81T231SP-05-MM0

81T231SP-19-MM0

1.1 gpf 538.90

0.5 gpf

0.5 gpf

0.125 gpf



- Electronic concealed flush valve rough
- Order 1600T6102ATR-42 trim separately
- Supplied as complete flush valve and wall access frame
- Hands-free operation • H₂Optics* Technology
- For 1 1/2" back inlet wall hung water closet fixture
- Factory set flow rate, NOT field adjustable



81T231SP-MM0 is not WaterSense® Labeled

Price Finish 1600T6102ARI-42



H,Optics® Concealed Flush Valve Trim

Flow Price Finish 1600T6102ATR-42 1.1 gpf 538.90



- Electronic concealed flush valve trim
- Order 1600T6102ARI-42 rough separately
- Supplied as sensor, hardwire converter, solenoid and 14" x 20" stainless steel cover
- Hands-free operation
- H₂Optics[®] Technology
- For 1 1/2" back inlet wall hung water closet fixture
- Hardwire, order transformer separately
- Hardwire with battery back-up, order 061047A; transformer required



H,Optics® Concealed Flush Valve Rough

Price Finish Model Flow 1600T6103ARI 532.30 1.6 gpf 1600T6103ARI-48 1.27 gpf 532.30

1600T6103ARI is not WaterSense® Labeled



- Supplied as complete flush valve and wall access frame Hands-free operation

• Electronic concealed flush valve rough

Order 1600T6103ATR trim separately

- H₂Optics[®] Technology
- For 1 1/2" back inlet wall hung water closet fixture
- 1600T6103ARI Factory set flow rate, field adjustable
- 1600T6103ARI-48 Factory set flow rate, NOT field adjustable



H₂Optics[®] Exposed Flush Valve

H₂Optics[®] Exposed Flush Valve

Flow Price Finish 81T231-05-WMSHWA 0.125 gpf 807.35 Chrome 81T231-19-WMSHWA 0.5 gpf 807.35 Chrome **③** 🍁 法

③ ♦ &

- Electronic exposed flush valve
 - Hands-free operation
 - H₂Optics[®] Technology
 - For 3/4" top inlet urinal fixture Wall mount sensor
 - Hardwire, order transformer separately
 - Hardwire with battery back-up, order 061047A; transformer required
 - Factory set flow rate, NOT field adjustable

H,Optics® Concealed Flush Valve Trim

Model Price Finish 1600T6103ATR 1.6 gpf 532.30 1600T6103ATR-48 1.27 gpf 532.30

1600T6103ATR is not WaterSense® Labeled




- Electronic concealed flush valve trim • Order 1600T6103ARI rough separately
- Supplied as sensor, hardwire converter, solenoid and 14"
- stainless steel cover
- Hands-free operation • H₂Optics* Technology
- For 1 1/2" back inlet wall hung water closet fixture
- Hardwire, order transformer separately
- Hardwire with battery backup, order 061047A, transformer required

See pages CI and CII for icon definitions. ASME A112.18.1/CSA B125.1

See pages CI and CII for icon definitions. ASME A112.18.1/CSA B125.1

C32 / Commercial Concealed & Exposed Flush Valves for Washdown Urinals





1600T9001RI

1600T9001TR

Model

DEMD-86505

H,Optics® Concealed Valve Rough for Washdown Urinals

0.5 gpf

Price Finish

Price Finish

Price Finish

Chrome

513.05

420.60

420.60



• Electronic concealed flush valve rough-in for washdown urinals • Order 1600T9001TR trim separately

- Supplied as wall box, stop and outlet hose
- Hands-free operation
- H₂Optics* Technology
- For 3/4" back inlet
- Factory set flow rate, field adjustable



H.Optics[®] Concealed Valve Trim for Washdown Urinals

0.5 gpf



• Electronic concealed flush trim rough-in for washdown urinals

- Order 1600T9001RI rough separately
- Supplied as sensor, hardwire converter, solenoid and 10" stainless steel cover
- · Hands-free operation
- H₂Optics[®] Technology
- For 3/4" back inlet
- Hardwire, order transformer separately
- Hardwire with battery backup order 061047A; transformer



Electronic Washdown Urinal Valve

Flow

0.5 gpf



- Electronic washdown urinal valve less vacuum breaker · Hands-free operation

 - Battery operated, batteries included
 - Factory set flow rate, field adjustable
 - Installation Warning: Model shown must be installed on a fixture providing sufficient air gap protection against



Electronic Washdown Urinal Valve



- Electronic washdown urinal valve with vacuum breaker · Hands-free operation
- Battery operated, batteries included
- Factory set flow rate, field adjustable



DEMD-86515 0.5 gpf





Electronic Washdown Urinal Valve



Price Finish DEMD-86405 483.85 0.5 gpf Chrome

- Retrofit electronic washdown urinal valve less vacuum breaker
- Hands-free operation
- Replaces 86T505 manual valve
- Retrofits to stop for 86T505 less vacuum breaker
- Battery operated, batteries included
- Factory set flow rate, field adjustable
- Installation Warning: Model shown must be installed on a fixture providing sufficient air gap protection against

See pages CI and CII for icon definitions. ASME A112.18.1/CSA B125.1



Commercial Exposed Flush Valves for Washdown Urinals / C33



Electronic Washdown Urinal Valve

Model

Model

86T505



Price Finish Flow DEMD-86415 0.5 gpf 513.05 Chrome

0.5 gpf

Price Finish

Chrome

175.85



- Retrofit electronic washdown urinal valve with vacuum hreaker
- Hands-free operation
- Replaces 86T505 manual valve and 86T610 VB outlet
- Retrofits to stop for 86T505 with vacuum breaker
 - Battery operated, batteries included
 - Factory set flow rate, field adjustable



Washdown Urinal Valve



- Cast urinal valve
- For washdown urinal only
- 1/2" back inlet stop
- · Vandal resistant handle • Metering, slow-close lever style
- For 3/4" IP spud
- Factory set flow rate, field adjustable
- Installation Warning: Model shown above must be installed on a fixture providing sufficient air gap protection against backflow

How To Order a Complete MultiChoice® 13, 14 or 17 Series Tub/Shower Faucet



Complete Faucet



select desired rough



select desired trim (with cartridge)



MultiChoice® Universal Tub/Shower Rough - Universal Inlets / Outlets

Model	Flow	Price	Finis
R10000-UN	-	62.40	-
R10000-UNBX	-	62.40	-
R10000-UNBXT	-	66.95	-
R10000-UNWS	-	87.50	-
R10000-UNWSBXT	-	92.00	-

- · Valve body only
 - Accepts single-function (13/14), dual-function (17) or dual-function thermostatic (17T) cartridge
 - Cartridge ships with trim • 1/2" universal inlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters
 - 1/2" universal outlets; inlets / outlets have male threads
 - Back-to-back capability
 - BX = single box model
 - BXT = single box model, thin wall mounting kit included
 - WS = with stops
 - R10000-UNBX and R10000-UNBXT models include test
 - R10000-UN restricted to case pack of 12 priced each



MultiChoice® Universal High-Flow Shower Rough -Universal Inlets / Outlets

Model	Flow	Price	Finish
R10000-UNBXHF	-	62.40	-
R10000_UNWSHE	_	87 50	_

- Valve body only
- . Shower only; no tub outlet
- Accepts single-function (13/14), dual-function (17) or dual-function thermostatic (17T) cartridge
- · Cartridge ships with trim
- 1/2" universal inlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters
- 1/2" universal outlets, inlets / outlets have male threads
- · Back-to-back capability
- BX = single box model
- HF = high flow
- WS = with stops
- R10000-UNBXHF includes test plug



MultiChoice® Universal Tub/Shower Rough - IPS Inlets / Outlets

	Model	Flow	Price	Finis
*	R10000-IP	-	62.40	-
	R10000-IPWS	-	87.50	-

- Valve body only
- Accepts single-function (13/14), dual-function (17) or dual-function thermostatic (17T) cartridge
- Cartridge ships with trim
- 1/2" female IPS inlets / outlets to accept PEX or CPVC adapters
- Back-to-back capability
- WS = with stops
- R10000-IP restricted to case pack of 12 priced each



MultiChoice® Universal Tub/Shower Rough - PEX Crimp

	Model	Flow	Price	Finish
*	R10000-PX	-	62.40	-
	R10000-PXWS	-	87.50	-

- · Valve body only
- Accepts single-function (13/14), dual-function (17) or dual-function thermostatic (17T) cartridge
- · Cartridge ships with trim
- 1/2" PEX crimp inlets and 1/2" universal outlets with male threads
- · Back-to-back capability
- WS = with stops
- R10000-PX restricted to case pack of 12 priced each



MultiChoice® Universal Tub/Shower Rough - PEX Cold Expansion

	Model	Flow	Price	Finish
r	R10000-MF	-	62.40	-
	R10000_MFWS	_	87 50	_

- · Valve body only
- Accepts single-function (13/14), dual-function (17) or dual-function thermostatic (17T) cartridge
- Cartridge ships with trim
- 1/2" PEX cold expansion inlets and 1/2" universal outlets with male threads
- Back-to-back capability
- WS = with stops
- R10000-MF restricted to case pack of 12 priced each

Models noted with an * must be ordered in case quantity, priced each. See page 4 for icon definitions. Valve rating is 1.2 GPM minimum (4.5 L/min) for 13, 14 and 17 series pressure-balance and 17T series thermostatic at 45 psi (310kPa). ASME A112.1016/ASSE 1016/CSA B125.16.



Commercial MultiChoice® Roughs / Monitor® T14 Pressure Balance Trim / C35



MultiChoice® Universal Tub/Shower Rough -Push-Button Diverter

Model	Flow	Price	F
R10300-UNWS	-	192.75	-

MultiChoice® Universal Tub/Shower Rough -

- Valve body only for push button diverter
- Accepts single function (13/14) cartridge
- · Cartridge ships with trim kit
- 1/2" universal inlets to accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters
- 1/2" universal outlets; inlets / outlets have male threads

• Use with MultiChoice® Universal T13H and T17TH Series

- Back-to-back capability
- WS = with stops

• WS = with stops

• Rough-in for push button diverter





R10700-UNWS 132.20

Monitor® 14 Series Tub & Shower Trim - Less Head

Price

Price Finish

Price Finish

Chrome

175.60

Chrome

285.00

Finish



• Single-function pressure balance cartridge

with diverter valve for dual showers

Valve and diverter cartridges ship with trim kit

Handle and flange ships with trim

- Order MultiChoice® Universal rough separately
- Metal lever handle adjusts temperature
- Red/blue indicators
- RP77991 adds 1 3/4" to max. installation thickness
- 7 1/8" pull-up tub spout • Sweat spout onto 1/2" C.W.T. or thread onto 1/2" IPS
- Order shower head separately (LHD)





Model

T14251-LHD

ADA for valve control only

T14453-LHD

Monitor® 14 Series Shower Trim - Less Head



- Single-function pressure balance cartridge
- Order MultiChoice® Universal rough separately Metal lever handle adjusts temperature
- Hot/cold indicators
- RP77991 adds 1 3/4" to max. installation thickness
- Order shower head separately (LHD)



Dryden[™] Monitor® 14 Series Tub & Shower Trim - Less Head



Finish Model Price T14451-LHD 215.70 Chrome



ADA for valve control only

T14297-LHP-LHD

T14297-SSLHP-LHD



- Order MultiChoice® Universal rough separately
- Single-function pressure balance cartridge Metal lever handle adjusts temperature
- Hot/cold indicators
- RP77991 adds 1 3/4" to max. installation thickness • 6 1/4" pull-up tub spout
- Tri-universal adapter for thread 1/2" IPS, sweat 1/2" C.W.T.
- or slip onto 1/2" C.W.T
- Order shower head separately (LHD)



Cassidy" Monitor® 14 Series Shower Trim - Less Handle - Less Head



Flow Price Finish Model

158.20

219.65

Chrome

Brilliance® Stainless



- Single-function pressure balance cartridge • Order MultiChoice® Universal rough separately
- Order handle separately (LHP)
- Handle adjusts temperature
- Hot/cold indicators
- RP77991 adds 1 3/4" to max. installation thickness
- Order shower head separately (LHD)

See pages CI and CII for icon definitions. Valve rating is 1.2 GPM minimum (4.5 L/min) for 13, 14 and 17 series pressure-balance and 17T series thermostatic at 45 psi (310kPa).



Cassidy

T14497-LHP-LHD

T14497-SSLHP-LHD

Model

Monitor® 14 Series Tub & Shower Trim - Less Handle - Less Head

198.05

Price Finish

Chrome

274.95 Brilliance® Stainless



- Single-function pressure balance cartridge
- Order MultiChoice® Universal rough separately
- Order handle separately (LHP) Handle adjusts temperature
- Hot/cold indicators
- RP77991 adds 1 3/4" to max. installation thickness
- 7 2/3" pull-up tub spout
- Sweat spout onto 1/2" C.W.T. or thread onto 1/2" IPS

⊘DELTA.

• Order shower head separately (LHD)



Recommended Cassidy Bath Collection Handles



E FP

Model Price H795 58.85 H795SS 77.20



- Metal cross handle Sold as a single handle
- For 13/14 Series shower and floor mount tub filler applications

T14267-LHD

T14267-SSLHD





Finish

Finish

Chrome

Brilliance® Stainless

Chrome

Brilliance® Stainless

186.10

285.30

Price

223.40

337.50

Price

160.90

225 25

Finish

Chrome

Brilliance® Stainless

Metal lever handle

Model

- Sold as a single handle • For 13/14 Series shower and floor
- mount tub filler applications

Price

50.05

70.05



Monitor® 14 Series Shower Trim - Less Head



- Single-function pressure balance cartridge
 - Order MultiChoice® Universal rough separately
 - Metal lever handle adjusts temperature
 - Red/blue indicators
 - RP77991 adds 1 3/4" to max. installation thickness
 - Order shower head separately (LHD)







- Single-function pressure balance cartridge
- Order MultiChoice® Universal rough separately
- Metal lever handle adjusts temperature
- Red/blue indicators
- RP77991 adds 1 3/4" to max, installation thickness
- 7 1/8" pull-up tub spout
- Sweat spout onto 1/2" C.W.T. or thread onto 1/2" IPS
- Order shower head separately (LHD)





Compel⁶

Model

Model

T14461-LHD

T14461-SSLHD

T14261-LHD

T14261-SSLHD

Model

T14467-LHD

T14467-SSLHD

ADA for valve control only

Monitor® 14 Series Shower Trim - Less Head



- Order MultiChoice® Universal rough separately
- Single-function pressure balance cartridge Metal lever handle adjusts temperature
 - Red/blue indicators
 - RP77991 adds 1 3/4" to max. installation thickness
 - Order shower head separately (LHD)





- Single-function pressure balance cartridge
- Red/blue indicators
- RP77991 adds 1 3/4" to max. installation thickness
- 7" pull-up tub spout
- Order shower head separately (LHD)



Monitor® 14 Series Tub & Shower Trim - Less Head













- Metal lever handle adjusts temperature
- Sweat spout onto 1/2" C.W.T. or thread onto 1/2" IPS

See pages CI and CII for icon definitions. Valve rating is 1.2 GPM minimum (4.5 L/min) for 13, 14 and 17 series pressure-balance and 17T series thermostatic at 45 psi (310kPa). ASME A112.1016/ASSE 1016/CSA B125.16.







Model Price Finish Flow T14259-LHD 138.45 Chrome T14259-BLLHD 193.80 Matte Black

193.80

Brilliance® Stainless



- Single-function pressure balance cartridge
- Order MultiChoice® Universal rough separately
- Metal lever handle adjusts temperature
- Red/blue indicators

Red/blue indicators

• 6 1/8" pull-up tub spout

• Slip-on spout for 1/2" C.W.T.

• Order shower head separately (LHD)

- RP77991 adds 1 3/4" to max. installation thickness
- Order shower head separately (LHD)

• Single-function pressure balance cartridge

• Order MultiChoice® Universal rough separately Metal lever handle adjusts temperature

• RP77991 adds 1 3/4" to max. installation thickness




T14259-SSLHD





Model Price Finish T14459-LHD 162.35 Chrome T14459-BLLHD 227.30 Matte Black T14459-SSLHD 227.30 Brilliance® Stainless



Lahara°

T14238-LHD

T14238-SSLHD



Brilliance® Stainless

183 15

E FP

- Single-function pressure balance cartridge • Order MultiChoice® Universal rough separately
- Metal lever handle adjusts temperature
- Hot/cold indicators
- RP77991 adds 1 3/4" to max. installation thickness
- Order shower head separately (LHD)



Lahara® Monitor® 14 Series Tub & Shower Trim - Less Head



Model Flow Price Finish T14438-LHD 159.90 Chrome T14438-SSLHD 221.10 Brilliance® Stainless




- Order MultiChoice® Universal rough separately Metal lever handle adjusts temperature
 - Hot/cold indicators
 - RP77991 adds 1 3/4" to max. installation thickness

• Single-function pressure balance cartridge

- 5 1/2" pull-up tub spout
- Tri-universal adapter for thread 1/2" IPS, sweat 1/2" C.W.T or slip onto 1/2" C.W.T
- Order shower head separately (LHD)







Monitor® 13 Series Tub & Shower Trim

1.75 gpm

Classic

Model

T13420-SHCCER

ADA for valve control only

Price Finish

107.30 Chrome

92.55

Chrome

Commercial Monitor® T13 Pressure Balance Trim / C39

• Red/blue indicator

• RP77991 adds 1 3/4" to max, installation thickness

• Touch-Clean[®] full body shower head is WaterSense[®] labeled



⊘DELTA

• Single-function pressure balance ceramic cartridge • Order MultiChoice Universal rough separately

- Metal lever handle adjusts temperature Hot/cold indicators
- RP77991 adds 1 3/4" to max. installation thickness
- 5 1/2" metal pull-up tub spout
- Slip-on spout for 1/2" C.W.T.
- Touch-Clean* 3-setting shower head is WaterSense* labeled
- Full Body Spray, Massage Spray, Soft Drench Spray



Commercial Monitor® 13 Series Valve Only Trim

Model Price Finish T13090 88.90 Chrome

- Single-function pressure balance cartridge • Order MultiChoice Universal rough separately
- Vandal resistant blade handle adjusts temperature
- · Red/blue indicator
- RP77991 adds 1 3/4" to max. installation thickness



Commercial Monitor® 13 Series Shower Trim

Model Price Finish T13290 1.75 gpm 107.30 Chrome



③ 🍁 法

◎ ♦ &

Price Finish

Chrome


225.50

- Single-function pressure balance cartridge
- Order MultiChoice® Universal rough separately
- Vandal resistant blade handle adjusts temperature
- Red/blue indicator
- RP77991 adds 1 3/4" to max, installation thickness
- Touch-Clean° full body shower head is WaterSense° labeled



Commercial Monitor® 13 Series Tub & Shower Trim

Model Price Finish T13490 1.75 gpm 133.90 Chrome





- Single-function pressure balance cartridge
- Order MultiChoice® Universal rough separately
- Vandal resistant blade handle adjusts temperature • Red/blue indicator
- RP77991 adds 1 3/4" to max, installation thickness
- 5 1/2" long pull-up diverter spout
- Sweat spout onto 1/2" C.W.T. or thread onto 1/2" IPS
- Touch-Clean° full body shower head is WaterSense° labeled



Commercial Monitor® 13 Series Valve Only Trim

ADA for valve control only

Model Price Finish T13091 88.90 Chrome

- Single-function pressure balance cartridge
- Order MultiChoice[®] Universal rough separately
- Metal lever handle adjusts temperature
- Red/blue indicator
- RP77991 adds 1 3/4" to max. installation thickness



Commercial

Commercial

Model

T13291

Price Finish

Monitor * 13 Series Shower Trim - Less Head

1.75 gpm



Monitor® 13 Series Shower Trim




- Single-function pressure balance cartridge
- Order MultiChoice® Universal rough separately Metal lever handle adjusts temperature
 - Red/blue indicator
- RP77991 adds 1 3/4" to max. installation thickness
- Order shower head separately (LHD)



Commercial Monitor® 13 Series Shower Trim - Less Head

Model Price Finish T13291-SLHD 90.55 Chrome



- Order MultiChoice® Universal rough separately Metal lever handle adjusts temperature
- Red/blue indicator
- RP77991 adds 1 3/4" to max. installation thickness
- Order shower head separately (LHD)



Commercial Monitor® 13 Series Tub & Shower Trim

Price Finish T13491 1.75 gpm 133.90 Chrome





- Single-function pressure balance cartridge • Order MultiChoice® Universal rough separately
- Metal lever handle adjusts temperature
- Red/blue indicator
- RP77991 adds 1 3/4" to max, installation thickness
- 5 1/2" pull-up tub spout
- Sweat spout onto 1/2" C.W.T. or thread onto 1/2" IPS • Touch-Clean° full body shower head is WaterSense° labeled



Commercial



Monitor * 13 Series Tub & Shower Trim - Less Head



Price Finish Model T13491-LHD 119.85 Chrome

ADA for valve control only

- Single-function pressure balance cartridge • Order MultiChoice Universal rough separately
- Metal lever handle adjusts temperature
- Red/blue indicator
- RP77991 adds 1 3/4" to max. installation thickness • 5 1/2" pull-up tub spout
- Sweat spout onto 1/2" C.W.T. or thread onto 1/2" IPS
- Order shower head separately (LHD)



13 Series Shower Trim

Flow

1.5 gpm

Commercial

Model

T13H152

⊘DELTA







Commercial Monitor® 13 Series Tub & Shower Trim - Less Head





Model

Model

T13391

T13491-SLHD



- Single-function pressure balance cartridge
- Order MultiChoice® Universal rough separately
- Metal lever handle adjusts temperature Red/blue indicator
- RP77991 adds 1 3/4" to max, installation thickness

⊘DELTA.

- 5 1/2" pull-up tub spout
- Sweat spout onto 1/2" C.W.T. or thread onto 1/2" IPS
- Order shower head separately (LHD)




Commercial Monitor® 13 Series Valve Only Trim



88.90

Chrome



- Order MultiChoice® Universal push-button rough separately
- Metal lever handle adjusts temperature
- Red/blue indicator
- Push-button diverter
- RP77991 adds 1 3/4" to max. installation thickness



Commercial Monitor® 13 Series Tub & Shower Trim



ADA for valve control only



- Single-function pressure balance cartridge
- Order MultiChoice Universal push-button rough separately
- Metal lever handle adjusts temperature Red/blue indicator
- Push-button diverter
- RP77991 adds 1 3/4" to max. installation thickness
- 4 3/4" metal non-diverter tub spout
- Thread onto 1/2" IPS
- Touch-Clean* full body shower head is WaterSense* labeled



Commercial Monitor® 13 Series Tub & Shower Trim







- Single-function pressure balance cartridge
- Order MultiChoice Universal push-button rough separately
- Metal lever handle adjusts temperature
- Red/blue indicator
- Push-button diverter
- RP77991 adds 1 3/4" to max. installation thickness
- Metal non-diverter tub spout
- SOS = slip-on spout for 1/2" C.W.T. • Removable adapter for 1/2" IPS
- Touch-Clean* full body shower head is WaterSense* labeled



Commercial 13 Series Shower Trim









1.5 gpm



- Vandal resistant lever handle adjusts temperature
- Red/blue indicator
- RP77991 adds 1 3/4" to max, installation thickness Touch-Clean® full body shower head is WaterSense® labeled







Commercial 13 Series Tub & Shower Trim

ADA for valve control only

T13H232



- Single-function pressure balance cartridge
- Order MultiChoice® Universal rough separately
- Vandal resistant lever handle adjusts temperature Red/blue indicator
- RP77991 adds 1 3/4" to max, installation thickness
- 4 3/4" metal pull-up tub spout
- Sweat spout onto 1/2" C.W.T. or thread onto 1/2" IPS
- Touch-Clean® full body shower head is WaterSense® labeled



Commercial 13 Series Tub & Shower Trim





• Order R10700-UNWS MultiChoice® Universal rough separately

• Vandal resistant blade handle adjusts temperature

• 70" vinvl hose

• ADA adjustable mount, hand shower and hose

 ADA compliant grab bar when installed per accessibility guidelines of the act


Touch-Clean® two-setting hand shower is WaterSense®



Price Finish

Chrome

140.35





• Red/blue indicator

• Single-function pressure balance cartridge

• Order MultiChoice Universal rough separately

• 24" long, 1 1/2" stainless slide bar / grab bar

Vandal resistant lever handle adjusts temperature



Model

Commercial

T13H253

13 Series Tub & Shower Trim

Flow

1.5 gpm

Commercial

13 Series Shower Trim



262.25

Price Finish

Chrome

Price Finish

Chrome

308.50



Price Finish

Chrome

330.90



◎ 🖊 🕭



• 30° vandal resistant cast shower head

• Red/blue indicator

• 24" long, 1 1/2" stainless slide bar / grab bar • 70" vinvl hose

ADA adjustable mount, hand shower and hose

• RP77991 adds 1 3/4" to max. installation thickness

• ADA compliant grab bar when installed per accessibility guidelines of the act

• RP77991 adds 1 3/4" to max. installation thickness

 Touch-Clean® two-setting hand shower is WaterSense® labeled

Pause, Full Body Spray







Red/blue indicator

• 24" long, 1 1/2" stainless slide bar / grab bar

• Single-function pressure balance cartridge

• 70" vinyl hose

ADA adjustable mount, hand shower and hose

• ADA compliant grab bar when installed per accessibility guidelines of the act

• RP77991 adds 1 3/4" to max. installation thickness

Pull-up metal diverter spout


• Sweat spout onto 1/2" C.W.T. or thread onto 1/2" IPS Touch-Clean® two-setting hand shower is WaterSense® labeled

• Pause, Full Body Spray









• Touch-Clean° full body shower head is WaterSense° labeled

Pause, Full Body Spray





Commercial TempAssure® 17T Series Shower Trim

TempAssure® 17T Series Shower Trim

1.75 gpm

2.5 gpm

◎ 🖊 🕭

Chrome

Price Finish

Chrome

1431.30

Price Finish

Chrome

434.05

581.15



- Single-function thermostatic cartridge
 - Order MultiChoice® Universal rough separately
 - Vandal resistant handle adjusts volume

• Single-function thermostatic cartridge

Vandal resistant handle adjusts volume

• Dial adjusts temperature

Red/blue indicator

• Order MultiChoice Universal rough separately

• Touch-Clean[®] 3-setting shower head is WaterSense[®]

• Full Body Spray, Massage Spray, Soft-Drench Spray

- Dial adjusts temperature
- Red/blue indicator
- 24" long, 1 1/2" stainless slide bar / grab bar
- 70" vinyl hose
- ADA adjustable mount, hand shower and hose
- ADA compliant grab bar when installed per accessibility
- guidelines of the act
- Touch-Clean* two-setting hand shower
- · Pause, Full Body Spray



6

Commercial Electronic Shower

Commercial

Model

Model

Model

860T178

T17TH155

T17TH125



Model Flow Price Finish 1431.30 860T167 1.5 gpm Chrome



- Recessed metal box mount with pressure balance mixing
- · Electronic shower with push-button activator
- Vandal resistant handle adjusts temperature
- Red/blue indicator
- 30° vandal resistant cast shower head
- Hardwire, order transformer separately
- Hardwire with battery backup, order 061047A; transformer required




Commercial Low Profile Institutional Electronic Shower

1.5 gpm







- Tempered water supplied to solenoid valve
- Field adjustable shower time
- 30° vandal resistant forged shower head is WaterSense° laheled
- Hardwire, order transformer separately
- Hardwire with battery backup, order 061047A; transformer required



Commercial Hand Showers / C43

199.45 Stainless And White

Price Finish



Commercial Adjustable Slide Bar / Grab Bar Assembly

Flow


2.5 gpm



Ġ

Ġ





- · Touch-Clean° spray holes
- Push-button spray selection
- 24" long, 1 1/2" stainless slide bar / grab bar
- ADA adjustable mount, hand shower and hose • ADA compliant grab bar when installed per accessibility guidelines of the act
- 60" 82" stretchable metal hose
- Pause, Full Body Spray



Commercial Adjustable Slide Bar / Grab Bar Assembly



Price Finish Model Flow 219.85 Stainless And White RPW136HDF 2.5 gpm



- Two integral check valves for backflow prevention
- Touch-Clean® spray holes
- Push-button spray selection
- 36" long, 1 1/2" stainless slide bar / grab bar
- ADA adjustable mount, hand shower and hose
- ADA compliant grab bar when installed per accessibility guidelines of the act
- 60" 82" stretchable metal hose
- Pause, Full Body Spray



Commercial Adjustable Slide Bar / Grab Bar Assembly

Model RPW324HDF

Model

Model

RPW124HDF

2.5 gpm

Price Finish 259.45 Stainless And White • Two-setting white hand shower

- Two integral check valves for backflow prevention
- Touch-Clean® spray holes
- Push-button spray selection
- 24" long. 1 1/2" stainless slide bar / grab bar
- ADA adjustable mount, hand shower and hose
- ADA compliant grab bar when installed per accessibility guidelines of the act
- 60" 82" stretchable metal hose
- 90° chrome wall supply elbow
- Pause, Full Body Spray



Commercial Adiustable Slide Bar / Grab Bar Assembly





Ġ

Ġ

Price Finish RPW324HDF-1.5 254.35 Stainless And White 1.5 gpm

- Two-setting white hand shower
- Two integral check valves for backflow prevention • Touch-Clean® spray holes
- Push-button spray selection
- 24" long. 1 1/2" stainless slide bar / grab bar
- ADA adjustable mount, hand shower and hose
- ADA compliant grab bar when installed per accessibility guidelines of the act • 60" - 82" stretchable metal hose
- 90° chrome wall supply elbow
- Pause, Full Body Spray



Commercial Adiustable Slide Bar / Grab Bar Assembly - Less Hand Shower



Price Finish 244.75 Chrome

- 24" long, 1 1/2" stainless slide bar / grab bar ADA adjustable mount and hose
 - ADA compliant grab bar when installed per accessibility guidelines of the act
 - 60" 82" stretchable metal hose
 - 90° chrome wall supply elbow
 - Order hand shower separately (LHD)



Commercial Adjustable Slide Bar / Grab Bar Assembly

Model RPW336HDF

2.5 gpm

Price Finish 280.00 Stainless And White • Two-setting white hand shower

• Two integral check valves for backflow prevention

Touch-Clean® spray holes

Push-button spray selection

• 36" long, 1 1/2" stainless slide bar / grab bar

• ADA adjustable mount, hand shower and hose • ADA compliant grab bar when installed per accessibility

guidelines of the act • 60" - 82" stretchable metal hose

• 90° chrome wall supply elbow

Pause, Full Body Spray

52688

52688-BL

52688-C7

52688-RB

52688-SS

Model

52684

52684-BL

52684-CZ

52684-PN

52684-RB

52684-SS

Model

Model

52638-15-PK

52638-BL15-PK

52638-CZ15-PK

52638-PN15-PK

52638-RB15-PK

52638-SS15-PK

52638-18-PK

52638-BL18-PK

52638-CZ18-PK

52638-PN18-PK

52638-RB18-PK

52638-SS18-PK

(4)

Brilliance® Stainless

Commercial Universal Showering / C45

• 4 1/2" shower head depth



Universal Showering H,Okinetic® 3-Setting Raincan Shower Head

1.75 gpm

1.75 gpm

1.75 gpm

1.75 gpm

1.75 gpm

Price

172.70

267.30

300 50

300.50

267.30

179.10

274.95

306.85

274.95

306.85

274.95

113.95

177.90

190.55

177.90

177.90

Price

113.95

177.90

190.55

177.90

190.55

177.90

Finish

Chrome

Matte Black

Champagne Bronze™

Brilliance® Stainless

Polished Nickel

Venetian Bronze®

Price Finish

Price Finish

Chrome

Matte Black

Champagne Bronze™

Brilliance® Stainless

Polished Nickel

Venetian Bronze®

Chrome

Matte Black

Champagne Bronze™

Brilliance® Stainless

Polished Nickel

Venetian Bronze®

Finish

Chrome

Matte Black

Champagne Bronze

Brilliance® Stainless

Venetian Bronze®



U	

- Three-setting H₂Okinetic* shower head • 7 3/4" spray face
- 3 1/2" shower head depth
- Self-cleaning H₂Okinetic* and Touch-Clean* spray holes
- Lever changes spray settings
- Pause, Full Body Spray, H₂Okinetic PowerDrench Spray



Universal Showering H,Okinetic* 3-Setting Raincan Shower Head

Flow

1.75 gpm

1.75 gpm

1.75 gpm

1.75 gpm

1.75 gpm

1.75 gpm

Flow

1.75 gpm

1.75 gpm

1.75 gpm

1.75 gpm

1.75 gpm

1.75 gpm

1.5 gpm

1.5 gpm

1.5 gpm

1.5 gpm

1.5 gpm

1.5 gpm





- Three-setting H₂Okinetic* shower head
- 7 5/8" square spray face
- 3 1/2" shower head depth
- Self-cleaning H₂Okinetic* and Touch-Clean* spray holes
- Lever changes spray settings
- Pause, Full Body Spray, H₂Okinetic[®] PowerDrench[®] Spray



Universal Showering H, Okinetic * 5-Setting Shower Head








- Five-setting H₂Okinetic* shower head
- 4 3/16" spray face
- 3 1/4" shower head depth
- Self-cleaning H₂Okinetic° and Touch-Clean° spray holes
- Dial changes spray settings
- Pause, Full Body Spray, Full Spray w/Massage, H₂Okinetic[®] PowerDrench® Spray, Massage Spray



Universal Showering H₂Okinetic* 5-Setting Shower Head







- 4 3/16" spray face
- 3 1/4" shower head depth
- Self-cleaning H₂Okinetic* and Touch-Clean* spray holes
- Dial changes spray settings
- Pause, Full Body Spray, Full Spray w/Massage, H₂Okinetic PowerDrench® Spray, Massage Spray







⊘DELTA



RP54752SS

Model

Model

52634-SS18-PK

RP51032

RP51032RB

RP51032SS

Universal Showering



1.5 gpm

1.5 gpm

1.5 gpm

1.5 gpm



Chrome

Venetian Bronze®

Brilliance® Stainless

Brilliance® Stainless

(4)

Price Finish

97.75

136.90

131.80

69.55

99.10

*			

- Single-setting H₂Okinetic* shower head • 4" square spray face
 - 3 1/4" shower head depth
 - Self-cleaning H₂Okinetic[®] spray holes
- H₂Okinetic* PowerDrench* Spray







1.75 gpm




- Five-setting shower head
- 3 3/8" spray face
- 3 5/8" shower head depth
- Touch-Clean® spray holes
- Dial changes spray settings
- Pause, Full Body Spray, Full Spray w/Massage, Fast Massage Spray, High-Efficiency Spray



Universal Showering Premium 5-Setting Shower Head







- 3 5/8" shower head depth
- Touch-Clean® spray holes
- Dial changes spray settings
- Bulk packed
- Pause, Full Body Spray, Full Spray w/Massage, Fast Massage Spray, High-Efficiency Spray

52653-PK

52667-15-BG

52672-18-PK

Model

Model

Model

52171

52171-BL

52171-CZ

52171-SS

52692-15-BG

52672-15-BG

52672-WH18-PK

Universal Showering Fundamentals™ Single-Setting Shower Head

1.5 gpm



Price Finish

29.50 Chrome

Price Finish

62.75 Chrome

Finish

White

Price Finish

Price Finish

Chrome

Finish

Chrome

Matte Black

Champagne Bronze™

Brilliance® Stainless

15.50

Price

275.65

413.45

413.45

385.90

Chrome

36.35

Chrome

36.35

32.25



- Single-setting shower head
- 2 3/4" spray face
- 3" shower head depth
- High-Efficiency Spray



Universal Showering Fundamentals" 6-Jet Adjustable Shower Head

1.5 gpm



- Adjustable spray metal shower head
 - 3" spray face
 - 4" shower head depth
 - Six spray jets
 - Adjustable Full Spray



Universal Showering Fundamentals™ Single-Setting Shower Head

1.75 gpm

1.75 gpm



- Single-setting shower head • 3 3/8" spray face
- 3 3/8" shower head depth • Touch-Clean* spray holes
- Full Body Spray



Universal Showering Fundamentals "Single-Setting Shower Head

1.5 gpm

1.5 gpm








- Single-setting shower head
- 3 3/8" spray face
- 3 3/8" shower head depth
- Touch-Clean® spray holes
- Bulk packed
- Full Body Spray



Universal Showering Fundamentals 3-Setting Shower Head







- 2 5/8" spray face
- 4 1/2" shower head depth
- Bulk packed
- Full Body Spray, Full Spray w/Massage, Fast Massage Spray



Universal Showering H, Okinetic * Single-Setting Metal Raincan Shower Head

1.75 gpm

1.75 gpm

1.75 gpm


1.75 gpm





- Single-setting shower head
 - 6" spray face
 - 2 5/8" shower head depth
 - Self-cleaning H₂Okinetic* spray holes







⊘DELTA.

Universal Showering H, Okinetic *

Model

RP70171

RP70171BL

RP70171CZ

RP70171KS

RP70171RB

RP70171SP

RP70171SS

Model

52175

52175-BL

52175-CZ

52175-SS

Model

RP70175

RP70175BL

RP70175CZ

RP70175RB

RP70175SS

Model

RP70175-15

RP70175-BL15

RP70175-SS15

RP70171-15

RP70171-BL15

RP70171-SS15



Price Finish

Chrome

Matte Black

Champagne Bronze

SpotShield® Stainless

Brilliance® Stainless

Black Stainless

Venetian Bronze®

136.95

191.85

205.50

205.50

205.50

186.15

191.85

Price

136.95

191.85

191.85

Price Finish

Chrome

Finish

Finish

Chrome

Matte Black

Brilliance® Stainless

Chrome

Matte Black

Champagne Bronze

Brilliance® Stainless

Venetian Bronze®

Matte Black

Champagne Bronze Brilliance® Stainless

275.65

413.45

413.45

385.90

Price

129.00

180.80

193.30

193.30

180.80

Price

129.00

180.80

180.80

Finish

Chrome

Matte Black

Brilliance® Stainless



- Single-setting H₂Okinetic* shower head
 - 6" square spray face
 - 2 3/4" shower head depth
 - Self-cleaning H₂Okinetic* spray holes
 - H₂Okinetic[®] PowerDrench[®] Spray



Universal Showering H₂Okinetic* Single-Setting Raincan Shower Head

1.5 gpm

1.5 gpm

1.5 gpm

Single-Setting Raincan Shower Head

1.75 gpm





- Single-setting H₂Okinetic* shower head
 - 6" square spray face • 2 3/4" shower head depth
 - Self-cleaning H₂Okinetic* spray holes H₂Okinetic* PowerDrench* Spray



Universal Showering H2Okinetic® Single-Setting Metal Raincan Shower Head





- Single-setting shower head 6" spray face
- 2 5/8" shower head depth
- Self-cleaning H₂Okinetic* spray holes
- All brass construction
- H₂Okinetic[®] PowerDrench[®] Spray



Universal Showering *H₂Okinetic* Single-Setting Raincan Shower Head*

1.75 gpm





- Single-setting H₂Okinetic* shower head • 5 1/2" spray face
- 2 5/8" shower head depth
- Self-cleaning H₂Okinetic* spray holes
- H₂Okinetic[®] PowerDrench[®] Spray



Universal Showering H₂Okinetic* Single-Setting Raincan Shower Head

1.5 gpm

1.5 gpm

1.5 gpm





- $\begin{array}{l} \bullet \mbox{ Single-setting } \mbox{ H_2Okinetic$^{\circ}$ shower head} \\ \bullet \mbox{ 5 } 1/2" \mbox{ spray face} \end{array}$
- 2 5/8" shower head depth
- Self-cleaning H₂Okinetic* spray holes
- H₂Okinetic[®] PowerDrench[®] Spray

51549

51549-BL

51549-CZ

51549-RB

51549-SS

Model

Model

Model

51599-SSDS

54424-18-PK

54424-BL18-PK

54424-CZ18-PK

54424-RB18-PK

54424-SS18-PK

54424-WC18-PK

54424-BL-PK

54424-CZ-PK

Universal Showering

Universal Showering

Universal Showering

ActivTouch® 9-Setting Slide Bar Hand Shower

1.75 gpm

1.75 gpm

1.75 gpm

1.75 gpm

1.75 gpm

ActivTouch® 9-Setting Shower Mount Hand Shower

Flow

2.5 gpm

2.5 gpm

ActivTouch® 9-Setting Shower Mount Hand Shower

1.75 gpm

1.75 gpm

1.75 gpm

1.75 gpm

1.75 gpm

1.75 gpm

Price

330.20

593.70

680.95

680.95

593 70

Price Finish

Price Finish

Chrome

Matte Black

Champagne Bronze

Brilliance® Stainless

Venetian Bronze®

Chrome / White

130.65

243 90

280.35

280.35

243 90

126.40

Matte Black

Champagne Bronze

243.90

280.35

Finish

Chrome

Matte Black

Champagne Bronze

Brilliance® Stainless

Venetian Bronze®



⊘DELTA

Universal Showering Premium 5-Setting Hand Shower





Universal Showering Premium 5-Setting Hand Shower

Model	Flow	Price	Finish
59434-15-BG	1.5 gpm	57.10	Chrome
59434-SS15-BG	1.5 gpm	82.30	Brilliance® Stainless



- Hand shower only hose NOT included Touch-Clean® spray holes
 - Dial changes spray settings

• Five-setting hand shower

- Bulk packed
- Pause, Full Body Spray, Full Spray w/Massage, Fast Massage Spray, High-Efficiency Spray



Universal Showering Fundamentals 2-Setting Hand Shower

Model	Flow	Price	Finish
59462-B18-PK	1.75 gpm	46.05	Chrome
59462-WHB18-PK	1.75 gpm	33.60	White





- Two-setting hand shower Hand shower only - hose NOT included
- Touch-Clean® spray holes
- Push-button spray selection
- Pause, Full Body Spray



Model	Flow	Price	Finish
59462-B18-PK	1.75 gpm	46.05	Chrome
59462-WHB18-PK	1.75 gpm	33.60	White



Universal Showering Fundamentals 2-Setting Hand Shower

Fundamentals Single-Setting Hand Shower

Flow

1.5 gpm

Universal Showering

Model

Model

59361-PK

59361-SS-PK

59462-WH15-BG

Model	Flow	Price	Finish
59462-B15-BG	1.5 gpm	46.05	Chrome
59462-WHB15-BG	1.5 gpm	33.60	White



③ 🍁 🔈

- Two-setting hand shower
 - Hand shower only hose NOT included
 - Touch-Clean® spray holes
 - Push-button spray selection
 - Bulk packed
 - Pause, Full Body Spray

Single-setting hand shower

• Touch-Clean® spray holes

• Full Body Spray

• Hand shower only - hose NOT included



Universal Showering ActivTouch® 9-Setting Hand Shower

Model Price Finish 2.5 gpm 59424-BL-PK 134.90 Matte Black 59424-CZ-PK 155.05 Champagne Bronze 2.5 gpm



(4)

• Nine-setting hand shower

Nine-setting hand shower

• Touch-Clean® spray holes

Massage, Soft Full Spray

• Nine-setting hand shower

· Touch-Clean® spray holes

Massage, Soft Full Spray

· Nine-setting hand shower Shower arm mount

Touch-Clean® spray holes

Massage, Soft Full Spray

Soft-Touch[®] grip

• 60" - 82" stretchable metal hose

Easy push-button spray selection

• 60" - 82" stretchable metal hose

Easy push-button spray selection

• Pause, Full Body Spray, Full Spray w/Massage, Fast

• Pause, Full Body Spray, Full Spray w/Massage, Fast

Massage Spray, Soft Drench Spray, Shampoo Rinsing

Spray, Soft Drench w/Massage, Shampoo Rinsing Spray w/

Massage Spray, Soft Drench Spray, Shampoo Rinsing

Spray, Soft Drench w/Massage, Shampoo Rinsing Spray w/

Shower arm mount

• Soft-Touch® grip

• Soft-Touch® grip

• 24" long wall bar with adjustable slide

• Pause, Full Body Spray, Full Spray w/Massage, Fast

Massage Spray, Soft Drench Spray, Shampoo Rinsing

Spray, Soft Drench w/Massage, Shampoo Rinsing Spray w/

• 60" - 82" stretchable metal hose

Easy push-button spray selection

- Hand shower only hose NOT included
- Soft-Touch® grip
- Touch-Clean® spray holes
- Easy push-button spray selection
- Pause, Full Body Spray, Full Spray w/Massage, Fast Massage Spray, Soft Drench Spray, Shampoo Rinsing Spray, Soft Drench w/Massage, Shampoo Rinsing Spray w/ Massage, Soft Full Spray


⊘DELTA.



Universal Showering ActivTouch® 9-Setting Hand Shower

◎ ♦ & Price Finish





- Hand shower only hose NOT included
- Soft-Touch® grip
- · Touch-Clean® spray holes
- Easy push-button spray selection
- Pause, Full Body Spray, Full Spray w/Massage, Fast Massage Spray, Soft Drench Spray, Shampoo Rinsing Spray, Soft Drench w/Massage, Shampoo Rinsing Spray w/ Massage, Soft Full Spray



Universal Showering 5-Setting Slide Bar Hand Shower

Model Price Finish 51599-DS 294.25 1.75 gpm Chrome

1.75 gpm



Brilliance® Stainless

- Five-setting hand shower • 24" long wall bar with adjustable slide
 - 60" 82" stretchable metal hose
 - Touch-Clean® spray holes
 - Dial changes spray settings
 - Full Body Spray, Full Spray w/Massage, Fast Massage Spray, Soft Drench Spray, Shampoo Rinsing Spray



Universal Showering Fundamentals 4-Setting Hand Shower

1.75 gpm

1.75 gpm







• Four-setting hand shower Hand shower only - hose NOT included

Spray

- Touch-Clean® spray holes
- · Dial changes spray settings
- Pause, Full Body Spray, Full Spray w/Massage, Massage Spray



519.20

Price

61.20

81.60

Finish

Chrome

Brilliance® Stainless

Universal Showering Fundamentals 4-Setting Slide Bar Hand Shower





Price Finish

White

29.50











• Touch-Clean® spray holes • Dial changes spray settings Pause, Full Body Spray, Full Spray w/Massage, Massage

· Four-setting hand shower

• 24" long wall bar with adjustable slide - wall elbow

56361

Model

51900

51900-RB

51900-SS

56361-SS





Universal Showering Fundamentals " Adjustable Wall Bar



Chrome



- 24" long wall bar with adjustable slide
- Concealed installation screws

Price Finish

102.00

132.60

Price

301.30

436.85

Finish

Chrome

376.65 Brilliance® Stainless

Venetian Bronze®







1.75 gpm

1.75 gpm

1.75 gpm





- Nine-setting hand shower • 24" long, 1 1/4" diameter stainless slide bar / grab bar
 - 60" 82" stretchable metal hose
 - Soft-Touch[®] grip
 - Touch-Clean® spray holes
 - Easy push-button spray selection
 - ADA compliant adjustable mount, hand shower and hose
 - ADA compliant grab bar when installed per accessibility guidelines of the act
 - Pause, Full Body Spray, Full Spray w/Massage, Fast Massage Spray, Soft Drench Spray, Shampoo Rinsing Spray, Soft Drench w/Massage, Shampoo Rinsing Spray w/ Massage, Soft Full Spray



Universal Showering Adjustable Slide Bar / Grab Bar Assembly with Elbow

Model	Flow	Price	Finish
51500	-	264.30	Chrome
51500-RB	-	480.25	Venetian Bronze®
51500-SS	-	429.65	Brilliance® Stainless



- 24" long, 1 1/4" width slide bar / grab bar • 60" - 82" stretchable metal hose
- Hand shower not included
- Wall elbow included
- ADA compliant adjustable mount and hose
- ADA compliant grab bar when installed per accessibility guidelines of the act



Universal Showering Adjustable Slide Bar / Grab Bar Assembly with Elbow





- ullet 24" long, 1 1/4" diameter slide bar / grab bar • 60" - 82" stretchable metal hose
- Hand shower not included
- Wall elbow included
- ADA compliant adjustable mount and hose
- · ADA compliant grab bar when installed per accessibility guidelines of the act



Universal Showering Adjustable Slide Bar / Grab Bar Assembly

Price Finish Model Flow 243.25 56302 Chrome 56302-RB 433 80 Venetian Bronze® 56302-SS Brilliance® Stainless 379.55



- 24" long, 1 1/4" diameter slide bar / grab bar
- 60" 82" stretchable metal hose
- Hand shower not included
- ADA compliant adjustable mount and hose
- · ADA compliant grab bar when installed per accessibility guidelines of the act



Universal Showering Adjustable Slide Bar / Grab Bar 2-Setting Hand Shower


Price Finish Model Flow 240.40 52001-DS 2.5 gpm White



- Two-setting hand shower
 - 24" long, 1 1/2" diameter stainless slide bar / grab bar • 60" - 82" stretchable metal hose
 - Touch-Clean® spray holes
 - Push-button spray selection
 - ADA compliant adjustable mount, hand shower and hose ADA compliant grab bar when installed per accessibility
- guidelines of the act
- Pause, Full Body Spray



Commercial *Universal Showering /* C51



Adjustable Slide Bar / Grab Bar 2-Setting Hand Shower

Price 218.15 White



- Two-setting hand shower 24" long, 1 1/2" diameter stainless slide bar / grab bar
- 70" UltraFlex® hose
- Touch-Clean® spray holes
- Push-button spray selection
- ADA compliant adjustable mount, hand shower and hose
- ADA compliant grab bar when installed per accessibility guidelines of the act
- Pause, Full Body Spray



Universal Showering Adjustable Slide Bar / Grab Bar 2-Setting Hand Shower

Model Flow Price Finish 52002-DS 2.5 gpm 245.90 White



- Two-setting hand shower
- 24" long. 1 1/2" diameter white slide bar / grab bar
- 60" 82" stretchable metal hose
- Touch-Clean® spray holes
- Push-button spray selection
- ADA compliant adjustable mount, hand shower and hose • ADA compliant grab bar when installed per accessibility
- guidelines of the act
- Pause, Full Body Spray



Universal Showering Adjustable Slide Bar / Grab Bar 2-Setting Hand Shower

Model Flow Price Finish 52003-DS 266.85 White 2.5 gpm



- Two-setting hand shower
- 36" long, 1 1/2" diameter stainless slide bar / grab bar • 60" - 82" stretchable metal hose
- Touch-Clean® spray holes
- Push-button spray selection
- ADA compliant adjustable mount, hand shower and hose • ADA compliant grab bar when installed per accessibility guidelines of the act
- Pause, Full Body Spray



Universal Showering Adjustable Slide Bar / Grab Bar 2-Setting Hand Shower

Price Finish Model 52003-UF 2.5 gpm 245.90 White



- Two-setting hand shower 36" long, 1 1/2" diameter stainless slide bar / grab bar
- 70" UltraFlex® hose
- Touch-Clean® spray holes
- Push-button spray selection
- ADA compliant adjustable mount, hand shower and hose • ADA compliant grab bar when installed per accessibility guidelines of the act
- Pause, Full Body Spray



Universal Showering ADA Grab Bar Hand Shower Mount





- Fits 1 1/2" or 1 1/4" round grab bars Installs vertically or horizontally
- Rotatable hand shower mount



Universal Showering ADA Grab Bar Hand Shower Mount

Model Price Finish U6500 44.90 Chrome U6500-BL 54.50 Matte Black U6500-CZ 58.20 Champagne Bronze U6500-RB 58.20 Venetian Bronze® U6500-SS 54 50 Brilliance® Stainless



- Fits 1 1/2" or 1 1/4" round grab bars • Fits 1 1/4" width square grab bars
- Installs vertically or horizontally
- Rotatable hand shower mount
- Finished surfaces to coordinate with grab bars



Ė

Tri-universal adapter

included - RP100154

• Thread onto 1/2" or 3/4" IPS

Metal



- Sweat onto 1/2" C.W.T. • Thread onto 1/2" IPS
- Slip onto 1/2" C.W.T

Model Price Finish RP93273 131.05 Chrome RP93273BL 158.35 Matte Black RP93273SS 158.35 Brilliance® Stainless



Diverter Tub Spout

- Pull up to divert
- 5 1/2" total length Thread onto 1/2" IPS

Model Price Finish RP19895 52.10 Chrome



Model

U1011-PK

Universal Showering Diverter Tub Spout

 Pull up to divert • 6 1/2" total length

• Slip onto 1/2" C.W.T.

Price Finish

75.15 Chrome



Universal Showering Diverter Tub Spout

 Pull up to divert • 5 1/4" total length • Slip onto 1/2" C.W.T.

• Thread onto 1/2" or 3/4" IPS Metal

Metal

• Threads in nose of spout

Model Price Finish U1075-PK 39.20 Chrome

U1075-PB-PK 61.35 Brilliance® Polished Brass

See pages CI and CII for icon definitions. ASME A112.18.1/CSA B125.1

ADA Grab Bar



⊘DELTA

- 18" long
- 1 1/2" diameter
- 1 1/2" wall clearance • Supports up to 500 pounds when properly installed
- Meets ADA standards
- Snap lock covers 20 gauge
 - - Mounting hardware included • Overall size 21" x 3" x 3"

• Grab bar - 18 gauge

• 3" diameter flanges - 14

Ė

Ġ

Model Price Finish 40118-PS 36.50 Peened Stainless Steel 40118-SS 28.10 Brilliance® Stainless

Ġ Concealed mounting • Type 304 stainless steel

40124

40124-PS

40124-SS

ADA Grab Bar • 24" long

Brilliance® Stainless

Concealed mounting

- 1 1/2" diameter • Type 304 stainless steel • 1 1/2" wall clearance • Grab bar - 18 gauge
- Supports up to 500 lbs when 3" diameter flanges 14 properly installed Meets ADA standards • Snap lock covers - 20 gauge
 - Mounting hardware included
 - Overall size 27" x 3" x 3"

Ė

Ġ

Ė

Ġ

Price Finish 42.20 Chrome 42.20 Peened Stainless Steel



Price

36.40

Finish

Model

Model

40142-PS

40142-SS

Model

41124

Model

41136-SS

41124-SS

40130-SS

ADA Grab Bar

- 30" long
- 1 1/2" diameter
- 1 1/2" wall clearance

Brilliance® Stainless

- Supports up to 500 pounds when properly installed
 - 3" diameter flanges 14
 - Snap lock covers 20 gauge

Meets ADA standards

Concealed mounting

• Grab bar - 18 gauge

Type 304 stainless steel

• Mounting hardware included • Overall size 33" x 3" x 3"

31.30

Model Price Finish 53.30 Peened Stainless Steel 40136-SS 37.75 Brilliance® Stainless

ADA Grab Bar

- 36" long Meets ADA standards Concealed mounting
- 1 1/2" diameter • 1 1/2" wall clearance
- Type 304 stainless steel • Supports up to 500 pounds • Grab bar - 18 gauge • 3" diameter flanges - 14 when properly installed
 - Snap lock covers 20 gauge
 - Mounting hardware included
 - Overall size 39" x 3" x 3"





- 42" long • 1 1/2" diameter
- 1 1/2" wall clearance
- Supports up to 500 pounds
- Grab bar 18 gauge when properly installed • 3" diameter flanges - 14
 - Snap lock covers 20 gauge Mounting hardware included • Overall size 45" x 3" x 3"

Concealed mounting

• Type 304 stainless steel

ADA Grab Bar • 48" long

• 1 1/2" diameter

Brilliance® Stainless

- 1 1/2" wall clearance
- Supports up to 500 pounds when properly installed
- Type 304 stainless steel • Grab bar - 18 gauge • 3" diameter flanges - 14

• Overall size 51" x 3" x 3 "

Meets ADA standards

Concealed mounting

gauge • Snap lock covers - 20 gauge Mounting hardware included

Brilliance® Stainless

Ė



Price

40.75

28.05

Price

33.90

Finish

Chrome

Brilliance® Stainless

Price

58.55

40.85

Finish

Peened Stainless Steel

- 1 1/4" diameter
- 1 1/2" wall clearance
- Supports up to 500 lbs when Grab bar 18 gauge properly installed
- Meets ADA standards Concealed mounting • Type 304 stainless steel
 - 3" diameter flanges 14
 - Snap lock covers 20 gauge Mounting hardware included
 - Overall size 27" x 3" x 2 3/4"

Ġ



40148-SS

• 30" long

Price Finish

30.00

Price

37.20

Finish

Brilliance® Stainless

Finish

Price

48.90

• 1 1/4" diameter • 1 1/2" wall clearance • Supports up to 500 pounds

ADA Grab Bar

- Type 304 stainless steel • Grab bar - 18 gauge • 3" diameter flanges - 14 when properly installed
 - Snap lock covers 20 gauge

Meets ADA standards

Concealed mounting

 Mounting hardware included • Overall size 33" x 3" x 2 3/4"



ADA Grab Bar

• 36" long • 1 1/4" diameter

Brilliance® Stainless

- 1 1/2" wall clearance • Supports up to 500 pounds
- when properly installed
- Meets ADA standards
- Concealed mounting • Type 304 stainless steel • Grab bar - 18 gauge
- 3" diameter flanges 14
 - Snap lock covers 20 gauge Mounting hardware included Overall size 39" x 3" x 2 3/4"



41130-SS

41142-SS

ADA Grab Bar

Brilliance® Stainless

- 42" long
- 1 1/4" diameter • 1 1/2" wall clearance
- Supports up to 500 pounds when properly installed
 - Grab bar 18 gauge • 3" diameter flanges - 14

Meets ADA standards

Concealed mounting

• Type 304 stainless steel

- Snap lock covers 20 gauge
- Mounting hardware included
- Overall size 45" x 3" x 2 3/4"

See pages CI and CII for icon definitions.

Finish

ADA Grab Bar

- 18" long
- 1 1/4" diameter • 1 1/2" wall clearance
- Supports up to 500 lbs when 3 1/16" diameter decorative properly installed
- Meets ADA standards
- Model Price Finish 41218 51.15 Chrome 41218-SN 51.15 Satin Nickel



- Concealed mounting • Type 304 stainless steel
- Grab bar 18 gauge
- flanges 14 gauge • Designer step style snap lock covers - 20 gauge
- Mounting hardware included

Supports up to 500 pounds

when properly installed

• Overall size 15" x 3" x 3"

L FP

E (FP)

₹ FP

 Overall size 21" x 3 1/16" x 2 3/4"

41224-SN

ADA Grab Bar

- 24" long
 - 1 1/4" diameter
 - 1 1/2" wall clearance • Supports up to 500 pounds
 - when properly installed Meets ADA standards

57.05

Finish

Satin Nickel

• Designer step style snap lock covers - 20 gauge Mounting hardware included

Concealed mounting

• Grab bar - 18 gauge

flanges - 14 gauge

Type 304 stainless steel

• 3 1/16" diameter decorative

- Overall size 27" x 3 1/16"
- x 2 3/4"



41612-SS

Model

41624

41624-RI

41624-CZ

41624-PN

41624-RB

41624-SS

Model

41642

41642-PN

41642-RB

41642-SS

41718

41718-BL

41718-CZ

41718-RB

41718-SS

12" Traditional Decorative ADA Grab Bar

• 1 1/4" diameter

- 1 1/2" wall clearance
- Extends 3" from wall Mounting hardware included Concealed mounting Grab bar wall anchor included
- 3" diameter flanges
- Model Price Finish 41612 105.30 Chrome 41612-BI 125 25 Matte Black 41612-CZ 152.50 Champagne Bronze 41612-PN 131.55 Polished Nickel 41612-RB 152 50 Venetian Bronze

131.55

Price

Chrome

Matte Black

Polished Nickel

154.15 Brilliance® Stainless

Venetian Bronze

Champagne Bronze

123 30

146 80

178.85

154 15

178.85

208 60

241.95

Price

112.05

140.05

162.45

140.05

See pages CI and CII for icon definitions

18" Traditional Decorative ADA Grab Bar

- L FP
- 1 1/4" diameter • 1 1/2" wall clearance • Extends 3" from wall
- Concealed mounting • 3" diameter flanges
- Model Price 41618 112.05 Chrome Matte Black 41618-BI 133 35 41618-CZ 162.45 Champagne Bronze 41618-PN 140.05 Polished Nickel 41618-RB 162 45 Venetian Bronze 41618-SS 140.05 Brilliance® Stainless

- Mounting hardware included Grab bar wall anchor
- included
- Supports up to 500 pounds
- when properly installed • Overall size 21" x 3" x 3"



24" Traditional Decorative ADA Grab Bar

• 1 1/4" diameter

Brilliance® Stainless

- Extends 3" from wall
- Concealed mounting
- Grab har wall anchor • 3" diameter flanges included
 - Supports up to 500 pounds when properly installed

• 1 1/2" wall clearance

Mounting hardware included

• Overall size 27" x 3" x 3"

• 1 1/2" wall clearance

Grab bar wall anchor

• Supports up to 500 pounds

when properly installed

• Overall size 45" x 3" x 3"

included



- 41636 141.40 Chrome 41636-BL Matte Black 168.35 41636-CZ 205.05 176.75 41636-PN Polished Nickel 41636-RB 205.05 Venetian Bronze 41636-SS 176.75 Brilliance® Stainless

36" Traditional

- Concealed mounting
- Model Price Finish

Decorative ADA Grab Bar

- Extends 3" from wall
- 3" diameter flanges
- Champagne Bronze

• 1 1/2" wall clearance Mounting hardware included

- Grab bar wall anchor
- included
- Supports up to 500 pounds when properly installed
- Overall size 39" x 3" x 3"



42" Traditional Decorative ADA Grab Bar

- 1 1/4" diameter
- Extends 2 3/4" from wall
- Concealed mounting • 3" diameter flanges
- Price Finish 166 90 Chrome 41642-BL 198.65 Matte Black 41642-CZ 241.95 Champagne Bronze

208.60 Brilliance® Stainless

Chrome

162.45 Venetian Bronze®

Matte Black

Champagne Bronze

Brilliance® Stainless

Mounting hardware included

12" Transitional

- 1 1/4" diameter • Extends 3 3/8" from wall
- Concealed mounting3"
- diameter flanges
- Model Price Finish 41712 105.30 Chrome 41712-BL 131.55 Matte Black 41712-CZ 152.50 Champagne Bronze 41712-RB 152 50 Venetian Bronze® 41712-SS 131.55 Brilliance® Stainless

Decorative ADA Grab Bar

- 1 1/2" wall clearance Mounting hardware included
- Grab bar wall anchor included
- Supports up to 500 pounds when properly installed
- Overall size 15" x 3" x 3 3/8"



Polished Nickel

Venetian Bronze



- Mounting hardware included Extends 3 3/8" from wall · Grab bar wall anchor • Concealed mounting3" included
- diameter flanges Supports up to 500 pounds when properly installed • 1 1/2" wall clearance
 - Overall size 21" x 3" x 3 3/8"



41724

41724-BL

41724-CZ

41724-RR

41724-SS

Price

Chrome

Matte Black

Venetian Bronze®

Brilliance® Stainless

123.30

154.15

178.85

178 85

154.15

- 1 1/4" diameter • Extends 3 3/8" from wall
- Concealed mounting3" diameter flanges
- 1 1/2" wall clearance
- Champagne Bronze

24" Transitional Decorative ADA Grab Bar

- Mounting hardware included Grab bar wall anchor
- included • Supports up to 500 pounds when properly installed

• Overall size 27" x 3" x 3 3/8"	

Decorative ADA Grab Bar

36" Transitional

• 1 1/2" wall clearance

12" Contemporary

• Extends 2 3/4" from wall

• 3 1/2" diameter flanges

• 1 1/2" wall clearance

Concealed mounting

• 1 1/4" diameter

Decorative ADA Grab Bar

Finish

Chrome

Matte Black

Champagne Bronze

Brilliance® Stainless

Venetian Bronze

Price

141.40

176.75

205.05

205.05

176.75

Price

105.30

131.55

152 50

152.50

131.55

⊘DELTA.

Model

41736

41736-BL

41736-C7

41736-RB

41736-SS

Model

41812

41812-BL

41812-C7

41812-RB

41812-SS

Model

41824

41824-BL

41824-CZ

41824-RB

41824-SS

Model

41842

41842-RI

41842-CZ

41842-PN

41842-RB

41842-SS

Model

41918

41918-RI

41918-CZ

41918-PN

41918-RR

41918-SS



E FP

E FP

长 FP

E FP

- 1 1/4" diameter Mounting hardware included
- Extends 3 3/8" from wall Grab bar wall anchor
- Concealed mounting3" included diameter flanges
 - Supports up to 500 pounds when properly installed
 - Overall size 39" x 3" x 3 3/8"

Mounting hardware included

• Supports up to 500 pounds

• Overall size 15 1/2" x 3 1/2"

when properly installed

Grab har wall anchor


included

x 2 3/41

included



Decorative ADA Grab Bar



42" Transitional

• 1 1/2" wall clearance

- Concealed mounting • 3" diameter flanges
- Grab bar wall anchor Supports up to 500 pounds

included

when properly installed
• Overall size 45" x 3" x 3 3/8"

• Mounting hardware included

よ(FP)

- Ovciali .	3126 43	ΛJ	V 0 0



Finish

Price

18" Contemporary Decorative ADA Grab Bar



diameter flanges

Model	Price	Finish
41818	112.05	Chrome
41818-BL	140.05	Matte Black
41818-CZ	162.45	Champagne Bronze
41818-RB	162.45	Venetian Bronze®

- 1 1/4" diameter
- Extends 2 3/4" from wall • Concealed mounting 3 1/2"
- 1 1/2" wall clearance

Model	Price	Finish
41818	112.05	Chrome
41818-BL	140.05	Matte Black
41818-CZ	162.45	Champagne Bronze
41818-RB	162.45	Venetian Bronze®

1818	112.05	Chrome
1818-BL	140.05	Matte Black
1818-CZ	162.45	Champagne Bronze
1818-RB	162.45	Venetian Bronze®
1818-SS	140.05	Brilliance® Stainles

included Supports up to 500 pounds when properly installed

Grab bar wall anchor

Mounting hardware included

• Overall size 21 1/2" x 3 1/2"

E FP

x 2 3/4"



Finish

Chrome

Matte Black

Champagne Bronze™

Brilliance® Stainless

Venetian Bronze®

- Mounting hardware included Grab bar wall anchor
- Extends 2 3/4" from wall • Concealed mounting 3 1/2" diameter flanges
- 1 1/2" wall clearance

42" Contemporary

• Extends 2 3/4" from wall

• 3 1/2" diameter flanges

18" Angular Modern

• Extends 2 3/4" from wall

Concealed mounting

• 3" square flanges

Decorative ADA Grab Bar

Concealed mounting

• 1 1/4" diameter

Decorative ADA Grab Bar

- Price Finish Chrome Matte Black
- 123.30 154.15 178.85 Champagne Bronze 178.85 Venetian Bronze® 154.15 Brilliance® Stainless

• Overall size 27 1/2" x 3 1/2" x 2 3/4"

• 11/2" wall clearance

Grab bar wall anchor

included

x 2 3/4

Mounting hardware included

Supports up to 500 pounds

• Overall size 45 1/2" x 3 1/2"

when properly installed

• 1 1/2" wall clearance

Grab bar wall anchor

included


Mounting hardware included

Supports up to 500 pounds

• Overall size 21" x 3" x 2 3/4"

when properly installed

Supports up to 500 pounds



41836-SS

• 1 1/4" diameter • Mounting hardware included • Extends 2 3/4" from wall • Grab bar wall anchor

36" Contemporary

Decorative ADA Grab Bar

- 1 1/2" wall clearance
- 205.05

included Concealed mounting • Supports up to 500 pounds • 3 1/2" diameter flanges when properly installed

x 2 3/4"

• Overall size 39 1/2" x 3 1/2"

ie	
Black	
pagne Bronze [™]	
an Bronze®	

Veneti Brilliance® Stainless 12" Angular Modern



• 1 1/2" wall clearance Mounting hardware included Grab bar wall anchor

included

Supports up to 500 pounds

• Overall size 15" x 3" x 2 3/4"

when properly installed

Price Finish Chrome Matte Black Champagne Bronze


• 1 1/4" width • Extends 2 3/4" from wall

- Concealed mounting • 3" square flanges
- Model 41912 105.30 41912-BL 131.55 41912-CZ 152 50 41912-PN 131.55 Polished Nickel 41912-RB 152.50 Venetian Bronze 41912-SS 131.55 Brilliance® Stainless

176.75



24" Angular Modern • 1 1/4" width



	• 3"	square	tianges
Fini	sh		

Model	Price	Finish
41924	123.30	Chrome
41924-BL	154.15	Matte Black
41924-CZ	178.85	Champagne Bror
41924-PN	154.15	Polished Nickel
41924-RB	178.85	Venetian Bronze®
41924-55	154 15	Brilliance® Stainl

- Decorative ADA Grab Bar

- nze 41924-SS 154.15 Brilliance Stainless

- よ (FP)
- included • Supports up to 500 lbs when properly installed

Mounting hardware included

• Overall size 27" x 3" x 2 3/4"

• 1 1/2" wall clearance

Grab bar wall anchor

140.05 See pages CI and CII for icon definitions.

Price

112.05

140 05

162.45

140.05

162 45

Finish

Chrome

Matte Black

Champagne Bronze

Brilliance® Stainless

Polished Nickel

Venetian Bronze

Price

166.90

208 60

241.95

208.60

241 95

208.60

Finish

Chrome

Matte Black

Champagne Bronze

Brilliance® Stainless

• 1 1/4" width

Polished Nickel

Venetian Bronze



C56 / Commercial Grab Bars



Mounting hardware included

Supports up to 500 pounds

when properly installed
• Overall size 45" x 3" x 2 3/4"

Grab bar wall anchor

included



36" Angular Modern Decorative ADA Grab Bar



- 1 1/4" width
- Extends 2 3/4" from wall Concealed mounting
- 3" square flanges
- 1 1/2" wall clearance

Model	Price	Finish
41936	141.40	Chrome
41936-BL	176.75	Matte Black
41936-CZ	205.05	Champagne Bronze™
41936-PN	176.75	Polished Nickel
41936-RB	205.05	Venetian Bronze®
41936-SS	176.75	Brilliance® Stainless

See pages CI and CII for icon definitions.



- Mounting hardware included Grab bar wall anchor
- Supports up to 500 pounds when properly • Overall size 39

included

y installed	
9" x 3" x 2 3/4"	



- Decorative ADA Grab Bar
 - 1 1/4" width
 - Extends 2 3/4" from wall Concealed mounting

42" Angular Modern

• 3" square flanges • 1 1/2" wall clearance

Model	Price	Finish
41942	166.90	Chrome
41942-BL	208.60	Matte Black
41942-CZ	241.95	Champagne Bronze™
41942-RB	241.95	Venetian Bronze®
41942-SS	208.60	Brilliance® Stainless



⊘DELTA Commercial Public Washroom / C57



Liquid Soap Dispenser

- Brass basin mounted liquid Adjust up to 3" max. counter soap dispenser thickness
- 32 oz. capacity polyethylene Mounting hardware included container
- 4" spout

Finish

Chrome

Model Price 44000 62.70



Recessed Paper Holder

- Stainless steel recessed Plastic spring activated paper holder with plastic
- Overall size 6 1/4" x 6 1/4" • Polished stainless steel shell x 3 3/4"



Price Finish 17.00 Chrome



25.55

Model

45470

Model

44970

Model

45272

Recessed Extra Roll Paper Holder

- Stainless steel recessed
- extra roll paper holder Plastic spring activated roller
- Spare roll stored in back
- Price Finish

Chrome



Recessed Paper Holder

- Brass recessed paper holder Beveled edges with brass roller Solid brass shell
 - Overall size 6 1/4" x 6 1/4"
 - x 3 3/4"
- Brass spring activated roller

Price Finish Model 45072 39.00 Chrome



Recessed Twin Paper Holder

- Plastic spring activated Bright stainless steel recessed twin paper holder rollers
- Polished stainless steel Horizontal mounting frame - 14 gauge
 - Overall size 12 5/8" x 6 1/4" x 3 3/4"

• Recessed box - 25 gauge

• Overall size 6 7/16" x 6

galvanized steel

7/16" x 6 15/16"



Twin Paper Holder

- Twin paper holder with two plastic rollers • Chrome-plated zamak posts 3 3/8"
- Plastic spring activated
- rollers

Model 45270 24.40

Twin Paper Holder



- Twin paper holder with brass Horizontal mounting
- rollers • Overall size 13 1/2" x 2" x
- Chrome-plated zamak posts 3 3/8" Brass spring activated
- rollers

Price Finish 27.30 Chrome

Price Finish

Chrome

37.20

 Horizontal mounting • Overall size 13 1/2" x 2" x

Price Finish





C58 / Commercial Public Washroom / Shelving





Double Roll Deluxe Paper Holder

- Double roll deluxe paper holder
- Concealed push button hinge release
- Heavy-duty chrome-plated

Price Finish 45362 26.00 Chrome



• Overall size 10 7/16" x 2 7/16" x 4 1/4"



Recessed Vanity Tissue Cabinet

 Galvanized steel recessed vanity tissue cabinet

Price Finish

14.00

- is required
- For use when no tissue cover Recessed box and door 23
 - gauge galvanized steel • Overall size 11 3/4" x 5 1/4" x 2 1/8"

Spring loaded for easy tissue

box replacement



Recessed Wall Clamp

- · Recessed wall clamp
- For conventional type installations
- Use when backing/framing is not available
- Price Finish

7.45 Chrome

• Use for chrome and stainless

steel recessed items • Steel bracket - 20 gauge

Zinc plated



Model

46090

Towel Shelf

- 18" towel shelf with one bar
- Stainless steel
- Concealed mounting
- Wall flange 17 gauge brass Mounting hardware included

• Overall size 20 1/2" x 8 1/2" • Shelf and towel bar tubing - x 9 7/8"

127.55 Chrome

Model



Towel Shelf

- 24" brass towel shelf with one bar
- Stainless steel
- Concealed mounting
- Shelf and towel bar tubing x 9 7/8" 3/4" stainless steel

Price Finish 43024 131.35 Chrome



- Mounting hardware included
- Overall size 26 1/8" x 8 1/2"



Model

43224-SN

150.05

Price Finish

Chrome

76.90

Towel Shelf

- 24" towel shelf with one bar Shelf and towel bar tubing -Stainless steel
- Concealed mounting
- Decorative beveled flanges
- 3/4" brass
- Seamless drawn tubing
 - Mounting hardware included • Overall size 26 1/2" x 8 1/2"

Price Finish



Price Finish

157.50 Chrome

Towel Shelf

- 24" towel shelf with two bars 3/4" brass
- Stainless steel
- Concealed mounting
- Overall size 26 1/2" x 8 1/2"
- Wall flange 17 gauge brass x 9 7/8"
- Shelf and towel bar tubing -



• Mounting hardware included



Model

43618

Towel Shelf

Satin Nickel

- 18" towel shelf with one bar Stainless steel
- Pre-assembled Shelf and shower bar - 3/4"
- Exposed mounting
- 304 stainless steel tubing

• Overall size 20 1/8" x 8 1/2"



Model

43424

Towel Shelf

- 24" towel shelf with one bar
- Stainless steel
- Exposed mounting
- Shelf and towel bar tubing 3/4" 304 stainless steel

Pre-assembled

• Overall size 26 1/8" x 8 1/2" x 9 7/8"

Price Finish 43624 79.50 Chrome 43624-SN 86.75 Satin Nickel



Small Corner Caddy

- caddy
- Stainless steel small corner Mounting hardware included • Overall size 6 9/32" x 1 13/32" x 5 3/32"

Model Price Finish 47000 19.80 Chrome



47100

Model

42205

42205-SS

Commercial Shelving / Shower Rods / C59



Price Finish

Chrome

24.05

Price

40.35

38.50

Finish

Large Corner Caddy

- Stainless steel large corner Mounting hardware included
 - Overall size 9 9/32" x 1 7/16" x 6 9/32"



Shower Rod

- 6' long • 1 1/4" diameter
- Concealed mounting
- 3" wall flanges 14 gauge
- Snap lock cover flanges 20 gauge

• 304 polished stainless steel

Price Finish 42006 55.60 Chrome

Price

42.35

42206

42206-SS

Finish

Chrome

40.35 Brushed Stainless Steel



- Adjustable shower rod
- 5' long
- 1" diameter
- Concealed mounting

Brushed Stainless Steel

• Solid brass spring pin design replaces set screw Eliminates need to tighten

• 6" bow

product Mounting hardware included

• 304 stainless steel tubing

• Oval design prevents

rotation and wet floors

Curved Shower Rod

- Adjustable shower rod
- 6' long
- 1" diameter Concealed mounting
 - Oval design prevents rotation and wet floors • Solid brass spring pin

• 6" bow

design replaces set screw

• 304 stainless steel tubing

- Eliminates need to tighten product
- Mounting hardware included





Ġ

Ġ



Grid Strainer

- 1 1/4" grid strainer
- Overflow holes · Cast brass body



Grid Strainer - Less Overflow Holes

- 1 1/4" grid strainer
- · Cast brass body
- · Less overflow holes

Model 33T260 Price 23.30 Finish Chrome



Price 27.45 Finish Chrome



Grid Strainer - Less Overflow Holes

· Hooded open grid strainer

Cast brass body

- Removable hooded drain cover for splash reduction





Grid Strainer

- Offset grid strainer
- Cast brass body
- Overflow holes

Model 33T260-1DC

Price 73.05 Finish Chrome



Price 43.75 Finish Chrome





Grid Strainer - Less Overflow Holes

· Offset grid strainer Cast brass body

· Less overflow holes

Ġ



Grid Strainer - Less Overflow Holes

- · Hooded open offset grid
- Cast brass body

strainer

- · Removable hooded drain cover for splash reduction
- Less overflow holes

Model 33T290-1 Price 48.00 Finish Chrome



33T290-1DC 93.00

Finish Chrome



Adjustable P-trap with Cleanout

- Adjustable P-trap with cleanout · Cast brass waste bend
- Slip joint coupling nuts
 - Deep, brass wall flange
 1 1/4" size



Adjustable P-trap with Cleanout

- · Adjustable P-trap with cleanout
- · Cast brass waste bend
- Slip joint coupling nuts
- Deep, brass wall flange
 1 1/2" size

Model 33T311 Price 52.10 Finish Chrome Model 33T360

Price 64.40

Finish Chrome





Model Options

The Delta' brand is known for its depth of commercial products that meet any project requirement. This section of the price book allows you to configure the product to your specific needs. It's all up to you—cartridge, spout, outlet, handle—you select it, we build it. It doesn't get any better. And to top it off, we continue to support you by listing some of the most popular selling models within a series, along with a supplemental product list, rough-in, trim and add-on options. The Delta brand has the solutions to meet your current and future needs.

Please always order in full case. Delta Commercial Technical Service 1-877-509-2680.

Online Catalogs: www.deltacommercialfaucets.com (Core products ONLY).

www.specselect.com (Complete Product Offering & Part Numbering System)

T13H153-25

Variation

1 = Shower valve 2 = Tub & shower valve

3 = Shower valve with diverter for dual showers

with pull-up diverter tub spout

Shower

0 = No shower head

- 2 = 3-setting Touch-Clean* shower head/arm/flange
- 3 = Shower head/arm/flange with Touch-Clean® spray holes
- 5 = Hand shower with 24" SS grab bar and ADA slide
- $6 = 30^{\circ} \text{ VR}$ wallmount shower head
- 8 = Shower head/arm/flange with H₂Okinetic* Technology

Options/Add-Ons

2 = 3.33" (85 mm) metal lever 3 = 2.24" (57 mm) lever blade

See page C66 for Multichoice® Universal roughs.

Handle

05 = 36" SS grab bar, replacing 24" bar

20 = 69 - 92" stretchable SS hose, replacing vinyl hose

25 = 36" SS grab bar

AND 69 - 92" stretchable SS hose, replacing replacing 24" bar

How To Order a Complete MultiChoice® T13H Series Tub/Shower Faucet



Complete Faucet



MultiChoice® Universal rough R10000-UNWS or R10700-UNWS



Trim-Select desired trim



T13H1 Shower Valve Only - Metal Lever Handle

Model	
T13H102	

Flov Ė N/A

Price Finish 95.05 Chrome

Single function pressure balance cartridge

- Order MultiChoice® Universal rough separately
- Vandal resistant lever handle adjusts temperature
- Red/blue indicator



T13H1 Shower Valve with 3-Setting Touch-Clean® Shower Head – Metal Lever Handle

Model T13H122

Flow

も (6.6 L/min)

Price Finish 161.40 Chrome

- Single function pressure balance cartridge
- Order MultiChoice Universal rough separately
- Vandal resistant lever handle adjusts temperature
- Red/blue indicator
- Touch-Clean® 3-setting shower head is WaterSense® labeled
- Full Body Spray, Massage Spray, Soft Drench Spray
- Includes arm and flange



T13H1 Shower Valve with Touch-Clean® Shower Head — Metal Lever Handle

Model T13H132



(5.7 L/min)

118.00 Chrome

- Single function pressure balance cartridge
- Order MultiChoice® Universal rough separately
- Vandal resistant lever handle adjusts temperature
- Red/blue indicator
- Touch-Clean® full body shower head is WaterSense® labeled
- Includes arm and flange



T13H1 Shower Valve with Hand Shower, SS Bar, ADA Slide – Metal Lever Handle

Model		Flow	Price	Finish
T13H152	<u>&</u>	1.5 gpm (5.7 L/min)	308.50	Chrome
T13H152-05*	<u>L</u>	1.5 gpm (5.7 L/min)	327.40	Chrome
T13H152-20*	<u></u>	1.5 gpm (5.7 L/min)	344.50	Chrome
T13H152-25*	<u></u> &	1.5 gpm (5.7 L/min)	363.40	Chrome

*Refer to Model Number Example for Options/Add-Ons

- Single function pressure balance cartridge
- Order MultiChoice® Universal rough separately Vandal resistant lever handle adjusts
- temperature
- Red/blue indicator
- 24" long, 1-1/2" stainless slide bar/grab bar
- ADA adjustable mount Hand shower and 70" vinyl hose
- ADA compliant grab bar when installed per
- accessibility guidelines of the act • Touch-Clean* 2-setting hand shower is WaterSense® labeled
- Pause, Full Body Spray
- Valve rating is 1.2 GPM minimum (4.5 L/min) for 13, 14, 17 series pressure-balance and 17T series thermostatic at 45 psi (310kPa). Stated flow rate for shower heads @80 psi maximum water usage. ASME A112.1016/ASSE 1016/CSA B125.16

DELTA COMMERCIAL TECHNICAL SERVICE 1-877-509-2680 ONLINE CATALOGS: www.deltacommercialfaucets.com (Core products ONLY) www.specselect.com (Complete Product Offering & Part Numbering System)



⚠ DELTA

T13H1 Shower Valve with 30° VR Wallmount Shower Head — Metal Lever Handle



Model Ġ T13H162 1.5 gpm (5.7 L/min)

Price Finish 262.25 Chrome

- Single function pressure balance cartridge
- Order MultiChoice® Universal rough separately
- Vandal resistant lever handle adjusts temperature
- Red/blue indicator
- 30° vandal resistant cast shower head



T13H1 Shower Valve with H₂Okinetic[®] Shower Head – Metal Lever Handle

Model T13H182

Price Finish 150.90 Chrome

Price Finish

118.00 Chrome

• Single function pressure balance cartridge

- Order MultiChoice® Universal rough separately
- Vandal resistant lever handle adjusts temperature
- Red/blue indicator
- H₂Okinetic[®] shower head
- Includes arm and flange



T13H1 Shower Valve Only - Lever Blade Handle

Model Flow Price Finish Ġ. T13H103 N/A 95.05 Chrome

- Single function pressure balance cartridge
- Order MultiChoice® Universal rough separately
- Vandal resistant blade handle adjusts temperature
- Red/blue indicator



T13H1 Shower Valve with 3-Setting Touch-Clean® Shower Head — Lever Blade Handle

Model Price Finish (6.6 L/min) T13H123 161.40 Chrome

- Single function pressure balance cartridge
- Order MultiChoice® Universal rough separately Vandal resistant blade handle adjusts
- temperature
- Red/blue indicator
- Touch-Clean® 3-setting shower head is
- WaterSense® labeled
- Full Body Spray, Massage Spray, Soft Drench Spray Includes arm and flange



T13H1 Shower Valve and Touch-Clean Shower Head – Lever Blade Handle

Model T13H133

*Refer to Model Number Example for Options/Add-Ons

& **③** 1.5 gpm (5.7 L/min)

• Single function pressure balance cartridge • Order MultiChoice® Universal rough separately

- Vandal resistant blade handle adjusts temperature Red/blue indicator
- Touch-Clean® full body shower head is WaterSense® labeled · Includes arm and flange



T13H1 Shower Valve with Hand Shower, SS Bar, ADA Slide – Lever Blade Handle

Model	Flow	Price	Finish
T13H153		308.50	Chrome
T13H153-05*		327.40	Chrome
T13H153-20*	⑤ 1.5 gpm (5.7 L/min)	344.50	Chrome
T13H153-25*		363.40	Chrome

- · Single function pressure balance cartridge
- Order MultiChoice® Universal rough separately Vandal resistant blade handle adjusts
- temperature • Red/blue indicator
- 24" long, 1-1/2" stainless slide bar/grab bar ADA adjustable mount
- Hand shower and 70" vinyl hose • ADA compliant grab bar when installed per
- accessibility guidelines of the act • Touch-Clean® 2-setting hand shower is
- WaterSense® labeled · Pause, Full Body Spray

Valve rating is 1.2 GPM minimum (4.5 L/min) for 13, 14, 17 series pressure-balance and 17T series thermostatic at 45 psi (310kPa). Stated flow rate for shower heads @80 psi maximum water usage. ASME A112.1016/ASSE 1016/CSA B125.16



T13H1 Shower Valve with 30° VR Wallmount Shower Head – Lever Blade Handle

T13H163

Model

Price Finish 1.5 gpm (5.7 L/min) 262.25 Chrome



- Order MultiChoice® Universal rough separately
- Vandal resistant blade handle adjusts temperature
- Red/blue indicator
- 30° vandal resistant cast shower head



T13H1 Shower Valve with H2Okinetic® Shower Head - Lever Blade Handle

Model	Flow	Price	Finish
T13H183	₺ 1 .5 gpm (5.7 L/min)	150.90	Chrome

- Single function pressure balance cartridge
- Order MultiChoice® Universal rough separately • Vandal resistant blade handle adjusts temperature
- Red/blue indicator
- H_oOkinetic* shower head
- Includes arm and flange



T13H2 Tub/Shower Valve with Diverter Spout and Touch-Clean Shower Head - Lever Blade Handle

Model	Flow
T13H233	

- Price Finish 5.7 L/min) 140.35 Chrome
- Single function pressure balance cartridge
- Order MultiChoice® Universal rough separately
- Vandal resistant blade handle adjusts
- temperature
- Red/blue indicator
- 1/2" IPS metal spout with pull-up diverter, not ADA
- Touch-Clean® full body shower head is WaterSense® labeled
- · Includes arm and flange



T13H2 Tub/Shower Valve with Diverter Spout and Hand Shower, SS Bar, ADA Slide - Lever Blade Handle

Model	Flow	Price	Finish
T13H253	占 🤦 1.5 gpm (5.7 L/min)	330.90	Chrome

- Single function pressure balance cartridge
- Order MultiChoice® Universal rough separately
- Vandal resistant blade handle adjusts temperature
- Red/blue indicator
- 1/2" IPS metal spout with pull-up diverter,
- 24" long, 1-1/2" stainless slide bar/grab bar
- ADA adjustable hand shower mount
- Hand shower and 70" vinvl hose
- · ADA compliant grab bar when installed per accessibility guidelines of the act
- Touch-Clean* 2-setting hand shower is WaterSense® labeled
- Pause, Full Body Spray

C64

T13H2 Tub/Shower Valve with Diverter Spout and H₂Okinetic® Shower Head - Lever Blade Handle

Model		Flow	Price
T13H283	હિ 🚳	1.5 gpm (5.7 L/min)	173.35

- · Single function pressure balance cartridge
- Order MultiChoice Universal rough separately
- Vandal resistant blade handle adjusts temperature
- Red/blue indicator

Finish

Chrome

- 1/2" IPS metal spout with pull-up diverter, not ADA
- H₂Okinetic[®] shower head
- Includes arm and flange



⚠ DELTA

T13H3 Shower Valve Only with Diverter Valve for Dual Showers – Metal Lever Hand

T13H302 ★ ① 1.5 gpm (5.7 L/min) 463.40 Chrome T13H302-05* ★ ① 1.5 gpm (5.7 L/min) 482.30 Chrome T13H302-20* ★ ① 1.5 gpm (5.7 L/min) 499.30 Chrome T13H302-25* ★ ① 1.5 gpm (5.7 L/min) 518.25 Chrome	Model	Flow	Price	Finish
T13H302-20* 🔠 🧿 1.5 gpm (5.7 L/min) 499.30 Chrome	T13H302	⑤ 1.5 gpm (5.7 L/min)	463.40	Chrome
and the second s	T13H302-05*	占 💇 1.5 gpm (5.7 L/min)	482.30	Chrome
T13H302-25* 🕭 💇 1.5 gpm (5.7 L/min) 518.25 Chrome	T13H302-20*	⑤ 1.5 gpm (5.7 L/min)	499.30	Chrome
	T13H302-25*	⑤ 1.5 gpm (5.7 L/min)	518.25	Chrome

* Refer to Model Number Example for Options/Add-Ons

lle	 Single function 	pressure	balance	cartridg
	 Diverter valve 			

- Order R10700-UNWS MultiChoice® Universal
- rough separately
- Vandal resistant lever handle adjusts temperature
- Red/blue indicator
- 24" long, 1-1/2" stainless slide bar/grab bar
- ADA adjustable mount
- Hand shower and 70" vinyl hose • ADA compliant grab bar when installed per
- accessibility guidelines of the act
- Touch-Clean® 2-setting hand shower is WaterSense® labeled
- Pause, Full Body Spray



ASME A112.1016/ASSE 1016/CSA B125.16

T13H3 Shower Valve with Diverter Valve for Dual Shower with Touch-Clean Shower Head - Metal Lever Handle

Model	Flow	Price	Finish
T13H332		486.30	Chrome

⑤ 1.5 gpm (5.7 L/min)

& **1.5** gpm (5.7 L/min)

あ 1.5 gpm (5.7 L/min)

* Refer to Model Number Example for Options/Add-Ons

T13H303

T13H303-05*

T13H303-20*

T13H303-25*

· Single function pressure balance cartridge

- Diverter valve
- Order R10700-UNWS MultiChoice® Universal rough separately
- · Vandal resistant lever handle adjusts temperature
- Red/blue indicator
- 24" long, 1-1/2" stainless slide bar/grab bar
- ADA adjustable hand shower mount
- Hand shower and 70" vinyl hose
- ADA compliant grab bar when installed per accessibility guidelines of the act
- Touch-Clean® 2-setting hand shower is WaterSense® labeled
- Pause, Full Body Spray
- Touch-Clean® full body shower head is WaterSense® labeled
- Includes arm and flange
- T13H3 Shower Valve Only with Diverter Valve for Dual Showers Lever Blade Handle · Single function pressure balance cartridge Diverter valve

Price Finish

463.40 Chrome

482.30 Chrome

499.30 Chrome

518.25 Chrome

- Order R10700-UNWS MultiChoice® Universal rough separately
- Vandal resistant blade handle adjusts temperature
- Red/blue indicator
- 24" long, 1-1/2" stainless slide bar/grab bar
- ADA adjustable mount
- Hand shower and 70" vinyl hose
- ADA compliant grab bar when installed per accessibility guidelines of the act
- Touch-Clean® 2-setting hand shower is WaterSense® labeled
- · Pause, Full Body Spray

Valve rating is 1.2 GPM minimum (4.5 L/min) for 13, 14, 17 series pressure-balance and 17T series thermostatic at 45 psi (310kPa). Stated flow rate for shower heads @80 psi maximum water usage. ASME A112.1016/ASSE 1016/CSA B125.16

Valve rating is 1.2 GPM minimum (4.5 L/min) for 13, 14, 17 series pressure-balance and 17T series thermostatic at 45 psi (310kPa). Stated flow rate for shower heads @80 psi maximum water usage.

T13H333



T13H3 Shower Valve with Diverter Valve for Dual Showers with Touch-Clean®

486.30 Chrome

Price Finish

87.50 N/A

SHUWEI HEA	IU – LEVET DIAUE HAITUIE		
Model	Flow	Price	Finish

ふ 1.5 gpm (5.7 L/min)

- Single function pressure balance cartridge
- Diverter valve
- Order R10700-UNWS MultiChoice® Universal rough separately

△ DELTA

- Vandal resistant blade handle adjusts temperature
- Red/blue indicator
- 24" long, 1-1/2" stainless slide bar/grab bar
- ADA adjustable hand shower mount
- Hand shower and 70" vinyl hose
- · ADA compliant grab bar when installed per accessibility guidelines of the act
- Touch-Clean® 2-setting hand shower is WaterSense® labeled
- Pause, Full Body Spray
 Touch-Clean* full body shower head is WaterSense® labeled
- Includes arm and flange



lodel	Flow	
10000-UNWS	N/A	

· Valve body only

- Accepts single-function (13/14), dual function (17), or dual function thermostatic (17T) cartridge Cartridge ships with trim
- 1/2" universal inlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adaptors
- 1/2" universal outlets, inlets/outlets have male threads
- Back-to-back capability
- With stops

MultiChoice® Rough-Ins

MultiChoice® Rough-Ins



Model	Flow	Price	Finish
R10700-UNWS	N/A	132.20	N/A

- For use with MultiChoice® Universal T13H and T17TH series with diverter valve for dual showers
- Handle and flange ships with trim Valve and diverter cartridges ship with trim kit
- With stops

Refer to pages C34-C35 in the Quick Pick Section for a complete list of MultiChoice® Universal roughs.



Configurations vary, see below for availability.

T17TH155-25

Variation

- 1 = Shower valve
- **3** = Shower valve with diverter for dual showers
- Shower
- 0 = No shower head
- 2 = 3-setting shower head/arm/flange with Touch-Clean® spray holes
- 3 = Shower head/arm/flange with Touch-Clean*
- 5 = Hand shower with 24" SS grab bar and ADA slide

5 = Metal lever volume control with temperature adjustment

Handle

Options/Add-Ons

- 05 = 36" SS grab bar, replacing 24" bar 20 = 69 - 92" stretchable SS hose,
- replacing vinyl hose **25** = 36" SS grab bar
- AND 69 92" stretchable SS hose, replacing 24" bar and vinyl hose

How To Order a Complete MultiChoice® T17TH Series Tub/Shower Faucet



Complete Faucet



MultiChoice® Universal rough R10000-UNWS or R10700-UNWS



Trim-Select desired trim (with cartridge)

See page C68 for Multichoice° Universal roughs.



T17TH1 Shower Valve Only

Model		Flow	Price	Finish
T17TH105	Ł	N/A	367.70	Chrome

- Single function thermostatic cartridge Vandal resistant handle adjusts volume
- Order MultiChoice® Universal rough separately
- Dial adjusts temperature
- Red/blue indicator

T17TH1 Shower Valve with 3-Setting Touch-Clean® Shower Head



Model T17TH125

ふ 1.75 gpm (6.6 L/min)

Price Finish 434.05 Chrome

- Single function thermostatic cartridge
- Order MultiChoice® Universal rough separately
- Vandal resistant handle adjusts volume
- Dial adjusts temperature Red/blue indicator
- Touch-Clean® 3-setting shower head is
- WaterSense® labeled
- Full Body Spray, Massage Spray, Soft Drench Spray
- Includes arm and flange



T17TH1 Shower Valve with Touch-Clean® Shower Head

Model T17TH135

ふ 1.75 gpm (6.6 L/min)

Price Finish 390.60 Chrome

- Single function thermostatic cartridge
- Order MultiChoice® Universal rough separately
- Vandal resistant handle adjusts volume
- Dial adjusts temperature Red/blue indicator
- Touch-Clean® full body shower head is WaterSense® labeled
- Includes arm and flange

Valve rating is 1.2 GPM minimum (4.5 L/min) for 13, 14, 17 series pressure-balance and 17T series thermostatic at 45 psi (310kPa). Stated flow rate for shower heads @80 psi maximum water usage. ASME A112.1016/ASSE 1016/CSA B125.16

> DELTA COMMERCIAL TECHNICAL SERVICE 1-877-509-2680 ONLINE CATALOGS: www.deltacommercialfaucets.com (Core products ONLY) www.specselect.com (Complete Product Offering & Part Numbering System)

Valve rating is 1.2 GPM minimum (4.5 L/min) for 13, 14, 17 series pressure-balance and 17T series thermostatic at 45 psi (310kPa). Stated flow rate for shower heads @80 psi maximum water usage. ASME A112.1016/ASSE 1016/CSA B125.16

TI = Handle temperature indicators

"H" (red), "C" (blue)



Tub/Shower

T17TH1 Shower Valve with Hand Shower, SS Bar, ADA Slide

Model		Flow	Price	Finish
T17TH155	Ġ.	2.5 gpm (9.5 L/min)	581.15	Chrome
T17TH155-05*	Ġ	2.5 gpm (9.5 L/min)	600.05	Chrome
T17TH155-20*	Ġ.	2.5 gpm (9.5 L/min)	617.10	Chrome
T17TH155-25*	Ġ.	2.5 gpm (9.5 L/min)	636.00	Chrome

* Refer to Model Number Example for Options/Add-Ons

- Single function thermostatic cartridge
- Order MultiChoice® Universal rough separately
- Vandal resistant handle adjusts volume
- Dial adjusts temperature Red/blue indicator
- 24" long, 1-1/2" stainless slide bar/grab bar
- ADA adjustable mount
- Hand shower and 70" vinyl hose
- · ADA compliant grab bar when installed per accessibility guidelines of the act
- Touch-Clean* 2-setting hand shower -Pause, Full Body Spray

T17TH3 Shower	Valve	Only with	Diverter	Valve t	for Dual	Showers

Model		Flow	Price	Finish
T17TH305	Ġ.	2.5 gpm (9.5 L/min)	735.95	Chrome
T17TH305-05*	Ġ.	2.5 gpm (9.5 L/min)	754.85	Chrome
T17TH305-20*	Ġ.	2.5 gpm (9.5 L/min)	771.95	Chrome
T17TH305-25*	Ġ.	2.5 gpm (9.5 L/min)	790.85	Chrome

* Refer to Model Number Example for Options/Add-Ons

- · Single function thermostatic cartridge Diverter valve • Order R10700-UNWS MultiChoice® Universal rough separately
- Vandal resistant handle adjusts volume
- Dial adjusts temperature
- Red/blue indicator
- 24" long, 1-1/2" stainless slide bar/grab bar
- ADA adjustable mount
- Hand shower and 70" vinyl hose
- ADA compliant grab bar when installed per accessibility guidelines of the act
- Touch-Clean* 2-setting hand shower -Pause, Full Body Spray

MultiChoice® Rough-Ins



Flow Price Finish R10000-UNWS N/A 87.50 N/A

- · Valve body only
- Accepts single-function (13/14), dual function (17), or dual function thermostatic (17T) cartridge
- Cartridge ships with trim
- 1/2" universal inlets accept 1/2" copper,
- 1/2" iron pipe, PEX or CPVC adaptors
- 1/2" universal outlets, inlets/outlets have male threads
- · Back-to-back capability
- With stops

MultiChoice® Rough-Ins



Flow Price Finish N/A 132.20 N/A

- For use with MultiChoice® Universal T13H and T17TH series with diverter valve for dual showers
- Handle and flange ships with trim
- Valve and diverter cartridges ship with trim kit
- With stons

Refer to pages C34-C35 in the Quick Pick Section for a complete list of MultiChoice® Universal roughs.

Valve rating is 1.2 GPM minimum (4.5 L/min) for 13, 14, 17 series pressure-balance and 17T series thermostatic at 45 psi (310kPa). Stated flow rate for shower heads @80 psi maximum water usage. ASME A112.1016/ASSE 1016/CSA B125.16

> DELTA COMMERCIAL TECHNICAL SERVICE 1-877-509-2680 ONLINE CATALOGS: www.deltacommercialfaucets.com (Core products ONLY) www.specselect.com (Complete Product Offering & Part Numbering System)



21C144-TI

1.5 gpm (5.7 L/min) (VRLAM)

1.5 gpm (5.7 L/min) (VR)

1.5 gpm (5.7 L/min) (STD)

1.5 gpm (5.7 L/min) (STD)

0.5 gpm (1.9 L/min) (VRS)

1 = Less pop-up, no pop-up hole

MODEL NUMBER EXAMPLE:

Configurations vary, see below for availability.

2 = Metal pop-up

5 = Chain stay

Variation

- 3 = Cast open grid strainer
- 4 = Cast ADA offset open grid strainer

Outlet

21C121

21C131

21C141

21C151

21C149

Self-Closing Handle

- 2 = Vandal resistant laminar outlet (VRLAM)
- 3 = Vandal resistant aerator (VR)
- 4 = Standard aerator outlet (STD)
- 9 = Vandal resistant spray outlet (VRS)
- **5** = Vandal resistant spray outlet (VRS)

CER-TECK® 21C1 with 5-Fluted Handle — Less Pop-Up

Handle

Price Finish

196.75 Chrome

186.20 Chrome

182.15 Chrome

196.75 Chrome

214.80 Chrome

Price Finish

197.25 Chrome

- 1 = 5-Fluted
- 2 = Hooded blade
- 3 = Hooded lever
- 4 = Blade w/sanitary hood
- 5 = Wrist w/sanitary hood
- 8 = Self-closing hooded lever
- 9 = Self-closing 5-Fluted

• 2-hole 4" installation

- 5.1" long, 3.6" high
- · Cast brass body
- · Vandal resistant handles
- Red/blue indicators • No pop-up hole
- 1.75" max. deck thickness
- CER-TECK[®] cartridges



Price Finish 21C122 198.80 Chrome 21C132 188.25 Chrome ⑤ 1.5 gpm (5.7 L/min) (VR) 21C132-TI 200.55 Chrome 21C142 184.15 Chrome 21C142-TI 196.55 Chrome 21C152 0.5 gpm (1.9 L/min) (VRS) 198.80 Chrome Ė 21C152-TI 0.5 gpm (1.9 L/min) (VRS) 211.15 Chrome

- 2-hole 4" installation • 5.1" long, 3.6" high
- · Cast brass body
- Vandal resistant handles
- Red/blue indicators No pop-up hole
- 1.75" max. deck thickness
- CER-TECK° cartridges

CER-TECK® 21C1 with 3" (76 mm) Hooded Lever Handle — Less Pop-Up

21C123 197.25 Chrome 21C133 186.75 Chrome 21C133-TI 199.10 Chrome 21C143 182.65 Chrome 21C143-TI 195.00 Chrome Ġ 21C153 0.5 gpm (1.9 L/min) (VRS) 197.25 Chrome 21C153-TI Ġ 0.5 gpm (1.9 L/min) (VRS) 209.65 Chrome

Self-Closing Handle

21C193

Ġ

21C138 1.5 gpm (5.7 L/min) (VR) 218.90 Chrome 1.5 gpm (5.7 L/min) (STD) 21C148 214 80 Chrome 21C198 0.35 gpm (1.3 L/min) (VRS) 229 45 Chrome

0.35 gpm (1.3 L/min) (VRS)

- 2-hole 4" installation • 5.1" long, 3.6" high
- Cast brass body
- Vandal resistant handles Red/blue indicators
- No pop-up hole
- 1.75" max. deck thickness
- CER-TECK° cartridges

Valve rating is 1.2 GPM minimum (4.5 L/min) for 13, 14, 17 series pressure-balance and 17T series thermostatic at 45 psi (310kPa). Stated flow rate for shower heads @80 psi maximum water usage. ASME A112.1016/ASSE 1016/CSA B125.16



CER-TECK® 21C1 with 4" (102 mm) Blade Handle with Sanitary Hood — Less Pop-Up

Model		Flow	Price	Finish
21C124	<u>&</u>	1.5 gpm (5.7 L/min) (VRLAM)	219.00	Chrome
21C124-TI	৮ 💿	1.5 gpm (5.7 L/min) (VRLAM)	231.35	Chrome
21C134	৮ 📀	1.5 gpm (5.7 L/min) (VR)	208.50	Chrome
21C134-TI	હ 🚳	1.5 gpm (5.7 L/min) (VR)	220.85	Chrome
21C144	હ 🚳	1.5 gpm (5.7 L/min) (STD)	204.40	Chrome
21C144-TI	હ 🚳	1.5 gpm (5.7 L/min) (STD)	216.75	Chrome
21C154	Ġ.	0.5 gpm (1.9 L/min) (VRS)	219.00	Chrome
21C154-TI	Ł	0.5 gpm (1.9 L/min) (VRS)	231.35	Chrome
21C194	Ł.	0.35 gpm (1.3 L/min) (VRS)	219.00	Chrome

- 2-hole 4" installation
- 5.1" long, 3.6" high
- Cast brass body
- Vandal resistant handles
- Red/blue indicators
- No pop-up hole • 1.75" max. deck thickness
- CER-TECK[®] cartridges



CER-TECK° 21C1 with 6" (152 mm) Wrist Handle with Sanitary Hood – Less Pop-Up

Model		Flow	Price	Finish
21C135	હિ 🚳	1.5 gpm (5.7 L/min) (VR)	238.90	Chrome
21C145	<u>k</u> 🚳	1.5 gpm (5.7 L/min) (STD)	234.80	Chrome
21C155	Ł	0.5 gpm (1.9 L/min) (VRS)	249.45	Chrome

- 2-hole 4" installation
 - 5.1" long, 3.6" high
 - Cast brass body
 - · Vandal resistant handles
 - Red/blue indicators
 - No pop-up hole
 - 1.75" max. deck thickness
 - CER-TECK® cartridges



CER-TECK® 21C2 with 5-Fluted Handle and Metal Pop-Up

Model	Flow	Price	Finish
21C231	1.5 gpm (5.7 L/min) (VR)	247.60	Chrome
21C241	1.5 gpm (5.7 L/min) (STD)	243.50	Chrome

- 3-hole 4" installation
- 5.1" long, 3.6" high
- Cast brass body
- · Vandal resistant handles
- Red/blue indicators
- Metal pop-up
- 1.75" max. deck thickness
- CER-TECK° cartridges



CER-TECK® 21C2 with 4" (102 mm) Hooded Blade Handle and Metal Pop-Up

- 5.1" long, 3.6" high
- Price Finish ⑤ 1.5 gpm (5.7 L/min) (VR) 21C232 249.65 Chrome 21C242 & ② 1.5 gpm (5.7 L/min) (STD) 245.55 Chrome 21C252-TI 0.5 gpm (1.9 L/min) (VRS) 272.55 Chrome
- 3-hole 4" installation
- Cast brass body
- · Vandal resistant handles
- Red/blue indicators
- Metal pop-up
- 1.75" max. deck thickness
- CER-TECK° cartridges



CER-TECK® 21C2 with 3" (76 mm) Hooded Lever Handle and Metal Pop-Up

Model		Flow	Price	Finish
21C233	<u>ل</u> 🐼	1.5 gpm (5.7 L/min) (VR)	248.20	Chrome
21C243	<u>k</u> 💿	1.5 gpm (5.7 L/min) (STD)	244.10	Chrome
21C253	E	0.5 gpm (1.9 L/min) (VRS)	258.70	Chrome

- 3-hole 4" installation
 - 5.1" long, 3.6" high
 - Cast brass body
 - Vandal resistant handles • Red/blue indicators

 - Metal pop-up • 1.75" max. deck thickness
 - CER-TECK° cartridges



CER-TECK® 21C2 with 4" (102 mm) Blade Handle with Sanitary Hood and Metal Pop-Up

Model	Flow	Price	Finish
21C224		280.45	Chrome
21C234		269.85	Chrome
21C244		265.85	Chrome
21C254	& 0.5 gpm (1.9 L/min) (VRS)	280.45	Chrome

- 3-hole 4" installation
- 5.1" long, 3.6" high
- Cast brass body
- Vandal resistant handles Red/blue indicators
- Metal pop-up
- 1.75" max. deck thickness
- CER-TECK° cartridges

△ DELTA

CER-TECK® 21C2 with 6" (152 mm) Wrist Handle with Sanitary Hood and Metal Pop-Up

Model	Flow	Price	Fini
21C245		296.25	Chr

- 3-hole 4" installation • 5.1" long, 3.6" high
- Cast brass body
- · Vandal resistant handles
- Red/blue indicators Metal pop-up
- 1.75" max. deck thickness
- CER-TECK[®] cartridges

• 2-hole 4" installation



CER-TECK® 21C3 with 3" (76 mm) Hooded Lever Handle and Open Grid Strainer

The state of the s				• 5.1" long, 3.6" high
Model	Flow	Price	Finish	Cast brass body Vandal resistant handles
21C333	₺ 1 .5 gpm (5.7 L/min) (VR)	214.45	Chrome	 Red/blue indicators Cast open grid strainer 1.75" max. deck thickness CER-TECK° cartridges



CER-TECK° 21C3 with 4" (102 mm) Blade Handle with Sanitary Hood and Open Grid Strainer

odel	Flow	Price	Finish	 Van Red
1C334		236.15	Chrome	• Cas • 1.75 • CER



- 5.1" long, 3.6" high
- Cast brass body
- ındal resistant handles
- ed/blue indicators
- ast open grid strainer 75" max. deck thickness
- ER-TECK® cartridges

CER-TECK® 21C4 with 3" (76 mm) Hooded Lever Handle and Offset Open Grid Strainer

Model		Flow	Price	Finish
21C453	Ł	0.5 gpm (1.9 L/min) (VRS)	248.10	Chrome

- 2-hole 4" installation • 5.1" long, 3.6" high
- Cast brass body Vandal resistant handles
- Red/blue indicators
- Cast ADA offset open grid strainer
- 1.75" max. deck thickness
- CER-TECK® cartridges



CER-TECK° 21C4 with 4" (102 mm) Blade Handle with Sanitary Hood and Offset Open Grid Strainer

Model		Flow	Price	Finish
21C424	હિ 💇	1.5 gpm (5.7 L/min) (VRLAM)	269.80	Chrom

- 2-hole 4" installation • 5.1" long, 3.6" high
- Cast brass body Vandal resistant handles
- Red/blue indicators
- Cast ADA offset open grid strainer
- 1.75" max. deck thickness
- CER-TECK° cartridges



CER-TECK® 21C5 with 4" (102 mm) Hooded Blade Handle and Chain Stav

Model	Flow	Price	Finish
21C542		187.90	Chrome

- 2-hole 4" installation • 5.1" long, 3.6" high
- Cast brass body
- Vandal resistant handles
- Red/blue indicators • With chain stay (for plug and chain)
- 1.75" max. deck thickness
- CER-TECK° cartridges



CER-TECK° 21C5 with 3" (76 mm) Hooded Lever Handle and Chain Stay

DELTA COMMERCIAL TECHNICAL SERVICE 1-877-509-2680

ONLINE CATALOGS: www.deltacommercialfaucets.com (Core products ONLY)

www.specselect.com (Complete Product Offering & Part Numbering System)

Model		Flow	Price	Finish
21C553	Ł	0.5 gpm (1.9 L/min) (VRS)	201.05	Chrome

• 2-hole 4" installation • 5.1" long, 3.6" high

Cast brass body

Vandal resistant handles

 Red/blue indicators • With chain stay (for plug and chain)

• 1.75" max. deck thickness

CER-TECK[®] cartridges

See page C104-C105 for drainage.



Configurations vary, see below for availability.

22C151

Variation

♦ DELTA

 $\mathbf{0} = 4$ " Less pop-up, with pop-up hole

1 = 4" Less pop-up, no pop-up hole

3 = 4" with metal pop-up

4 = 4" with open grid strainer 5 = 4" with ADA offset open grid strainer

6 = Single hole, less pop-up, no pop-up hole

8 = Single hole with metal pop-up

9 =Single hole with open grid strainer

 $\mathbf{0}$ = Vandal resistant aerator outlet (VR) 2 = Vandal resistant laminar outlet (VRLAM)

3 = Vandal resistant aerator (VR)

4 = Standard aerator outlet (STD)

5 = Vandal resistant spray outlet (VRS)

9 = Vandal resistant spray outlet (VRS)

Handle

1 = 3 1/2" (89 mm) lever



22CO - 4" Centerset - Less Pop-up, with Pop-up Hole

Model	Flow		Price	Finish
22C001	<u>통</u> 💿 1.5 gpm	(5.7 L/min) (VR)	194.90	Chrome
22C021	占 💿 1.5 gpm	(5.7 L/min) (VRLAM)	208.00	Chrome
22C041	占 🚳 1.5 gpm	(5.7 L/min) (STD)	193.40	Chrome
22C051	& 0.5 gpm	(1.9 L/min) (VRS)	208.00	Chrome

• 3-hole 4" installation

• 5.9" long, 5.3" high

Cast brass body

• Vandal resistant 3 1/2" (89 mm) lever handle

Red/blue indicator

• 1.18" max. deck thickness

• 1/2" IPS shanks

• Ceramic cartridge with rotational limit stop



22C1-4" Centerset - Less Pop-up, No Pop-up Hole

Nodel		Flow	Price	Finish
2C101	გ 💿	1.5 gpm (5.7 L/min) (VR)	181.65	Chrome
22C121	১ 💿	1.5 gpm (5.7 L/min) (VRLAM)	194.75	Chrome
22C131	৬ 💿	1.5 gpm (5.7 L/min) (VR)	184.25	Chrome
22C141	<u>გ</u>	1.5 gpm (5.7 L/min) (STD)	180.15	Chrome
22C151	Ġ.	0.5 gpm (1.9 L/min) (VRS)	194.75	Chrome
20191	Ł	0.35 gpm (1.3 L/min) (VRS)	194.75	Chrome

- 2-hole 4" installation
- 5.9" long, 5.3" high
- Cast brass body
- Vandal resistant 3 1/2" (89 mm) lever handle • Red/blue indicator
- 1.18" max. deck thickness
- 1/2" IPS shanks
- Ceramic cartridge with rotational limit stop



22C3 - 4" Centerset with Metal Pop-up

Model	Flow	Price	Finish
22C301		214.90	Chrome
22C321		228.00	Chrome
22C331		217.50	Chrome
22C341		213.40	Chrome
22C351	6.5 gpm (1.9 L/min) (VRS)	228.00	Chrome

- 3-hole 4" installation
- 5.9" long, 5.3" high
- Cast brass body • Vandal resistant 3 1/2" (89 mm) lever handle
- Red/blue indicator
- 1.18" max. deck thickness
- 1/2" IPS shanks
- Ceramic cartridge with rotational limit stop






22C4 – 4" Centerset with Open Grid Strainer

Model		Flow	Price	Finish
22C401	<u>t</u>	1.5 gpm (5.7 L/min) (VR)	203.70	Chrome
22C451	Ġ	0.5 gpm (1.9 L/min) (VRS)	216.80	Chrome

- 2-hole 4" installation
- 5.9" long, 5.3" high Cast brass body
- Vandal resistant 3 1/2" (89 mm) lever handle
- Red/blue indicator
- 1.18" max. deck thickness
- 1/2" IPS shanks • Ceramic cartridge with rotational limit stop







22C5 - 4" Centerset with ADA Offset Open Grid Strainer

Model		Flow	Price	Finish
22C531	<u>ل</u> م 🐠	1.5 gpm (5.7 L/min) (VR)	225.55	Chrome
22C551	E	0.5 gpm (1.9 L/min) (VRS)	236.10	Chrome

- 2-hole 4" installation • 5.9" long, 5.3" high
- Cast brass body
- Vandal resistant 3 1/2" (89 mm) lever handle

△ DELTA

- Red/blue indicator
- 1.18" max. deck thickness
- 1/2" IPS shanks
- Ceramic cartridge with rotational limit stop



Model	Flow		Price	Finish
22C601	🕭 💿 1.5 gpn	1 (5.7 L/min) (VR)	201.00	Chrome
22C621	🕭 🕚 1.5 gpn	n (5.7 L/min) (VRLAM)	214.05	Chrome
22C631	لط 💿 1.5 gpn	n (5.7 L/min) (VR)	203.50	Chrome
22C641	🕭 💿 1.5 gpn	n (5.7 L/min) (STD)	199.40	Chrome
22C651	لط 0.5 gpn	n (1.9 L/min) (VRS)	214.05	Chrome
22C691	و.35 gp	m (1.3 L/min) (VRS)	214.05	Chrome

22C6 Single Hole Mount - Less Pop-up, No Pop-up Hole

Model		Flow	Price	Finish
22C601	Ł 💿	1.5 gpm (5.7 L/min) (VR)	201.00	Chrome
22C621	৬ 💿	1.5 gpm (5.7 L/min) (VRLAM)	214.05	Chrome
22C631	ક્ષ	1.5 gpm (5.7 L/min) (VR)	203.50	Chrome
22C641	৬ 💿	1.5 gpm (5.7 L/min) (STD)	199.40	Chrome
22C651	F	0.5 gpm (1.9 L/min) (VRS)	214.05	Chrome
22C691	Ł	0.35 gpm (1.3 L/min) (VRS)	214.05	Chrome

Model		Flow	Price	Finish
22C601	৮ 💿	1.5 gpm (5.7 L/min) (VR)	201.00	Chrome
22C621	<u>&</u>	1.5 gpm (5.7 L/min) (VRLAM)	214.05	Chrome
22C631	હિં 🚳	1.5 gpm (5.7 L/min) (VR)	203.50	Chrome
22C641	ક્ષ 🚳	1.5 gpm (5.7 L/min) (STD)	199.40	Chrome
22C651	F	0.5 gpm (1.9 L/min) (VRS)	214.05	Chrome
22C691	E	0.35 gpm (1.3 L/min) (VRS)	214.05	Chrome

22C8 Single Hole Mount with Metal Pop-up

Model		Flow	Price	Finish
22C801	৳. 🚳	1.5 gpm (5.7 L/min) (VR)	237.95	Chrome
22C831	હ 🚳	1.5 gpm (5.7 L/min) (VR)	240.55	Chrome
22C851	E	0.5 gpm (1.9 L/min) (VRS)	251.05	Chrome

Model		Flow	Price	Finish
22C801	გ 📀	1.5 gpm (5.7 L/min) (VR)	237.95	Chrome
22C831	占 ③	1.5 gpm (5.7 L/min) (VR)	240.55	Chrome
22C851	Ġ.	0.5 gpm (1.9 L/min) (VRS)	251.05	Chrome



Model	Flow	

22C9 Single Hole Mount with Open Grid Strainer

Model	Flow	Price	Finish	
22C901		225.55	Chrome	
22C951	6.5 gpm (1.9 L/min) (VRS)	238.65	Chrome	

• 1-hole installation

- 5.3" long, 5.3" high
- · Cast brass body
- Vandal resistant 3 1/2" (89 mm) lever handle
- Red/blue indicator
- 2.13" max. deck thickness
- 3/8" compression fittings
- Optional 8" coverplate 061270A available
- Ceramic cartridge with rotational limit stop
- 1-hole installation
- 5.3" long, 5.3" high
- Cast brass body
- Vandal resistant 3 1/2" (89 mm) lever handle
- Red/blue indicator
- 2.13" max. deck thickness
- 3/8" compression fittings
- Optional 8" coverplate 061270A available
- Ceramic cartridge with rotational limit stop
- 1-hole installation



- Cast brass body
- Vandal resistant 3 1/2" (89 mm) lever handle
- Red/blue indicator
- 2.13" max. deck thickness
- 3/8" compression fittings
- Optional 8" coverplate 061270A available
- Ceramic cartridge with rotational limit stop

See page C104-C105 for drainage.

MODEL NUMBER EXAMPLE: Configurations vary, see below for availability.

⚠ DELTA

Variation

23C334-TI

Outlet

- 3 = Cast spout 2 = Vandal resistant laminar outlet (VRLAM)
- **6** = Gooseneck spout 3 = Vandal resistant aerator (VR)
 - 4 = Standard aerator outlet (STD)


 - 7 = Smooth end, laminar outlet (SELAM)
- **5** = Vandal resistant spray outlet (VRS)

Handle

- ${\bf 2} = {\sf Hooded\ blade}$
- 3 = Hooded lever
- 4 = Blade w/sanitary hood
- 5 = Wrist w/sanitary hood
- spout dimensions: R4 = 6" long, 11.8" high

"H" (red), "C" (blue)

TI = Handle temperature indicators





CER-TECK° 23C3 Cast Spout - 4" (102 mm) Hooded Blade Handle

Model		Flow	Price	Finish
23C322	৬ 💿	1.5 gpm (5.7 L/min) (VRLAM)	309.25	Chrome
23C332	હ 🚳	1.5 gpm (5.7 L/min) (VR)	298.70	Chrome
23C342	& ③	1.5 gpm (5.7 L/min) (STD)	294.65	Chrome
23C352	Ł	0.5 gpm (1.9 L/min) (VRS)	309.25	Chrome

- 3-hole, 6 12" installation
- 4.5" long, 2.6" high
- Rigid cast spout and body Vandal resistant handles
- Red/blue indicators • 1.06" max. deck thickness
- CER-TECK° cartridges



CER-TECK® 23C3 Cast Spout - 3" (76 mm) Hooded Lever Handle

Model	Flow	Price	Finish
23C323	& ③ 1.5 gpm (5.7 L/min) (VRLAM)	307.80	Chrome
23C333	& ③ 1.5 gpm (5.7 L/min) (VR)	297.25	Chrome
23C343		293.15	Chrome
23C353	6.5 gpm (1.9 L/min) (VRS)	307.80	Chrome

- 3-hole, 6 12" installation
- 4.5" long, 2.6" high
- Rigid cast spout and body Vandal resistant handles
- Red/blue indicators
- 1.06" max. deck thickness
- CER-TECK° cartridges



CER-TECK® 23C3 Cast Spout - 4" (102 mm) Blade Handle with Sanitary Hood

Model		Flow	Price	Finish
23C324	৳ 🚳	1.5 gpm (5.7 L/min) (VRLAM)	329.45	Chrome
23C334	৳ 🚳	1.5 gpm (5.7 L/min) (VR)	318.95	Chrome
23C334-TI	દિ 🚳	1.5 gpm (5.7 L/min) (VR)	331.30	Chrome
23C344	હ 🚳	1.5 gpm (5.7 L/min) (STD)	314.85	Chrome
23C354	Ł	0.5 gpm (1.9 L/min) (VRS)	329.45	Chrome

- 3-hole, 6 12" installation
- 4.5" long, 2.6" high
- Rigid cast spout and body Vandal resistant handles
- Red/blue indicators • 1.06" max. deck thickness
- CER-TECK° cartridges



CER-TECK® 23C3 Cast Spout - 6" (152 mm) Wrist Handle with Sanitary Hood

Model	Flow	Price	Finish	
23C335	★ ③ 1.5 gpm (5.7 L/min) (VR)	349.35	Chrome	

- 3-hole, 6 12" installation
- 4.5" long, 2.6" high Rigid cast spout and body
- Vandal resistant handles
- Red/blue indicators • 1.06" max. deck thickness
- CER-TECK° cartridges

R7 = 9" long, 14.2" high



CER-TECK° 23C6 Gooseneck Spout – 4" (102 mm) Hooded Blade Handle

Model		Flow	Price	Finish
23C622	હિ 💿	1.5 gpm (5.7 L/min) (VRLAM)	288.65	Chrome
23C622-R4	હિ 💿	1.5 gpm (5.7 L/min) (VRLAM)	294.75	Chrome
23C632	દિ 💿	1.5 gpm (5.7 L/min) (VR)	278.15	Chrome
23C632-R7	હિ 📀	1.5 gpm (5.7 L/min) (VR)	305.55	Chrome
23C642	ક 💿	1.5 gpm (5.7 L/min) (STD)	274.05	Chrome
23C642-R4	હિ 💿	1.5 gpm (5.7 L/min) (STD)	280.15	Chrome
23C642-R7	હિ 💿	1.5 gpm (5.7 L/min) (STD)	301.50	Chrome
23C652	Ġ	0.5 gpm (1.9 L/min) (VRS)	288.65	Chrome

- 3-hole, 6 12" installation
- 4.5" long, 12" high
- Rigid/swivel gooseneck spout
- Cast body Vandal resistant handles
- Red/blue indicators
- 1.06" max. deck thickness CER-TECK[®] cartridges
- R* = Optional gooseneck spout dimensions: R4 = 6" long, 11.8" high R7 = 9" long, 14.2" high

Smooth End Goos	seneck		
23C672		288.65	Chrom
23C672-R4TI		307.10	Chrom
23C672-R7	& 💿 1.0 gpm (3.8 L/min) (SELAM)	316.05	Chrom

CER-TECK® 23C6 Gooseneck Spout - 3" (76 mm) Hooded Lever Handle

Model	Flow	Price	Finish
23C633		276.65	Chrome
23C643	★ ② 1.5 gpm (5.7 L/min) (STD)	272.60	Chrome
23C653	6.5 gpm (1.9 L/min) (VRS)	287.20	Chrome
Smooth End Goo	oseneck		
23C673	(SELAM) 1.0 gpm (3.8 L/min)	287.20	Chrome

- 3-hole, 6 12" installation
- 4.5" long, 12" high
- Rigid/swivel gooseneck spout
- Vandal resistant handles

Cast body

- Red/blue indicators
- 1.06" max. deck thickness CER-TECK[®] cartridges • R* = Optional gooseneck

spout dimensions: $\dot{R4} = 6$ " long, 11.8" high R7 = 9" long, 14.2" high

♦ DELTA

Model		Flow	Price	Finish
23C624	৯ 📀	1.5 gpm (5.7 L/min) (VRLAM)	308.95	Chrome
23C624-R4	৳ 💿	1.5 gpm (5.7 L/min) (VRLAM)	314.95	Chrome
23C624-R7	৳ 💿	1.5 gpm (5.7 L/min) (VRLAM)	336.30	Chrome
23C634	৯ 📀	1.5 gpm (5.7 L/min) (VR)	298.40	Chrome
23C634-R4	હિ 💿	1.5 gpm (5.7 L/min) (VR)	304.45	Chrome
23C644	હિ 💿	1.5 gpm (5.7 L/min) (STD)	294.30	Chrome
23C644-R4	હિ. 💿	1.5 gpm (5.7 L/min) (STD)	300.40	Chrome
23C644-R7	હિ 📀	1.5 gpm (5.7 L/min) (STD)	321.70	Chrome
23C654	Ł	0.5 gpm (1.9 L/min) (VRS)	308.95	Chrome

CER-TECK° 23C6 Gooseneck Spout – 4" (102 mm) Blade Handle with Sanitary Hood

Compath Ford Co

23C654-R4

Smooth End Goosen	eck				
23C674	Ġ	③	1.0 gpm (3.8 L/min) (SELAM)	308.95	Chrome
23C674-R4	Ė	③	1.0 gpm (3.8 L/min) (SELAM)	314.95	Chrome
23C674-R7	Ġ	(3)	1.0 gpm (3.8 L/min) (SELAM)	336.30	Chrome
23C674-TI	Ė	(3)	1.0 gpm (3.8 L/min) (SELAM)	321.25	Chrome

0.5 gpm (1.9 L/min) (VRS)

314.95 Chrome

CER-TECK® 23C6 Gooseneck spout - 6" (152 mm) Wrist Handle with Sanitary Hood

Model	Flow	Price	Finish
23C625		339.35	Chrome
23C645-R7		352.15	Chrome

- 3-hole, 6 12" installation
- 4.5" long, 12" high
- Rigid/swivel gooseneck spout
- Cast body
- Vandal resistant handles Red/blue indicators
- 1.06" max. deck thickness
- CER-TECK® cartridges
- R* = Optional gooseneck spout dimensions:
- R4 = 6" long, 11.8" high R7 = 9" long, 14.2" high

4 = Standard aerator outlet (STD)

Handle 1 = 5-fluted

3 = Hooded lever

9 = Self-closing 5-fluted

CER-TECK® 23C10 - 5-Fluted Handle

Model		Flow	Price	Finish
23C1041	(3)	1.5 gpm (5.7 L/min) (STD)	118.75	Chrome

Self-Closing Handle

23C1049

 1.5 gpm (5.7 L/min) (STD) 135.55 Chrome

- 1-hole installation
- 3.4" long, 3.1" high
- Cast brass body Vandal resistant handles
- Blue indicator
- 1.25" max. deck thickness CER-TECK® cartridges



C78

CER-TECK° 23C10 - 3" (76 mm) Hooded Lever Handle

Model	Flow	Price	Finish
23C1043	ふ 1.5 gnm (5.7 L/min) (STD)	118 75	Chrome

- 1-hole installation
- 3.4" long, 3.1" high
- Cast brass body
- Vandal resistant handles
- Blue indicator
- 1.25" max. deck thickness • CER-TECK° cartridges



Variation

6 = Gooseneck spout

MODEL NUMBER EXAMPLE: Configurations vary, see below for availability. 24T2623-R4

2 = Vandal resistant laminar outlet (VRLAM)

- 3 = Vandal resistant aerator (VR)
- 4 = Standard aerator outlet (STD)
- **5** = Vandal resistant spray outlet (VRS) 7 = Smooth end, laminar outlet (SELAM)

Handle

 $\mathbf{3} = 6$ " (152 mm) Lever blade

 $\mathbf{R}^* =$ Optional gooseneck spout dimensions: R4 = 6" long, 12" high R7 = 9" long, 14.3" high



24T26 Gooseneck Spout - 6" (152 mm) Lever Blade Handle

		Flow	Price	Finish
24T2623	હિ. 🚳	1.5 gpm (5.7 L/min) (VRLAM)	347.50	Chrome
24T2623-R4	હિ. 🚳	1.5 gpm (5.7 L/min) (VRLAM)	353.55	Chrome
24T2633	હિ. 🚳	1.5 gpm (5.7 L/min) (VR)	336.95	Chrome
24T2633-R4	હિ 🚳	1.5 gpm (5.7 L/min) (VR)	343.05	Chrome
24T2633-R7	હિ 🚳	1.5 gpm (5.7 L/min) (VR)	364.35	Chrome
24T2643	હિ. 🚳	1.5 gpm (5.7 L/min) (STD)	332.85	Chrome
24T2643-R4	ક્ષ 💿	1.5 gpm (5.7 L/min) (STD)	338.95	Chrome
24T2643-R7	હિ. 🚳	1.5 gpm (5.7 L/min) (STD)	360.30	Chrome
24T2653	Ł	0.5 gpm (1.9 L/min) (VRS)	347.50	Chrome

Smooth End Gooseneck

Omooth Life account	oon				
24T2673	ક્	③	1.0 gpm (3.8 L/min) (SELAM)	347.50	Chrome
24T2673-R4	& (3	1.0 gpm (3.8 L/min) (SELAM)	353.55	Chrome

- 2-hole installation 4 16" (102 406 mm) adjustable centers
- 4.5" long, 12.1" high
- Rigid/swivel gooseneck spout
- Vandal resistant handle
- Delta[®] stainless steel ball cartridge
- High temperature limit stop
- 1.56" max. deck thickness
- For commercial use only
 R* = Optional gooseneck spout dimensions: R4 = 6" long, 12" high R7 = 9" long, 14.3" high



24T Control Unit/Valve Only 6" (152 mm) Lever Blade Handle

Model		Flow	Price	Finish
24T0003	Ŀ	N/A	213.25	Chrome

- Control unit/valve only
- Vandal resistant handle
 - Delta[®] stainless steel ball cartridge
 - High temperature limit stop
 - 1.56" max. deck thickness
 - For commercial use only

LS = 120° Limited swing gooseneck

TI = Handle temperature indicators
"H" (red), "C" (blue)

 $\mathbf{R}^* =$ Optional gooseneck:

spout dimensions: R2 = 4.5" long, 11.7" high

MODEL NUMBER EXAMPLE:

Configurations vary, see below for availability.

25C3937-R7

Variation

8 = 4.5" (114 mm) gooseneck spout 9 = 6" (152 mm) gooseneck spout

Outlet

- 2 = Vandal resistant laminar outlet (VRLAM) 3 = Vandal resistant aerator (VR)
- 4 = Standard aerator outlet (STD) **5** = Vandal resistant spray outlet (VRS)
- 7 = Smooth end, laminar outlet (SELAM)

Handle **7** = 2.5" (63.5 mm) balanced lever blade

285.05 Chrome

285.05 Chrome

R* = Optional gooseneck spout dimensions: R7 = 9" long, 16.2" high

CER-TECK® 25C3 Gooseneck Spout - 2.5" (63.5 mm) Balanced Lever Blade Handle

Model		Flow	Price	Finish
25C3827	৮ 📀	1.5 gpm (5.7 L/min) (VRLAM)	285.05	Chrome
25C3837	હ 🚳	1.5 gpm (5.7 L/min) (VR)	274.50	Chrome
25C3847	৳ 🚳	1.5 gpm (5.7 L/min) (STD)	270.45	Chrome

Smooth End Gooseneck

25C3877

& 1.0 gpm (3.8 L/min) (SELAM)

- - 1-hole installation Cast body
 - 4.5" long, 14" high
 - · Rigid/swivel gooseneck spout
 - Vandal resistant handle
 - Red/blue indicators
 - 2" max. deck thickness
 - CER-TECK® cartridges



CER-TECK® 25C3 Gooseneck Spout - 2.5" (63.5 mm) Balanced Lever Blade Handle

Model		Flow	Price	Finish
25C3927	<u>ل</u> 🐼	1.5 gpm (5.7 L/min) (VRLAM)	285.05	Chrome
25C3937	<u></u>	1.5 gpm (5.7 L/min) (VR)	274.50	Chrome
25C3937-R7	<u> </u>	1.5 gpm (5.7 L/min) (VR)	301.90	Chrome
25C3947	<u>k</u> 🚳	1.5 gpm (5.7 L/min) (STD)	270.45	Chrome
25C3947-R7	<u>ل</u> م 🕚	1.5 gpm (5.7 L/min) (STD)	297.85	Chrome
25C3957	Ġ.	0.5 gpm (1.9 L/min) (VRS)	285.05	Chrome

Smooth End Gooseneck

25C3977 & 3.8 L/min) (SELAM)

- 1-hole installation
- Cast body
- 6.0" long, 13.9" high
- · Rigid/swivel gooseneck spout
- Vandal resistant handle
- Red/blue indicators
- 2" max. deck thickness
- CER-TECK° cartridges
- R* = Optional gooseneck spout dimensions: R7 = 9" long, 16.2" high

Coverplate for Field Conversion



Flow Price Finish 060585A N/A 94.65 Chrome • 4" (102 mm) coverplate

Outlet

Model	Flow	Price	Finish	
26C3131	1.5 gpm (5.7 L/min) (VR)	271.15	Chrome	
26C3141	1.5 gpm (5.7 L/min) (STD)	267.10	Chrome	

CER-TECK® 26C3 with 8" Wallform Spout - 5-Fluted Handle

26C3933-LS

2 = Vandal resistant laminar outlet (VRLAM)

3 = Vandal resistant aerator (VR)

4 = Standard aerator outlet (STD)

5 = Vandal resistant spray outlet (VRS)

7 = Smooth end, laminar outlet (SELAM)

Handle

1 = 5-fluted

2 = Hooded blade

3 = Hooded lever

4 = Blade with sanitary hood

5 = Wrist with sanitary hood

- 3-hole 8" installation • 8" long spout, swings 360°
- Cast body
- · Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness CER-TECK[®] cartridges

⚠ DELTA

Variation

MODEL NUMBER EXAMPLE:

1 = 8" (203 mm) Wallform spout

2 = 8" (203 mm) Tubular spout

9 = 6" (152 mm) Gooseneck spout

Configurations vary, see below for availability.

CER-TECK® 26C3 with 8" Wallform Spout - 4" (102 mm) Hooded Blade Handle

Model		Flow	Price	Finish
26C3122	Ł	1.5 gpm (5.7 L/min) (VRLAM)	283.75	Chrome
26C3132	Ġ.	1.5 gpm (5.7 L/min) (VR)	273.20	Chrome
26C3142	Ġ.	1.5 gpm (5.7 L/min) (STD)	269.15	Chrome
26C3152	Ġ.	0.5 gpm (1.9 L/min) (VRS)	283.75	Chrome

- 8" long spout, swings 360° Cast body
- Vandal resistant handles Red/blue indicators

• 3-hole 8" installation

- 1/2" IPS shanks • 1.75" max. deck thickness
- CER-TECK[®] cartridges

CER-TECK® 26C3 with 8" Wallform Spout - 3" (76 mm) Hooded Lever Handle

-					
	Model		Flow	Price	Finish
	26C3123	Ġ.	1.5 gpm (5.7 L/min) (VRLAM)	282.20	Chrome
	26C3133	Ł	1.5 gpm (5.7 L/min) (VR)	271.70	Chrome
	26C3133-TI	Ł	1.5 gpm (5.7 L/min) (VR)	284.05	Chrome
	26C3143	Ė	1.5 gpm (5.7 L/min) (STD)	267.60	Chrome
	26C3143-TI	Ł	1.5 gpm (5.7 L/min) (STD)	279.95	Chrome
	26C3153	Ł	0.5 gpm (1.9 L/min) (VRS)	282.20	Chrome

- 3-hole 8" installation • 8" long spout, swings 360°
- Cast body
- Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK[®] cartridges



CER-TECK° 26C3 with 8" Wallform Spout - 4" (102 mm) Blade Handle with Sanitary Hood

Model		Flow	Price	Finish
26C3124	E	1.5 gpm (5.7 L/min) (VRLAM)	303.95	Chrome
26C3134	E	1.5 gpm (5.7 L/min) (VR)	293.45	Chrome
26C3144	Ġ.	1.5 gpm (5.7 L/min) (STD)	289.35	Chrome
26C3154	E	0.5 gpm (1.9 L/min) (VRS)	303.95	Chrome

- 3-hole 8" installation
- 8" long spout, swings 360°
- Cast body
- Vandal resistant handles
- Red/blue indicators • 1/2" IPS shanks
- 1.75" max. deck thickness CER-TECK[®] cartridges

with Sanitary Hood

26C3155

Price Finish

334.40 Chrome

Model Flow 26C3224 1.5 gpm (5.7 L/min) (VRLAM) 26C3234 1.5 gpm (5.7 L/min) (VR) 26C3244 Ł 1.5 gpm (5.7 L/min) (STD) E 26C3244-S7 1.5 gpm (5.7 L/min) (STD) 26C3244-S8 1.5 gpm (5.7 L/min) (STD)



CER-TECK® 26C3 with 8" Tubular Spout - 5-Fluted Handle

Model	Flow	Price	Finish
26C3221	1.5 gpm (5.7 L/min) (VRLAM)	256.60	Chrome
26C3231	1.5 gpm (5.7 L/min) (VR)	246.10	Chrome
26C3241	1.5 gpm (5.7 L/min) (STD)	242.00	Chrome

CER-TECK° 26C3 with 8" Wallform Spout - 6" (152 mm) Wrist Handle

0.5 gpm (1.9 L/min) (VRS)

• 3-hole 8" installation

• 3-hole 8" installation

Cast body

•8" long spout, swings 360°

Vandal resistant handles

• 1.75" max. deck thickness

• CER-TECK° cartridges

Red/blue indicators

• 1/2" IPS shanks

 $\bullet\,8"$ long spout, swings 360°

△ DELTA

- Cast body
- Vandal resistant handles • Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK° cartridges

CER-TECK° 26C3 with 8" Tubular Spout - 4" (102 mm) Hooded Blade Handle

Model		Flow	Price	Finish
26C3222	Ġ.	1.5 gpm (5.7 L/min) (VRLAM)	258.65	Chrome
26C3222-TI	E	1.5 gpm (5.7 L/min) (VRLAM)	271.00	Chrome
26C3232	E	1.5 gpm (5.7 L/min) (VR)	248.10	Chrome
26C3232-S7	Ġ.	1.5 gpm (5.7 L/min) (VR)	257.80	Chrome
26C3242	E	1.5 gpm (5.7 L/min) (STD)	244.05	Chrome
26C3242-S8	Ġ.	1.5 gpm (5.7 L/min) (STD)	258.90	Chrome
26C3242-TI	E	1.5 gpm (5.7 L/min) (STD)	256.40	Chrome
26C3252	E	0.5 gpm (1.9 L/min) (VRS)	258.65	Chrome
26C3252-S8	E	0.5 gpm (1.9 L/min) (VRS)	273.55	Chrome

- 3-hole 8" installation
- \bullet 8" long spout, swings 360 $^{\circ}$
- Cast body
- Vandal résistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK° cartridges • $S^* = Optional$ swing spout dimensions: S3 = 6" Tubular S7 = 11" Tubular S8 = 14" Tubular



CER-TECK® 26C3 with 8" Tubular Spout - 3" (76 mm) Hooded Lever Handle

					_
Model		Flow	Price	Finish	
26C3223	Ł	1.5 gpm (5.7 L/min) (VRLAM)	257.15	Chrome	
26C3223-S8	Ł	1.5 gpm (5.7 L/min) (VRLAM)	272.05	Chrome	
26C3233	Ł	1.5 gpm (5.7 L/min) (VR)	246.60	Chrome	
26C3233-S7	Ł	1.5 gpm (5.7 L/min) (VR)	256.35	Chrome	
26C3233-S8	Ł	1.5 gpm (5.7 L/min) (VR)	261.55	Chrome	
26C3233-TI	Ł	1.5 gpm (5.7 L/min) (VR)	258.95	Chrome	
26C3243	Ł	1.5 gpm (5.7 L/min) (STD)	242.50	Chrome	
26C3243-S3	Ġ.	1.5 gpm (5.7 L/min) (STD)	247.80	Chrome	
26C3243-S7	Ł	1.5 gpm (5.7 L/min) (STD)	252.25	Chrome	
26C3243-S8	Ł.	1.5 gpm (5.7 L/min) (STD)	257.45	Chrome	
26C3253	Ł	0.5 gpm (1.9 L/min) (VRS)	257.15	Chrome	
26C3253-S8	Ł	0.5 gpm (1.9 L/min) (VRS)	272.05	Chrome	

- 3-hole 8" installation
- 8" long spout, swings 360°
- Cast body
- Vandal resistant handles
- Red/blue indicators • 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK° cartridges
- S* = Optional swing spout dimensions: S3 = 6" Tubular S7 = 11" Tubular S8 = 14" Tubular



△ DELTA

CER-TECK 26C3 with 6" Gooseneck Spout - 5-Fluted Handle

Model	Flow	Price	Finish
26C3931	1.5 gpm (5.7 L/min) (VR)	276.60	Chrome

1.5 gpm (5.7 L/min) (VR)

- CER-TECK° cartridges
- 3-hole 8" installation
- 6" long, 11.6 " high spout Rigid/swivel gooseneck spout
- Cast body

with Sanitary Hood

Price Finish 278.85 Chrome 268.35 Chrome 264.25 Chrome 26C3254 0.5 gpm (1.9 L/min) (VRS) 293.75 Chrome

CER-TECK® 26C3 with 8" Tubular Spout - 4" (102 mm) Blade Handle



273.95 Chrome 279.15 Chrome 278.85 Chrome

26C3254-S8 0.5 gpm (1.9 L/min) (VRS) • 1/2" IPS shanks

• CER-TECK° cartridges

S3 = 6" Tubular

S7 = 11" Tubular S8 = 14" Tubular

• 3-hole 8" installation CER-TECK° 26C3 with 8" Tubular Spout – 6" (152 mm) Wrist Handle with Sanitary Hood • 8" long spout, swings 360° Cast body Price Finish Vandal resistant handles

298.75 Chrome

• Red/blue indicators • 1/2" IPS shanks • 1.75" max. deck thickness

CER-TECK® 26C3 with 6" Gooseneck Spout - 4" (102 mm) Hooded Blade Handle

Model		Flow	Price	Finish		
26C3922	Ġ.	1.5 gpm (5.7 L/min) (VRLAM)	289.20	Chrome		
26C3922-R7	Ġ.	1.5 gpm (5.7 L/min) (VRLAM)	316.60	Chrome		
26C3922-TI	Ł	1.5 gpm (5.7 L/min) (VRLAM)	301.55	Chrome		
26C3932	Ġ.	1.5 gpm (5.7 L/min) (VR)	278.65	Chrome		
26C3932-LS-TI	£	1.5 gpm (5.7 L/min) (VR)	322.20	Chrome		
26C3932-R5	Ġ.	1.5 gpm (5.7 L/min) (VR)	286.35	Chrome		
26C3932-R7	Ġ.	1.5 gpm (5.7 L/min) (VR)	306.05	Chrome		
26C3942	E	1.5 gpm (5.7 L/min) (STD)	274.55	Chrome		
26C3942-R5	Ġ.	1.5 gpm (5.7 L/min) (STD)	282.25	Chrome		
26C3942-R6	£	1.5 gpm (5.7 L/min) (STD)	286.20	Chrome		
26C3942-R7	Ġ.	1.5 gpm (5.7 L/min) (STD)	301.95	Chrome		
26C3952	Ł	0.5 gpm (1.9 L/min) (VRS)	289.20	Chrome		
26C3952-R7	Ł	0.5 gpm (1.9 L/min) (VRS)	316.60	Chrome		
Smooth End Gooseneck						
26C3972	Ġ.	1.0 gpm (3.8 L/min) (SELAM)	289.20	Chrome		
26C3972-R7	Ł	1.0 gpm (3.8 L/min) (SELAM)	316.60	Chrome		

- 3-hole 8" installation
- 6" long, 11.6 " high spout
- Rigid/swivel gooseneck spout
- Cast body
- Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK° cartridges
- R* = Optional gooseneck: spout dimensions:

R5 = 6" long, 13.2" high

R6 = 6" long, 14.8" high R7 = 9" long, 13.9" high



C84

Sink Faucets

CER-TECK® 26C3 with 6" Gooseneck Spout - 3" (76 mm) Hooded Lever Handle

Model		Flow	Price	Finish		
26C3923	Ġ.	1.5 gpm (5.7 L/min) (VRLAM)	287.65	Chrome		
26C3923-LS-TI	Ġ.	1.5 gpm (5.7 L/min) (VRLAM)	331.25	Chrome		
26C3933	Ġ.	1.5 gpm (5.7 L/min) (VR)	277.15	Chrome		
26C3933-LS	Ġ.	1.5 gpm (5.7 L/min) (VR)	308.35	Chrome		
26C3933-LS-TI	Ġ.	1.5 gpm (5.7 L/min) (VR)	320.70	Chrome		
26C3933-R5	Ġ.	1.5 gpm (5.7 L/min) (VR)	284.90	Chrome		
26C3933-R7	Ġ.	1.5 gpm (5.7 L/min) (VR)	304.60	Chrome		
26C3943	Ġ.	1.5 gpm (5.7 L/min) (STD)	273.10	Chrome		
26C3943-R2	Ġ.	1.5 gpm (5.7 L/min) (STD)	279.15	Chrome		
26C3943-R5	Ġ.	1.5 gpm (5.7 L/min) (STD)	280.80	Chrome		
26C3943-R7	Ġ.	1.5 gpm (5.7 L/min) (STD)	300.50	Chrome		
26C3953	Ġ.	0.5 gpm (1.9 L/min) (VRS)	287.65	Chrome		
26C3953-LS-TI	Ġ.	0.5 gpm (1.9 L/min) (VRS)	331.25	Chrome		
26C3953-R7	Ł	0.5 gpm (1.9 L/min) (VRS)	315.10	Chrome		
Smooth End Gooseneck						
26C3973	Ġ.	1.0 gpm (3.8 L/min) (SELAM)	287.65	Chrome		
26C3973-TI	Ł	1.0 gpm (3.8 L/min) (SELAM)	300.05	Chrome		

- 3-hole 8" installation
- 6" long, 11.6 " high spout
- Rigid/swivel gooseneck spout
- Cast body
- Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK° cartridges • R* = Optional gooseneck:
- spout dimensions: $\dot{R}2 = 4.5$ " long, 11.7" high R5 = 6" long, 13.2" high

R6 = 6" long, 14.8" high R7 = 9" long, 13.9" high



△ DELTA

CER-TECK° 26C3 with 6" Gooseneck Spout - 6" (152 mm) Wrist Blade Handle with Sanitary Hood

CER-TECK° 26C3 with 6" Gooseneck Spout - 4" (102 mm) Blade Handle with

1.5 gpm (5.7 L/min) (VRLAM)

1.5 gpm (5.7 L/min) (VR)

1.5 gpm (5.7 L/min) (STD)

0.5 gpm (1.9 L/min) (VRS)

0.5 gpm (1.9 L/min) (VRS)

1.0 gpm (3.8 L/min) (SELAM)

1.0 gpm (3.8 L/min) (SELAM)

1.0 gpm (3.8 L/min) (SELAM)

Price Finish

309.40 Chrome

336.80 Chrome

321.75 Chrome

298.90 Chrome

330.10 Chrome

342.45 Chrome

304.95 Chrome

306.60 Chrome

326.25 Chrome

294.80 Chrome

300.85 Chrome

306.40 Chrome

322.20 Chrome

307.15 Chrome

336.80 Chrome

309.40 Chrome

315.50 Chrome

336.80 Chrome

Chrome

Chrome

326.00

309.40

Chrome

340.60

Flow

Ġ

F

E

Ġ

Ġ

Ġ

F

E

Ė

Ġ

F

Ġ.

E

Ė

E

F

F

Ġ

Sanitary Hood

Model

26C3924

26C3924-LS

26C3924-R7

26C3924-TI

26C3934-LS

26C3934-R2

26C3934-R5

26C3934-R7

26C3944-LS

26C3944-R2

26C3944-R6

26C3944-R7

26C3944-TI

26C3954-R7

Smooth End Gooseneck

26C3954

26C3974

26C3974-R2

26C3974-R7

26C3944

26C3934-LS-TI

26C3934

Model		Flow	Price	Finish
26C3935	&	1.5 gpm (5.7 L/min) (VR)	329.30	Chrome
26C3945	Ġ.	1.5 gpm (5.7 L/min) (STD)	325.20	Chrome
26C3955-R6	Ġ.	0.5 gpm (1.9 L/min) (VRS)	351.45	Chrome
26C3955-R7	Ł	0.5 gpm (1.9 L/min) (VRS)	367.25	Chrome
Smooth End Goo	seneck			
26C3975-R7	Ġ.	1.0 gpm (3.8 L/min) (SELAM)	367.20	Chrome

- 3-hole 8" installation
- 6" long, 11.6 " high spout
- Rigid/swivel gooseneck spout
- Cast body
- Vandal resistant handles
- Red/blue indicators • 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK° cartridges

• 3-hole 8" installation

 Cast body Vandal resistant handles • Red/blue indicators • 1/2" IPS shanks • 1.75" max. deck thickness • CER-TECK° cartridges • R* = Optional gooseneck: spout dimensions: $\dot{R2} = 4.5$ " long, 11.7" high R5 = 6" long, 13.2" high R6 = 6" long, 14.8" high R7 = 9" long, 13.9" high

• 6" long, 11.6 " high spout

• Rigid/swivel gooseneck spout

• R* = Optional gooseneck: spout dimensions: R2 = 4.5" long, 11.7" high R5 = 6" long, 13.2" high R6 = 6" long, 14.8" high

R7 = 9" long, 13.9" high



3 = Vandal resistant aerator (VR)

27C1934

Variation 2 = 8" (203 mm) tubular spout 9 = 6" (152 mm) gooseneck spout Outlet

Handle

Price Finish

361.55 Chrome

Price Finish

383.25 Chrome

3 = Hooded lever 4 = Blade w/sanitary hood



CER-TECK® 27C1 with 8" Tubular Spout - 3" (76 mm) Hooded Lever Handle

27C1233

Flow

Flow

1.5 gpm (5.7 L/min) (VR)

• 4-hole 8" installation

• 8" long spout, swings 360°

Cast end bodies

Side spray

Vandal resistant handles

• Red/blue indicators • 1/2" IPS shanks

• 1.06" max. deck thickness

• CER-TECK° cartridges



CER-TECK° 27C1 with 8" Tubular Spout – 4" (102 mm) Blade Handle with Sanitary Hood

• 4-hole 8" installation • 8" long spout, swings 360°

Cast end bodies

 Side spray Vandal resistant handles

 Red/blue indicators • 1/2" IPS shanks

• 1.06" max. deck thickness

CER-TECK[®] cartridges



C86

Sink Faucets

CER-TECK° 27C1 with 6" Gooseneck Spout - 3" (76 mm) Hooded Lever Handle

1.5 gpm (5.7 L/min) (VR)

27C1933

Flow

1.5 gpm (5.7 L/min) (VR)

Price Finish 393.25 Chrome • 4-hole 8" installation

• 6" long, 11.8 " high spout • Rigid/swivel gooseneck spout

Cast end bodies

Side spray

Vandal resistant handles

Red/blue indicators

• 1/2" IPS shanks

• 1.06" max. deck thickness

CER-TECK[®] cartridges

CER-TECK° 27C1 with 6" Gooseneck Spout - 4" (102 mm) Blade Handle with Sanitary Hood

27C1934

Flow

1.5 gpm (5.7 L/min) (VR)

Price Finish 415.00 Chrome

- 4-hole 8" installation
- 6" long, 11.8 " high spout
- · Rigid/swivel gooseneck spout Cast end bodies
- Side spray
- Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.06" max. deck thickness
- CER-TECK° cartridges

MODEL NUMBER EXAMPLE: Configurations vary, see below for availability.

27C2944-LS

Variation 1 = 8" (203 mm) Wallform spout

⚠ DELTA

 $\mathbf{2} = 8$ " (203 mm) Tubular spout 9 = 6" (152 mm) Gooseneck spout

Outlet

- 2 = Vandal resistant laminar outlet (VRLAM)
- 3 = Vandal resistant aerator (VR)
- 4 = Standard aerator outlet (STD)
- **5** = Vandal resistant spray outlet (VRS) 7 = Smooth end, laminar outlet (SELAM)

Handle

2 = Hooded blade

3 = Hooded lever

4 = Blade w/sanitary hood 5 = Wrist w/sanitary hood

 \mathbf{R}^* = Optional gooseneck spout dimensions:

R2 = 4.5" long, 11.9" high R5 = 6" long, 13.4" high R6 = 6" long, 15" high

 $\mathbf{LS} = 120^{\circ}$ Limited swing gooseneck

TI = Handle temperature indicators

"H" (red), "C" (blue)

R7= 9" long, 14.1" high $\mathbf{S}^* = \mathbf{0}$ ptional swing spout dimensions: S7 = 11" Tubular



CER-TECK° 27C2 with 8" Wallform Spout - 4" (102 mm) Hooded Blade Handle

Model		Flow	Price	Finish	
27C2122	Ł	1.5 gpm (5.7 L/min) (VRLAM)	293.45	Chrome	
27C2142	Ł	1.5 gpm (5.7 L/min) (STD)	278.80	Chrome	

• 3-hole 8" installation

• 8" long spout, swings 360°

· Cast end bodies

Vandal resistant handles

• Red/blue indicators

• 1/2" IPS shanks • 1.06" max. deck thickness CER-TECK[®] cartridges



CER-TECK° 27C2 with 8" Wallform Spout - 3" (76 mm) Hooded Lever Handle

Model		Flow	Price	Finish
27C2123	Ł	1.5 gpm (5.7 L/min) (VRLAM)	291.90	Chrome
27C2143	F	1.5 gpm (5.7 L/min) (STD)	277.35	Chrome

• 3-hole 8" installation • 8" long spout, swings 360°

Cast end bodies

 Vandal resistant handles Red/blue indicators

• 1/2" IPS shanks • 1.06" max. deck thickness

CER-TECK[®] cartridges



CER-TECK° 27C2 with 8" Wallform Spout - 4" (102 mm) Blade Handle with Sanitary Hood

Model		Flow	Price	Finish
27C2124	Ġ	1.5 gpm (5.7 L/min) (VRLAM)	313.65	Chrome
27C2144	Ł	1.5 gpm (5.7 L/min) (STD)	299.05	Chrome

• 8" long spout, swings 360°

 Cast end bodies Vandal resistant handles

• 3-hole 8" installation

Red/blue indicators

• 1/2" IPS shanks

• 1.06" max. deck thickness

• CER-TECK° cartridges



CER-TECK® 27C2 with 8" Tubular Spout - 4" (102 mm) Hooded Blade Handle

Model		Flow	Price	Finish
27C2222	Ŀ	1.5 gpm (5.7 L/min) (VRLAM)	253.25	Chrome
27C2232	Ł	1.5 gpm (5.7 L/min) (VR)	242.75	Chrome
27C2232-S7	Ł	1.5 gpm (5.7 L/min) (VR)	252.40	Chrome
27C2242	Ł	1.5 gpm (5.7 L/min) (STD)	238.65	Chrome

• 3-hole 8" installation

• 8" long spout, swings 360°

Cast end bodies

 Vandal resistant handles Red/blue indicators

• 1/2" IPS shanks • 1.06" max. deck thickness

 CER-TECK[®] cartridges $S^* = Optional swing spout$ dimensions.

S7 = 11" Tubular



CER-TECK° 27C2 with 8" Tubular Spout - 3" (76 mm) Hooded Lever Handle

Model		Flow	Price	Finish
27C2233	Ł	1.5 gpm (5.7 L/min) (VR)	241.20	Chrome
27C2243	Ġ	1.5 gpm (5.7 L/min) (STD)	237.15	Chrome
27C2243-TI	Ł	1.5 gpm (5.7 L/min) (STD)	249.50	Chrome
27C2253	Ł	0.5 gpm (1.9 L/min) (VRS)	251.75	Chrome

• 3-hole 8" installation $\bullet\,8"$ long spout, swings 360°

 Cast end bodies Vandal resistant handles

Red/blue indicators

• 1/2" IPS shanks

• 1.06" max. deck thickness • CER-TECK° cartridges

Price Finish

305.15 Chrome

348.75 Chrome

323.60 Chrome

312.85 Chrome

332.55 Chrome

317.50 Chrome

294.65 Chrome

325.85 Chrome

300.70 Chrome

322.05 Chrome

290.55 Chrome

321.75 Chrome

334.10 Chrome

317.95 Chrome

305.15 Chrome

316.80 Chrome

332.55 Chrome

305.15 Chrome

332.55 Chrome

317.50 Chrome

335.60 Chrome

R7= 9" long, 14.1" high

CER-TECK® 27C2 with 8" Tubular Spout - 4" (102 mm) Blade Handle with Sanitary Hood

Model		Flow	Price	Finish
27C2224	Ė	1.5 gpm (5.7 L/min) (VRLAM)	273.45	Chrome
27C2234	Ė	1.5 gpm (5.7 L/min) (VR)	262.95	Chrome
27C2244	Ł	1.5 gpm (5.7 L/min) (STD)	258.85	Chrome

• 3-hole 8" installation

- 8" long spout, swings 360° Cast end bodies
- Vandal resistant handles Red/blue indicators
- 1/2" IPS shanks
- 1.06" max. deck thickness CER-TECK[®] cartridges



CER-TECK® 27C2 with 8" Tubular Spout — 6" (152 mm) Wrist Handle with Sanitary Hood

Model		Flow	Price	Finish
27C2245	Ł	1.5 gpm (5.7 L/min) (STD)	289.30	Chrome

- 3-hole 8" installation • 8" long spout, swings 360°
- Cast end bodies
- Vandal resistant handles
- Red/blue indicators • 1/2" IPS shanks
- 1.06" max. deck thickness
- CER-TECK[®] cartridges



CER-TECK° 27C2 with 6" Gooseneck Spout – 4" (102 mm) Hooded Blade Handle

Model		Flow	Price	Finish	
27C2922	Ġ.	1.5 gpm (5.7 L/min) (VRLAM)	284.95	Chrome	
27C2922-LS	Ġ.	1.5 gpm (5.7 L/min) (VRLAM)	316.15	Chrome	
27C2922-R7	Ł	1.5 gpm (5.7 L/min) (VRLAM)	312.35	Chrome	
27C2932	Ġ.	1.5 gpm (5.7 L/min) (VR)	274.40	Chrome	
27C2932-R7	Ġ.	1.5 gpm (5.7 L/min) (VR)	301.80	Chrome	
27C2942	Ġ.	1.5 gpm (5.7 L/min) (STD)	270.35	Chrome	
27C2942-LS	Ġ.	1.5 gpm (5.7 L/min) (STD)	301.55	Chrome	
27C2942-LS-TI	Ġ.	1.5 gpm (5.7 L/min) (STD)	313.85	Chrome	
27C2942-R5	Ġ.	1.5 gpm (5.7 L/min) (STD)	278.05	Chrome	
27C2942-R7	Ġ	1.5 gpm (5.7 L/min) (STD)	297.70	Chrome	
27C2952	Ġ.	0.5 gpm (1.9 L/min) (VRS)	284.95	Chrome	
27C2952-R7	Ł	0.5 gpm (1.9 L/min) (VRS)	312.35	Chrome	
Smooth End Gooseneck					
27C2972	Ł	1.0 gpm (3.8 L/min) (SELAM)	284.95	Chrome	
27C2972-R7	Ġ.	1.0 gpm (3.8 L/min) (SELAM)	312.35	Chrome	

- 3-hole 8" installation
- Cast end bodies

• 6" long spout, 11.8" high spout

- · Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.06" max. deck thickness
- CER-TECK° cartridges
- R*= Optional gooseneck spout dimensions: R2 = 4.5" long, 11.9" high R5 = 6" long, 13.4" high R6 = 6" long, 15" high R7= 9" long, 14.1" high



CER-TECK° 27C2 with 6" Gooseneck Spout - 3" (76 mm) Hooded Lever Handle

Model		Flow	Price	Finish		
27C2923	E	1.5 gpm (5.7 L/min) (VRLAM)	283.45	Chrome		
27C2933	E	1.5 gpm (5.7 L/min) (VR)	272.90	Chrome		
27C2933-LS	Ġ.	1.5 gpm (5.7 L/min) (VR)	304.10	Chrome		
27C2933-R7	E	1.5 gpm (5.7 L/min) (VR)	300.30	Chrome		
27C2943	Ġ.	1.5 gpm (5.7 L/min) (STD)	268.80	Chrome		
27C2943-LS-TI	E	1.5 gpm (5.7 L/min) (STD)	312.40	Chrome		
27C2943-R7	E	1.5 gpm (5.7 L/min) (STD)	296.25	Chrome		
27C2953-LS-TI	E	0.5 gpm (1.9 L/min) (VRS)	327.00	Chrome		
Smooth End Gooseneck						
27C2973	Ł	1.0 gpm (3.8 L/min) (SELAM)	283.45	Chrome		

- 3-hole 8" installation
- 6" long spout, 11.8" high spout
- Cast end bodies
- Vandal resistant handles • Red/blue indicators
- 1/2" IPS shanks
- 1.06" max. deck thickness
- CER-TECK° cartridges
- R*= Optional gooseneck spout dimensions: $\dot{R2} = 4.5$ " long, 11.9" high R5 = 6" long, 13.4" high R6 = 6" long, 15" high R7= 9" long, 14.1" high



⚠ DELTA

CER-TECK° 27C2 with 6" Gooseneck Spout — 6" (152 mm) Wrist Handle with Sanitary Hood

CER-TECK° 27C2 with 6" Gooseneck Spout - 4" (102 mm) Blade Handle

1.5 gpm (5.7 L/min) (VRLAM)

1.5 gpm (5.7 L/min) (VR)

1.5 gpm (5.7 L/min) (STD)

0.5 gpm (1.9 L/min) (VRS)

0.5 gpm (1.9 L/min) (VRS)

0.5 gpm (1.9 L/min) (VRS)

1.0 gpm (3.8 L/min) (SELAM)

1.0 gpm (3.8 L/min) (SELAM)

1.0 gpm (3.8 L/min) (SELAM)

Flow

Ġ

Ġ

Ė

Ė

Ė

Ė

Ġ

Ė

Ė

Ė

Ġ

Ė

Ė

Ġ

with Sanitary Hood

Model

27C2924

27C2924-LS-TI

27C2924-R2TI

27C2924-R5

27C2924-R7

27C2924-TI

27C2934-LS

27C2934-R2

27C2934-R7

27C2944-LS

27C2944-R7

27C2954-R6

27C2954-R7

27C2974

27C2974-R7

27C2974-TI

27C2975

Smooth End Gooseneck

27C2954

27C2944-LS-TI

27C2944

27C2934

Model		Flow	Price	Finish	
27C2935	Ł	1.5 gpm (5.7 L/min) (VR)	325.05	Chrome	
27C2945-R7	Ġ.	1.5 gpm (5.7 L/min) (STD)	348.35	Chrome	
27C2955	Ġ.	0.5 gpm (1.9 L/min) (VRS)	335.60	Chrome	
Smooth End Goos	seneck				

1.0 gpm (3.8 L/min) (SELAM)

- 3-hole 8" installation
- 6" long spout, 11.8" high spout
- Cast end hodies Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.06" max. deck thickness CER-TECK[®] cartridges
- R*= Optional gooseneck spout dimensions: R2 = 4.5" long, 11.9" high R5 = 6" long, 13.4" high R6 = 6" long, 15" high R7= 9" long, 14.1" high

C88

Configurations vary, see below for availability.

27C4944-TI

Variation

- 2 = 8" (203 mm) Tubular spout 3 = 6" (152 mm) Tubular spout
- 8 = 4.5" (114 mm) Gooseneck spout
- 9 = 6" (152 mm) Gooseneck spout

Outlet

- 2 = Vandal resistant laminar outlet (VRLAM) 3 = Vandal resistant aerator (VR)
- 4 = Standard aerator outlet (STD)
- **5** = Vandal resistant spray outlet (VRS)
- **7** = Smooth end, laminar outlet (SELAM)

Handle

- 2 = Hooded blade 3 = Hooded lever
- 4 = Blade w/sanitary hood 5 = Wrist w/sanitary hood
- $LS = 120^{\circ}$ Limited swing gooseneck
- TI = Handle temperature indicators
 "H" (red), "C" (blue)
- R* = Optional gooseneck
 - spout dimensions: R5 = 6" long, 13.25" high
 - R6 = 6" long, 14.9" high
- R7 = 9" long, 14" high $S^* = Optional swing spout$
- dimensions. S7 = 11" Tubular S8 = 14" Tubular

27C4222

27C4242

27C4242-S7

CER-TECK® 27C4 with 8" Tubular Spout - 4" (102 mm) Hooded Blade Handle

- Price Finish ⑤ 1.5 gpm (5.7 L/min) (VRLAM) 191.30 Chrome (VR) 1.5 gpm (5.7 L/min) 180.75 Chrome & ③ 1.5 gpm (5.7 L/min) (STD) 176.70 Chrome & 1.5 gpm (5.7 L/min) (STD) 186.35 Chrome
- 2-hole 4" installation
- •8" long spout, swings 360°
- Cast body
- Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness • CER-TECK° cartridges
- S* = Optional swing spout dimensions: S7 = 11" Tubular

S8 = 14" Tubular

CER-TECK® 27C4 with 8" Tubular Spout - 3" (76 mm) Hooded Lever Handle

- Price Finish 27C4223 189.80 Chrome 27C4233 (VR) 1.5 gpm (5.7 L/min) (VR) 179.25 Chrome 27C4243 175.15 Chrome 27C4243-S8 190.05 Chrome 0.5 gpm (1.9 L/min) (VRS) 27C4253 189.80 Chrome
- 2-hole 4" installation
- 8" long spout, swings 360° Cast body
- Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK° cartridges
- S* = Optional swing spout dimensions: S7 = 11" Tubular

S8 = 14" Tubular



CER-TECK° 27C4 with 8" Tubular Spout - 4" (102 mm) Blade Handle with Sanitary Hood

- Flow Price Finish 27C4224 (5.7 L/min) (VRLAM) 211.50 Chrome 27C4234 201.00 Chrome 27C4244 196.90 Chrome 27C4254 0.5 gpm (1.9 L/min) (VRS) 211.50 Chrome
- 2-hole 4" installation • 8" long spout, swings 360°
- Cast body Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK° cartridges
- S* = Optional swing spout dimensions: S7 = 11" Tubular

S8 = 14" Tubular



CER-TECK° 27C4 with 8" Tubular Spout - 6" (152 mm) Wrist Handle with Sanitary Hood

Model	Flow	Price	Finish
27C4235	& ③ 1.5 gpm (5.7 L/min) (VR)	231.40	Chrome

- 2-hole 4" installation
- $\bullet\,8"$ long spout, swings 360°
- Cast body
- Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness • CER-TECK° cartridges

⚠ DELTA

CER-TECK® 27C4 with 6" Tubular Spout - 4" (102 mm) Hooded Blade Handle

Model	Flow	Price	Finish
27C4332	& ③ 1.5 gpm (5.7 L/min) (VR)	180.75	Chrome
27C4342	& ③ 1.5 gpm (5.7 L/min) (STD)	176.70	Chrome

- 2-hole 4" installation • 6" long spout, swings 360° Cast body Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks • 1.75" max. deck thickness
- CER-TECK° cartridges



CER-TECK° 27C4 with 6" Tubular Spout - 3" (76 mm) Hooded Lever Handle

Model	Flow	Price	Finish
27C4323	& ③ 1.5 gpm (5.7 L/min) (VRLAM)	189.80	Chrome
27C4333	⑤ 1.5 gpm (5.7 L/min) (VR)	179.25	Chrome
27C4343	& ③ 1.5 gpm (5.7 L/min) (STD)	175.15	Chrome
27C4353	& 0.5 gpm (1.9 L/min) (VRS)	189.80	Chrome

- 2-hole 4" installation
- 6" long spout, swings 360°
- Cast body
- Vandal resistant handles
- Red/blue indicators • 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK° cartridges



CER-TECK° 27C4 with 6" Tubular Spout - 4" (102 mm) Blade Handle with Sanitary Hood

Model	Flow	Price	Finish	
27C4324	& ③ 1.5 gpm (5.7 L/min) (VRLAM)	211.50	Chrome	
27C4344		196.90	Chrome	

- 2-hole 4" installation
- 6" long spout, swings 360°
- Cast body
- Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness • CER-TECK° cartridges



CER-TECK° 27C4 with 4.5" Gooseneck Spout - 4" (102 mm) Hooded Blade Handle

Model	Flow	Price	Finish
27C4822		235.95	Chrome
27C4832		225.45	Chrome
27C4842	⑤ 1.5 gpm (5.7 L/min) (STD)	221.35	Chrome
27C4842-TI	⑤ 1.5 gpm (5.7 L/min) (STD)	233.70	Chrome
27C4852	6.5 gpm (1.9 L/min) (VRS)	235.95	Chrome

& **③** 1.0 gpm (3.8 L/min) (SELAM)

235.95 Chrome

Smooth End Gooseneck

27C4872

- 2-hole 4" installation • 4.5" long, 11.75" high spout
- Rigid/swivel gooseneck spout

Sink Faucets

- Cast body Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK° cartridges

27C4873

• 2-hole 4" installation

• Rigid/swivel gooseneck spout

Vandal résistant handles

• R* = Optional gooseneck spout dimensions: R5 = 6" long, 13.25" high R6 = 6" long, 14.9" high

• 6" long, 11.7" high

Red/blue indicators

• 1/2" IPS shanks

Cast body



CER-TECK° 27C4 with 4.5" Gooseneck Spout – 3" (76 mm) Hooded Lever Handle

Model		Flow	Price	Finish
27C4823	<u>ل</u> م 🐼	1.5 gpm (5.7 L/min) (VRLAM)	234.50	Chrome
27C4833	<u>L</u>	1.5 gpm (5.7 L/min) (VR)	224.00	Chrome
27C4833-TI	<u>ل</u> م 🐼	1.5 gpm (5.7 L/min) (VR)	236.35	Chrome
27C4843	હ 💿	1.5 gpm (5.7 L/min) (STD)	219.90	Chrome
27C4843-TI	હ 🚳	1.5 gpm (5.7 L/min) (STD)	232.25	Chrome
27C4853	Ġ.	0.5 gpm (1.9 L/min) (VRS)	234.50	Chrome
Smooth End Gooseneck				

• 2-hole 4" installation

- 4.5" long, 11.75" high spout
- Rigid/swivel gooseneck spout
- Cast body
- Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness • CER-TECK° cartridges

CER-TECK 27C4 with 4.5" Gooseneck Spout - 4" (102 mm) Blade Handle with Sanitary Hood

234.50 Chrome

Model		Flow	Price	Finish
27C4824	હ 🚳	1.5 gpm (5.7 L/min) (VRLAM)	256.20	Chrome
27C4834	હ 🚳	1.5 gpm (5.7 L/min) (VR)	245.65	Chrome
27C4834-TI	હિ 🚳	1.5 gpm (5.7 L/min) (VR)	258.00	Chrome
27C4844	હ 🚳	1.5 gpm (5.7 L/min) (STD)	241.65	Chrome
27C4844-TI	હ 🚳	1.5 gpm (5.7 L/min) (STD)	253.95	Chrome
27C4854	Ł	0.5 gpm (1.9 L/min) (VRS)	256.20	Chrome

Smo

Smooth End Goosen	eck			
27C4874	<u>k</u>	1.0 gpm (3.8 L/min) (SELAM)	256.20	Chrome
27C4874-TI	<u>k</u>	1.0 gpm (3.8 L/min) (SELAM)	268.55	Chrome

- 2-hole 4" installation
- 4.5" long, 11.75" high spout
- Rigid/swivel gooseneck spout Cast body
- Vandal resistant handles Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK® cartridges



C92

CER-TECK® 27C4 with 4.5" Gooseneck Spout - 6" (152 mm) Wrist Handle with Sanitary Hood

Model	Flow	Price	Finish
27C4835		276.10	Chrome
27C4845		272.05	Chrome

- 2-hole 4" installation
- 4.5" long, 11.75" high spout · Rigid/swivel gooseneck spout
- Cast body
- Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK° cartridges



Model

27C4923

27C4933

27C4933-LS

27C4933-R7

27C4943-R7

27C4973-TI

Smooth End Gooseneck

27C4943

27C4953

△ DELTA

CER-TECK° 27C4 with 6" Gooseneck Spout - 4" (102 mm) Hooded Blade Handle

Model		Flow	Price	Finish		
27C4922	Ł 🚳	1.5 gpm (5.7 L/min) (VRLAM)	235.95	Chrome		
27C4922-LS-TI	<u>k</u> 🚳	1.5 gpm (5.7 L/min) (VRLAM)	279.55	Chrome		
27C4922-R7	હિ. 🚳	1.5 gpm (5.7 L/min) (VRLAM)	263.35	Chrome		
27C4932	Ł 🚳	1.5 gpm (5.7 L/min) (VR)	225.45	Chrome		
27C4932-R7	<u>k</u> 🚳	1.5 gpm (5.7 L/min) (VR)	252.85	Chrome		
27C4942	<u>k</u> 🚳	1.5 gpm (5.7 L/min) (STD)	221.35	Chrome		
27C4942-LS	<u>k</u> 🚳	1.5 gpm (5.7 L/min) (STD)	252.60	Chrome		
27C4942-R6	<u>k</u> 🚳	1.5 gpm (5.7 L/min) (STD)	233.00	Chrome		
27C4952	E	0.5 gpm (1.9 L/min) (VRS)	235.95	Chrome		
27C4952-LS	E	0.5 gpm (1.9 L/min) (VRS)	267.20	Chrome		
	Smooth End Gooseneck					
27C4972	& ©	1.0 gpm (3.8 L/min) (SELAM)	235.95	Chrome		

CER-TECK° 27C4 with 6" Gooseneck Spout – 3" (76 mm) Hooded Lever Handle

& **3** 1.5 gpm (5.7 L/min) (VR)

5 1.5 gpm (5.7 L/min) (VR)

₺ 3 1.5 gpm (5.7 L/min) (STD)

0.5 gpm (1.9 L/min) (VRS)

Price Finish

234.50 Chrome

224.00 Chrome

255.15 Chrome

251.35 Chrome

219.90 Chrome

247.30 Chrome

234.50 Chrome

246.85 Chrome

 2-hole 	4"	installation

- 6" long, 11.7" high spout
- Rigid/swivel gooseneck spout
- Cast body Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK[®] cartridges
- R* = Optional gooseneck spout dimensions:
 - R5 = 6" long, 13.25" high
 - R6 = 6" long, 14.9" high

 - R7 = 9" long, 14" high

27C4974-TI



CER-TECK° 27C4 with 6" Gooseneck Spout - 4" (102 mm) Blade Handle with Sanitary Hood $_$

Model		Flow	Price	Finish
27C4924	હ 🚳	1.5 gpm (5.7 L/min) (VRLAM)	256.20	Chrome
27C4924-LS	હ 🚳	1.5 gpm (5.7 L/min) (VRLAM)	287.40	Chrome
27C4924-R5	હ 🚳	1.5 gpm (5.7 L/min) (VRLAM)	263.95	Chrome
27C4924-R7	હ 🚳	1.5 gpm (5.7 L/min) (VRLAM)	283.65	Chrome
27C4924-TI	હિ 🚳	1.5 gpm (5.7 L/min) (VRLAM)	268.55	Chrome
27C4934	હ 🚳	1.5 gpm (5.7 L/min) (VR)	245.65	Chrome
27C4934-LS	હ 🚳	1.5 gpm (5.7 L/min) (VR)	276.90	Chrome
27C4934-LS-TI	હ 🚳	1.5 gpm (5.7 L/min) (VR)	289.25	Chrome
27C4934-R7	<u>ل</u> 🚳	1.5 gpm (5.7 L/min) (VR)	273.10	Chrome
27C4934-TI	હ 🚳	1.5 gpm (5.7 L/min) (VR)	245.65	Chrome
27C4944	હિ. 🚳	1.5 gpm (5.7 L/min) (STD)	241.65	Chrome
27C4944-LS	હ 🚳	1.5 gpm (5.7 L/min) (STD)	272.80	Chrome
27C4944-LS-TI	હિ. 🚳	1.5 gpm (5.7 L/min) (STD)	285.15	Chrome
27C4944-R5	હ 💇	1.5 gpm (5.7 L/min) (STD)	249.35	Chrome
27C4944-R7	હ 🚳	1.5 gpm (5.7 L/min) (STD)	269.00	Chrome
27C4944-TI	હ 🚳	1.5 gpm (5.7 L/min) (STD)	253.95	Chrome
27C4954	Ł	0.5 gpm (1.9 L/min) (VRS)	256.20	Chrome
27C4954-LS-TI	Ł	0.5 gpm (1.9 L/min) (VRS)	299.75	Chrome
27C4954-R7	Ł	0.5 gpm (1.9 L/min) (VRS)	283.65	Chrome
Smooth End Goos	eneck			
27C4974	હ 🚳	1.0 gpm (3.8 L/min) (SELAM)	256.20	Chrome
27C4974-R7	& ③	1.0 gpm (3.8 L/min) (SELAM)	283.65	Chrome

- 2-hole 4" installation
- 6" long, 11.7" high spout
- Rigid/swivel gooseneck spout
- Cast body
- Vandal resistant handles
- Red/blue indicators
- 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK[®] cartridges • R* = Optional gooseneck
- spout dimensions:
- R5 = 6" long, 13.25" high
- R6 = 6" long, 14.9" high
- R7 = 9" long, 14" high

CER-TECK° 27C4 with 6" Gooseneck Spout – 6" (152 mm) Wrist Handle with Sanitary Hood

268.55 Chrome

					_
Model		Flow	Price	Finish	
27C4925	১ 🚳	1.5 gpm (5.7 L/min) (VRLAM)	286.60	Chrome	
27C4925-R7	৯ 🚳	1.5 gpm (5.7 L/min) (VRLAM)	314.05	Chrome	
27C4955	Ł	0.5 gpm (1.9 L/min) (VRS)	286.60	Chrome	
Smooth End Goos	seneck				
27C4975	占 ③	1.0 gpm (3.8 L/min) (SELAM)	272.95	Chrome	

- 2-hole 4" installation
- 6" long, 11.7" high spout
- Rigid/swivel gooseneck spout
- Cast body
- Vandal résistant handles
- Red/blue indicators • 1/2" IPS shanks
- 1.75" max. deck thickness
- CER-TECK[®] cartridges • R* = Optional gooseneck

- spout dimensions: R5 = 6" long, 13.25" high R6 = 6" long, 14.9" high R7 = 9" long, 14" high

MODEL NUMBER EXAMPLE:

Configurations vary, see below for availability.

♦ DELTA

 $\mathbf{6} = \mathsf{Gooseneck} \; \mathsf{spout}$

27C633

Outlet

- 3 = Vandal resistant aerator (VR)
- 4 = Standard aerator outlet (STD) **5** = Vandal resistant spray outlet (VRS)
- Handle 3 = Hooded lever
- 8 = Self-closing hooded lever



CER-TECK® 27C6 with 4.5" Gooseneck Spout - 3" (76 mm) Hooded Lever Handle

Model	Flow	Price	Finish
27C633		202.40	Chrome
27C643		198.30	Chrome
27C653	と 0.5 gpm (1.9 L/min) (VRS)	212.95	Chrome

Self-Closing Handle

27C638	1.5 gpm (5.7 L/min) (VR)	219.20	Chrome
27C648	1.5 gpm (5.7 L/min) (STD)	215.15	Chrome
27C658	0.5 gpm (1.9 L/min) (VRS)	229.75	Chrome

- 1-hole installation
- Cast body
- 4.5" long, 14.5" high Rigid/swivel gooseneck spout
- Vandal resistant ADA handle
- Red/blue indicators
- 1.25" max. deck thickness
- CER-TECK° cartridges

MODEL NUMBER EXAMPLE:

Outlet **6** = Spout end vacuum breaker

8 = Body mounted vacuum breaker

Handle 3 = Hooded lever

389.05 Chrome

Price Finish

4 = Blade w/sanitary hood 5 = Wrist w/sanitary hood

 $\mathbf{AC} = 5.5$ " to 10.5" adjustable centers

CER-TECK° 28C2 with 5.5" Plain Spout* - 3" (76 mm) Hooded Lever Handle

Model		Flow	Price	Finish		
Spout End Vacuum Breaker						
28C2063	E	4.0 gpm (15.1 L/min)	379.20	Chrome		

Body Mounted Vacuum Breaker

28C2083 4.0 gpm (15.1 L/min) Wall installation - 8" centers

 Integral check stops Cast body

Vandal résistant handles

Red/blue indicators

 Plain spout Pail hook

• Garden hose end outlet

• CER-TECK° cartridges

Not for potable water



CER-TECK® 28C2 with 10.5" Spout with Top/Bottom Brace* - 3" (76 mm) Hooded Lever Handle

Model		Flow	Price	Finish
Spout End Vacuur 28C2363	m Breaker	4.0 gpm (15.1 L/min)	400.20	Chrome
Body Mounted Va	cuum Brea	ker		
28C2383	Ł	4.0 gpm (15.1 L/min)	410.05	Chrome
28C2383-AC	E	4.0 gpm (15.1 L/min	492.30	Chrome

- Wall installation 8" centers
- Integral check stops
- Cast body
- Vandal resistant handles
- Red/blue indicators
- Spout with top/bottom brace
- Pail hook
- Garden hose end outlet
- CER-TECK® cartridges
- Not for potable water



CER-TECK° 28C2 with 10.5" Spout with Top/Bottom Brace* -4" (102 mm) Blade Handle with Sanitary Hood

Spout End Vacu	um Breaker			
28C2364	Ł	4.0 gpm (15.1 L/min)	422.35	Chrome
Body Mounted V	acuum Bre	aker		
28C2384	Ġ.	4.0 gpm (15.1 L/min)	432.20	Chrome
28C2384-AC	Ł	4.0 gpm (15.1 L/min)	514.40	Chrome

- Wall installation 8" centers
- Integral check stops Cast body
- Vandal resistant handles
- Red/blue indicators
- Spout with top/bottom brace
- Pail hook
- · Garden hose end outlet • CER-TECK® cartridges
- Not for potable water



CER-TECK® 28C2 with 10.5" Spout with Top/Bottom Brace* - 6" (152 mm) Wrist Handle with Sanitary Hood

0 (102 11111	, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,				
Model		Flow	Price	Finish	
Body Mounted 28C2385	Vacuum Brea	4. 0 gpm (15.1 L/min)	463.25	Chrome	

- Wall installation 8" centers
- Integral check stops
- Cast body
- Vandal résistant handles
- Red/blue indicators Spout with top/bottom brace
- Pail hook
- Garden hose end outlet
- CER-TECK° cartridges
- Not for potable water

DELTA COMMERCIAL TECHNICAL SERVICE 1-877-509-2680 ONLINE CATALOGS: www.deltacommercialfaucets.com (Core products ONLY) www.specselect.com (Complete Product Offering & Part Numbering System) **△** DELTA

28C2 Wallmount Service Sink Faucets with 8" Centers and Rigid Spout

41.70 Stainless Steel



28T911

Model	Flow	Price	Finish
28T910	N/A	75.10	Stainless Steel

• Stainless steel mop holder

• 3 spring loaded rubber grip holders

48" Hose and Hanger for 28C Wallmount Service Sink Faucets Flow Model Price Finish

N/A

• 48" hose and stainless steel hanger

^{*}Distance from wall to spout outlet with spout end vacuum breaker.

Configurations vary, see below for availability.

28C4443-AC

Variation

- 2 = 8" (203 mm) tubular spout
- 9 = 6" (152 mm) gooseneck spout

4 = 11" (279 mm) tubular spout

Outlet

- 2 = Vandal resistant laminar outlet (VRLAM)
- 3 = Vandal resistant aerator (VR)

4 = Standard aerator outlet (STD)

Handle

- 3 = Hooded lever
- 4 = Blade w/sanitary hood

AC = 5.5" to 10.5" adjustable centers

R*= Optional gooseneck spout dimensions: R2 = 4.5" long R7 = 9" long

 $S^* = Optional swing spout$ dimensions: S3 = 6" Tubular S8 = 14" Tubular



CER-TECK® 28C4 with 8" Tubular Spout - 3" (76 mm) Hooded Lever Handle

Model		Flow	Price	Finish
28C4233	Ė	1.5 gpm (5.7 L/min) (VR)	288.75	Chrome
28C4233-S3	Ł	1.5 gpm (5.7 L/min) (VR)	294.20	Chrome
28C4233-S8	Ġ	1.5 gpm (5.7 L/min) (VR)	303.95	Chrome
28C4243	Ł	1.5 gpm (5.7 L/min) (STD)	284.65	Chrome
28C4243-AC	Ł	1.5 gpm (5.7 L/min) (STD)	366.90	Chrome
28C4243-S8	Ł	1.5 gpm (5.7 L/min) (STD)	299.80	Chrome

- Wall installation 8" centers
- \bullet 8" long spout, swings 360 $^{\circ}$
- Cast body
- Vandal resistant handles
- Red/blue indicators • LESS Integral Stops
- CER-TECK[®] cartridges
- For commercial use only
- S* = Optional swing spout dimensions: S3 = 6" Tubular S8 = 14" Tubular



CER-TECK° 28C4 with 8" Tubular Spout - 4" (102 mm) Blade Handle with Sanitary Hood

Model		Flow	Price	Finish
28C4224	Ġ.	1.5 gpm (5.7 L/min) (VRLAM)	321.65	Chrome
28C4234	Ł	1.5 gpm (5.7 L/min) (VR)	310.95	Chrome
28C4244	Ġ.	1.5 gpm (5.7 L/min) (STD)	306.80	Chrome

- Wall installation 8" centers
- •8" long spout, swings 360°
- Cast body
- Vandal resistant handles
- Red/blue indicators
- LESS Integral Stops
- CER-TECK[®] cartridges
- For commercial use only



CER-TECK° 28C4 with 11" Tubular Spout - 3" (76 mm) Hooded Lever Handle

Model		Flow	Price	Finish
28C4423	Ġ.	1.5 gpm (5.7 L/min) (VRLAM)	304.50	Chrome
28C4433	Ł	1.5 gpm (5.7 L/min) (VR)	293.80	Chrome
28C4443	Ġ.	1.5 gpm (5.7 L/min) (STD)	289.60	Chrome
28C4443-AC	Ł	1.5 gpm (5.7 L/min) (STD)	371.90	Chrome

- Wall installation 8" centers
- 11" long spout, swings 360°
- Cast body
- Vandal resistant handles
- Red/blue indicators • LESS Integral Stops
- CER-TECK® cartridges
- For commercial use only



CER-TECK° 28C4 with 11" Tubular Spout - 4" (102 mm) Blade Handle with Sanitary Hood

Model		Flow	Price	Finish
28C4424	Ġ.	1.5 gpm (5.7 L/min) (VRLAM)	326.65	Chrome
28C4434	E	1.5 gpm (5.7 L/min) (VR)	315.90	Chrome
28C4444	Ġ.	1.5 gpm (5.7 L/min) (STD)	311.75	Chrome

- Wall installation 8" centers
- •11" long spout, swings 360°
- Cast body
- Vandal resistant handles Red/blue indicators
- LESS Integral Stops
- CER-TECK[®] cartridges
- · For commercial use only



♦ DELTA

CER-TECK® 28C4 with 6" Gooseneck Spout - 3" (76 mm) Hooded Lever Handle

Model		Flow	Price	Finish
28C4933	Ł	1.5 gpm (5.7 L/min) (VR)	320.65	Chrome
28C4933-R7	Ġ	1.5 gpm (5.7 L/min) (VR)	348.55	Chrome
28C4943	Ġ.	1.5 gpm (5.7 L/min) (STD)	316.50	Chrome
28C4943-R2	Ġ.	1.5 gpm (5.7 L/min) (STD)	322.70	Chrome

- Wall installation 8" centers
- 6" long spout, swings 360° Cast body
- Vandal resistant handles
- Red/blue indicators
- LESS Integral Stops
- CER-TECK° cartridges
- For commercial use only
- R* = Optional gooseneck spout dimensions: R2 = 4.5" long
 - R7 = 9" long

CER-TECK° 28C4 with 6" Gooseneck Spout - 4" (102 mm) Blade Handle with Sanitary Hood

Model		Flow	Price	Finish
28C4924	E	1.5 gpm (5.7 L/min) (VRLAM)	353.50	Chrome
28C4934	E	1.5 gpm (5.7 L/min) (VR)	342.80	Chrome
28C4934-AC-R2	E	1.5 gpm (5.7 L/min) (VR)	431.20	Chrome
28C4934-R2	E	1.5 gpm (5.7 L/min) (VR)	348.95	Chrome
28C4934-R7	E	1.5 gpm (5.7 L/min) (VR)	370.65	Chrome
28C4944	E	1.5 gpm (5.7 L/min) (STD)	338.60	Chrome

- Wall installation 8" centers • 6" long spout, swings 360°
- Cast body
- Vandal resistant handles
- Red/blue indicators
- LESS Integral Stops • CER-TECK° cartridges
- For commercial use only • R* = Optional gooseneck
- spout dimensions: R2 = 4.5" long R7 = 9" long

28C6933-AC

2 = Vandal resistant laminar outlet (VRLAM)

3 = Vandal resistant aerator (VR)

4 = Standard aerator outlet (STD)

Handle

3 = Hooded lever

4 = Blade w/sanitary hood

353.60

Price Finish

435.90 Chrome

381.55 Chrome

349.45 Chrome

Chrome

AC = 5.5" to 10.5" adjustable centers

 \mathbf{R}^* = Optional gooseneck

R7 = 9" long

dimensions.

spout dimensions:

△ DELTA

S* = Optional swing spout S8 = 14" tubular



MODEL NUMBER EXAMPLE:

2 = 8" (203 mm) tubular spout

4 = 11" (279 mm) tubular spout

9 = 6" (152 mm) gooseneck spout

Variation

Configurations vary, see below for availability.

Outlet

CER-TECK® 28C6 with 8" Tubular Spout - 3" (76 mm) Hooded Lever Handle

Model		Flow	Price	Finish	
28C6223	Ł	1.5 gpm (5.7 L/min) (VRLAM)	332.50	Chrome	
28C6233	Ł	1.5 gpm (5.7 L/min) (VR)	321.75	Chrome	
28C6243	Ġ.	1.5 gpm (5.7 L/min) (STD)	317.60	Chrome	

CER-TECK° 28C6 with 8" Tubular Spout – 4" (102 mm) Blade Handle with Sanitary Hood

					-
Model		Flow	Price	Finish	
28C6224	Ġ.	1.5 gpm (5.7 L/min) (VRLAM)	354.60	Chrome	
28C6224-S8	Ŀ	1.5 gpm (5.7 L/min) (VRLAM)	369.80	Chrome	
28C6234	Ł	1.5 gpm (5.7 L/min) (VR)	343.90	Chrome	
28C6244	Ł	1.5 gpm (5.7 L/min) (STD)	339.75	Chrome	

• Wall installation - 8" centers

• Wall installation - 8" centers

•8" long spout, swings 360°

Vandal resistant handles

• WITH integral check stops

Red/blue indicators

 CER-TECK[®] cartridges For commercial use only

- 8" long spout, swings 360°
- Cast body

Cast body

- Vandal résistant handles
- Red/blue indicators
- WITH integral check stops
- CER-TECK® cartridges
- For commercial use only
- $\bullet S^* =$ Optional swing spout dimensions: S8 = 14" tubular



CER-TECK° 28C6 with 11" Tubular Spout - 3" (76 mm) Hooded Lever Handle

Model		Flow	Price	Finish
28C6423	E	1.5 gpm (5.7 L/min) (VRLAM)	337.50	Chrome
28C6433	Ġ.	1.5 gpm (5.7 L/min) (VR)	326.80	Chrome
28C6443	G	1.5 gpm (5.7 L/min) (STD)	322.60	Chrome

- Wall installation 8" centers
- Cast body
- Vandal resistant handles
- CER-TECK[®] cartridges



CER-TECK® 28C6 with 11" Tubular Spout - 4" (102 mm) Blade Handle with Sanitary Hood

Model		Flow	Price	Finish
28C6424	Ł	1.5 gpm (5.7 L/min) (VRLAM)	359.65	Chrome
28C6434	Ł	1.5 gpm (5.7 L/min) (VR)	348.90	Chrome
28C6444	Ġ.	1.5 gpm (5.7 L/min) (STD)	344.75	Chrome

- 11" long spout, swings 360°
- Red/blue indicators
- WITH integral check stops
- For commercial use only
- Wall installation 8" centers
- 11" long spout, swings 360° Cast body
- Vandal resistant handles
- Red/blue indicators
- WITH integral check stops
- CER-TECK° cartridges
- For commercial use only



CER-TECK° 28C6 with 6" Gooseneck Spout - 4" (102 mm) Blade Handle with Sanitary Hood

CER-TECK® 28C6 with 6" Gooseneck Spout - 3" (76 mm) Hooded Lever Handle

Model		Flow	Price	Finish
28C6924	Ġ.	1.5 gpm (5.7 L/min) (VRLAM)	386.50	Chrome
28C6934	Ł	1.5 gpm (5.7 L/min) (VR)	375.75	Chrome
28C6944	Ł.	1.5 gpm (5.7 L/min) (STD)	371.55	Chrome

- Wall installation 8" centers
- 6" long spout, swings 360° Cast body
- Vandal resistant handles
- Red/blue indicators

- For commercial use only

Configurations vary, see below for availability.

28C8183-AC

Variation

0 = 5.5" (140 mm) plain spout* 1 = 8" (203 mm) spout with

top/bottom brace*

*Distance from wall to spout outlet with spout end vacuum breaker

7 = Spout end vacuum breaker w/hose and hanger

8 = Body mounted vacuum breaker

Outlet

Body Mounted Vacuum Breaker

28C8083

Handle 3 = Hooded lever **6** = Spout end vacuum breaker

AC = 5.5" to 10.5" adjustable centers

• Wall installation — 8" centers

Rigid spout

Cast body

 Plain spout Pail hook

Rigid spout

 Pail hook · Garden hose end outlet • CER-TECK° cartridges

 Integral check stops Cast body

 Vandal résistant handles • Red/blue indicators • Spout with top/bottom brace

Not for potable water

371.20 Rough Chrome Plated

Integral check stops

• Red/blue indicators

Vandal resistant handles

· Garden hose end outlet

• CER-TECK° cartridges Not for potable water

• Wall installation — 8" centers



CER-TECK® 28C8 with 5.5" Plain Spout* - Rough Chrome-Plated - 3" (76 mm) Hooded Lever Handle

4.0 gpm (15.1 L/min)

Model		Flow	Price	Finish
Spout End Vacuum E 28C8063	Breaker &	4.0 gpm (15.1 L/min)	361.35	Rough Chrome Plated
Spout End Vacuum E 28C8073	Breaker v	vith Hose and Hanger 4.0 gpm (15.1 L/min)	392.15	Rough Chrome Plated



Sink Faucets

CER-TECK® 28C8 with 8" Spout with Top/Bottom Brace* - Rough Chrome-Plated - 3" (76 mm) Hooded Lever Handle

Model		Flow	Price	Finish
Spout End Vacuum E 28C8163	Breaker &	4.0 gpm (15.1 L/min)	382.35	Rough Chrome Plated
Spout End Vacuum E 28C8173	Breaker v	vith Hose and Hanger 4.0 gpm (15.1 L/min)	413.15	Rough Chrome Plated
Body Mounted Vacuu 28C8183 28C8183-AC	um Breal	4.0 gpm (15.1 L/min) 4.0 gpm (15.1 L/min)	392.20 474.45	Rough Chrome Plated Rough Chrome Plated



Mop Holder for 28C Wallmount Service Sink Faucets

Price Finish Flow 28T910 N/A 75.10 Stainless Steel

- Stainless steel mop holder
 - 3 spring loaded rubber grip holders



C102

48" Hose and Hanger for 28C Wallmount Service Sink Faucets

Model Price Finish 28T911 N/A 41.70 Stainless Steel • 48" hose and stainless steel hanger

*Distance from wall to spout outlet with spout end vacuum breaker.

DELTA COMMERCIAL TECHNICAL SERVICE 1-877-509-2680 ONLINE CATALOGS: www.deltacommercialfaucets.com (Core products ONLY) www.specselect.com (Complete Product Offering & Part Numbering System)



28T9 Service Sink Faucet - Rough Chrome-Plated - Cross Handles

Model	Flow	Price	Finish
28T9	4.0 gpm (15.1 L/min)	186.20	Rough Chrome Plated
28T9-AC	4.0 gpm (15.1 L/min)	216.65	Rough Chrome Plated

- Wall installation 8" centers
- 9.5" long vacuum breaker spout
- Rigid spout with top brace
- Pail hook
- Integral stops
- Cast body
- Cross handles Red/blue indicators
- Hose thread outlet
- in-line vacuum breaker
- Heavy duty cartridges
- AC = adjustable centers 5.5 10.5"
- Not for potable water



28C9LH Service Sink Faucet - Rough Chrome-Plated - 4" (102 mm) Lever Handles

Model		Flow	Price	Finish
28C9LH	Ġ.	4.0 gpm (15.1 L/min)	233.90	Rough Chrome Plated
28C9LH-AC	Ġ.	4.0 gpm (15.1 L/min)	264.35	Rough Chrome Plated

- Wall installation 8" centers • 9.5" long vacuum breaker spout
- Rigid spout with top brace
- Pail hook
- Integral stops
- Cast body
- 4" (102 mm) metal lever handles
- Red/blue indicators
- Hose thread outlet
- In-line vacuum breaker • 1/4 turn ceramic cartridges
- AC = adjustable centers 5.5 10.5"
- Not for potable water



Mop Holder for 28C Wallmount Service Sink Faucets

Model	Flow	Price	Finish
28T910	N/A	75.10	Stainless Steel

- · Stainless steel mop holder
- 3 spring loaded rubber grip holders



48" Hose and Hanger for 28C Wallmount Service Sink Faucets

Model Price Finish Flow 28T911 N/A 41.70 Stainless Steel • 48" hose and stainless steel hanger

33T260



Grid Strainer	r with Overflow Holes			
				ı
Model	Flow	Price	Finish	

23.30 Chrome

Price Finish

48.00 Chrome

N/A

• 1-1/4" grid strainer

Cast brass body

Overflow holes



Grid Strainer - Less Overflow Holes

Model Flow Price Finish 33T260-1 N/A 27.45 Chrome

- 1-1/4" grid strainer
- Cast brass body
- Less overflow holes



Grid Strainer with Drain Cover – Less Overflow Holes

Model Flow Price Finish 33T260-1DC N/A 73.05 Chrome

- 1-1/4" grid strainer with drain cover
- Cast brass body
- Less overflow holes



Offset Grid Strainer with Overflow Holes

Model Flow Price Finish Ė 33T290 N/A 43.75 Chrome

- 1-1/4" offset grid strainer
- Cast brass body
- Overflow holes



Offset Grid Strainer - Less Overflow Holes

Model Flow 33T290-1 Ł N/A

- 1-1/4" offset grid strainer
- Cast brass body
- Less overflow holes



Offset Grid Strainer with Drain Cover - Less Overflow Holes

Model Flow Price Finish E 33T290-1DC N/A 93.00 Chrome

- 1-1/4" offset grid strainer with drain cover
- Cast brass body
- Less overflow holes



♦ DELTA

Offset Grid Strainer with Overflow Holes and Plug and Chain

N/A

Flow

N/A

Model		Flow	Price	Finish
33T295	Ġ.	N/A	48.00	Chrome

- 1-1/4" offset grid strainer with plug and chain Cast brass body
- Overflow holes



Price Finish 33T301 N/A 50.75 Chrome • 1-1/4" cast P trap

Adjustable

Less cleanout

• 1-1/4" cast P trap

 Adjustable With cleanout

Price Finish

52.10 Chrome

Price Finish

64.40 Chrome

Cast P Trap With Cleanout

Cast P Trap With Cleanout

Model 33T360

33T311

• 1-1/2" cast P trap Adjustable

With cleanout

54T5322A-R4

Variation

- 3 = Wall hung double foot pedal valve
- 4 = Floor mounted double foot 3 = Deckmount gooseneck pedal valve

Spout

- $\mathbf{0} = \text{No spout}$, valve ONLY 2 = Wallmount gooseneck

R* = Optional gooseneck spout dimensions: R6 = Deckmount gooseneck - 6" long, 15.25" high0 = No outlet, valve ONLY

4 = Standard aerator outlet (STD)

2 = Vandal resistant laminar outlet (VRLAM)

- 7 = Smooth end, laminar outlet (SELAM)
- Wallmount self-close foot pedal valve
- Double foot pedal
- Wall flanges
- For commercial use only
- R* = Optional gooseneck spout dimensions:



Flow Model Price Finish Valve Only 54T5300A Ġ 582.85 Chrome Wallmount Gooseneck (4.5" long) 54T5322A 720.50 Chrome 54T5324A 705.90 Chrome Wallmount Gooseneck (4.5" long) - Smooth End 54T5327A 720.50 Chrome

- Deckmount Gooseneck (4.5" long, 12.2" high)
- ⑤ 1.5 gpm (5.7 L/min) (VRLAM) 54T5332A 689.35 Chrome 54T5334A 674.70 Chrome
- Deckmount Gooseneck (4.5" long, 12.2" high) Smooth End

Wall Hung Double Pedal Valve with Inlet/Outlet Stops

54T5337A ⑤ 1.0 gpm (3.8 L/min) (SELAM) 689.35 Chrome

- Integral inlet/outlet stops
- R6 = Deckmount gooseneck 6" long,15.25" high



Surgeon Scrub-Up

Floor Mounted Double Pedal Valve

Model	Flow	Price	Finish	
Valve Only				
54T5400A	N/A	351.20	Chrome	
Deckmount Cocconcel (4 Ellione 12 2ll bink)				

- Deckmount Gooseneck (4.5" long, 12.2" high)
- 1.5 gpm (5.7 L/min) (VRLAM) 54T5432A 457.70 Chrome 54T5434A 1.5 gpm (5.7 L/min) (STD) 443.05 Chrome
- Deckmount Gooseneck (4.5" long, 12.2" high) Smooth End
- 54T5437A 1.0 gpm (3.8 L/min) (SELAM) 457.70 Chrome
- Deckmount Gooseneck (6" long, 15.25" high)
- 54T5432A-R6 1.5 gpm (5.7 L/min) (VRLAM) 469.30 Chrome

- Double foot pedal
- No stops
- For commercial use only
- R6 = Deckmount gooseneck 6" long,15.25" high

Floor	mountea	seit ciose	1001	pedai vaive	
Dak	la faat aa	امام			

• R* = Optional gooseneck spout dimensions:

TUF-TECK® Wallmount Pre-Rinse Faucet - 3" (76 mm) Hooded Lever Handles

Model		Flow	Price	Finish
55P1513	Ġ.	1.05 gpm (4.0 L/min)	561.30	Chrome

1.05 gpm (4.0 L/min)

- $S^* = Optional swing spout$ dimensions:
- S7 = 11" Tubular S8 = 14" Tubular
- 2-hole 4" installation OR 3-hole 8" installation CER-TECK® 55C Deckmount Pre-Rinse Faucet - 3" (76 mm) Hooded Lever Handles Cast body
 - Vandal resistant handles
 - Red/blue indicators
 - 1/2" IPS shanks • Inlet tails to prevent crossflow
 - High pressure hose
 - Stainless steel hose shield
 - 12" wall bracket
 - Insulated spray head w/hook • Add-on faucet: 1.5 gpm (5.7 L/min)
 - 1.75" max. deck thickness
 - CER-TECK° cartridges
 - For commercial use only
 - S* = Optional swing spout dimensions: S7 = 11" Tubular
 - S8 = 14" Tubular



⚠ DELTA

Variation

MODEL NUMBER EXAMPLE:

2 = 8" (203 mm) Deckmount

3 = 4" (102 mm) Deckmount

5 = 8" (203 mm) Wallmount

Configurations vary, see below for availability.

Model

55C1213

55C1283

55C1313

55C1383

55C1583-S8

55C1283-S8

8" (203 mm) Centers

4" (102 mm) Centers

CER-TECK® 55C Wallmount Pre-Rinse Faucet — 3" (76 mm) Hooded Lever Handles Cast body

Model		Flow	Price	Finish	
55C1513	F	1.05 gpm (4.0 L/min)	717.00	Chrome	
With Add-On Faucet					
55C1583	Ġ.	1.05 gpm (4.0 L/min)	886.80	Chrome	
55C1583-S7	Ġ.	1.05 gpm (4.0 L/min)	896.50	Chrome	

55C1583-S8

1 = Spray with spring loaded S/S hose, auto shut-off

8 = Same as #1 outlet, but with Add-on faucet

Flow

1.05 gpm (4.0 L/min)

1.05 gpm (4.0 L/min)

1.05 gpm (4.0 L/min)

5. 1.05 gpm (4.0 L/min)

1.05 gpm (4.0 L/min)

F

Ġ

8" (203 mm) Centers with Add-On Faucet

4" (102 mm) Centers with Add-On Faucet

Handle

Price Finish

680.00 Chrome

849.80 Chrome

864.70 Chrome

609.35 Chrome

779.10 Chrome

901.65 Chrome

3 = 3" (76 mm) Hooded lever

• Wall installation - 8" centers

- Vandal resistant handles
- Red/blue indicators • High pressure hose
- · Stainless steel hose shield
- Integral check stops
- 12" wall bracket, thin wall kit
- Insulated spray head w/hook
- Add-on faucet: 1.5 gpm (5.7 L/min)
- CER-TECK[®] cartridges
- For commercial use only
- $S^* = Optional$ swing spout dimensions:
- S7 = 11" Tubular
- S8 = 14" Tubular



Model		Flow	Price	Finish	
55P1513	Ł	1.05 gpm (4.0 L/min)	561.30	Chrome	

- 8" wallmount pre-rinse Less wall bracket
- Less thin wall kit
- Less water/energy spray plate
- TUF-TECK° cartridges
- For commercial use only



Add-On Faucet - 3" (76 mm) Hooded Lever Handle

Model		Flow	Price	Finish
55C1090	Ł	1.5 gpm (5.7 L/min)	184.65	Chrome

- Add-on faucet for use with pre-rinse faucet • 8" tubular spout
- For commercial use only



Wall Bracket

Model

55P1000

• 0 - 12" wall bracket ONLY

Flow Price Finish N/A 54.45 Chrome

87T910



Push-Button Metering Faucet - Single Hole

Model	Flow	Price	Finish
87T104	0.5 gpm (1.9 L/min)	159.60	Chrome
87T904	0.35 gpm (1.3 L/min)	159.60	Chrome
With Mixing Tee 87T110	0.5 gpm (1.0 L/min)	195.90	Chromo
8/1110	0.5 gpm (1.9 L/min)	195.90	Chrome

0.35 gpm (1.3 L/min)

195.90 Chrome

- 1-hole installation
- Cast brass body
- Vandal resistant push button
- Metering, slow-close push button
- 2.5" max deck thickness
- Vandal resistant spray outlet



ADA Lever Handle Metering Faucet - Single Hole

Model		Flow	Price	Finish
87T105	Ł	0.5 gpm (1.9 L/min)	170.75	Chrome
87T905	Ł	0.35 gpm (1.3 L/min)	170.75	Chrome
With Mixing Tee				
87T111	Ġ.	0.5 gpm (1.9 L/min)	207.70	Chrome
87T911	E	0.35 gpm (1.3 L/min)	207.70	Chrome

- ullet 1-hole installation
- · Cast brass body
- Vandal resistant ADA lever handle
- Metering, slow-close lever
- 2.5" max deck thickness
- Vandal resistant spray outlet



ADA Lever Handle Metering Faucet — 4" Cast Centerset

Model		Flow	Price	Finish	
86T1153	Ł.	0.5 gpm (1.9 L/min)	283.25	Chrome	
With Open Grid	l Strainer				
86T1053	Ġ.	0.5 gpm (1.9 L/min)	301.00	Chrome	
86T1093	Ł.	0.35 gpm (1.3 L/min)	301.00	Chrome	

- 2-hole 4" installation
- Cast brass body
- Vandal resistant ADA lever handle
- Metering, slow-close lever
- Red/blue indicators
- 2.38" max deck thickness
- Vandal resistant spray outlet



Push-Button Metering Faucet - Single Hole

Model	Flow	Price	Finish
86T1104	0.5 gpm (1.9 L/min)	158.20	Chrome
86T1194	0.35 gpm (1.3 L/min)	158.20	Chrome
With 86T151 Coverplate			
86T0104	0.5 gpm (1.9 L/min)	180.85	Chrome
86T0194	0.35 gpm (1.3 L/min)	180.85	Chrome

- 1-hole installation
- Cast brass body
- Vandal resistant push button • Metering, slow-close, push button
- 1.13" max deck thickness
- Vandal resistant spray outlet



Coverplate for Field Conversion

Model	Flow	Prio	e Finish
86T151	N/A	47.4	15 Chrome

- 4" coverplate
- For use with 86T1104 and 86T1194



Coverplate for Field Conversion

Model	Flow	Price	Finish
37T151	N/A	48.40	Chrom

ONLINE CATALOGS: www.deltacommercialfaucets.com (Core products ONLY)

www.specselect.com (Complete Product Offering & Part Numbering System)

- 4" coverplate
- For use with 87T series metering faucets





♦ DELTA

Washdown Urinal Valve

Model		Flow	Price	Finish
Back Inlet 86T502	Ł	0.5 gpf (1.9 Lpf)	146.25	Chrome
Top Inlet 86T503	Ł	0.5 gpf (1.9 Lpf)	146.25	Chrome
Back Inlet with 86T505	Stop &	0.5 gpf (1.9 Lpf)	175.85	Chrome

- Cast body urinal valve
- For washdown urinal only
- Vandal resistant handle
- Metering, slow close lever style • For 3/4" IP spud
- 1/2" universal FIP/copper sweat inlet • Factory set flow rate, field adjustable
- Installation Warning: Model shown must be installed on a fixture providing sufficient air gap protection against backflow



Accessories for Field Conversion

Model	Flow	Price	Finish
86T610	N/A	73.70	Chrome

• 3/4" outlet tube with vacuum breaker

• For use with 86T502, 86T503 and 86T505

Valve

- **0** = Water closet, 11 1/2" height, top spud 2 = Water closet, 24" height, top spud
- 3 = Urinal
- **6** = Water closet, 24" height, offset top spud 7 = Water closet, 15" height, back spud

- 1 = Trap seal primer or detergent/disinfectant tee
- **5** = Center cover bumper
- **30** = Less stop, with modified tail to fit Sloan°/Zurn° stop

Flush Volume

- **48** = 1.27 gpf (4.8 Lpf) fixed
- **42** = 1.1 gpf (4.2 Lpf) fixed 19 = 0.5 gpf (1.9 Lpf) fixed
- 05 = 0.125 gpf (0.5 Lpf) fixed**Blank** = Adjustable

81T Manual Water Closet Exposed Flush Valve - 11-1/2" Height, Top Spud

	Model		Flow	Price	Finish
	81T201	Ł	1.6 gpf (6 Lpf) (ADJ)	204.15	Chrome
	81T201-1	G	1.6 gpf (6 Lpf) (ADJ)	253.95	Chrome
W!	81T201-30	E	1.6 gpf (6 Lpf) (ADJ)	186.50	Chrome
	81T201-42	Ġ.	1.1 gpf (4.2 Lpf) (FXD)	204.15	Chrome
	81T201-48	E	1.27 gpf (4.8 Lpf) (FXD)	204.15	Chrome
	81T201-5	Ġ.	1.6 gpf (6 Lpf) (ADJ)	219.80	Chrome
	81T201-542	G	1.1 gpf (4.2 Lpf) (FXD)	219.80	Chrome
	81T201-548	E	1.27 gpf (4.8 Lpf) (FXD)	219.80	Chrome

- Manual exposed flush valve
- ADA lever handle
- Vacuum breaker • 1" inlet
- For 1-1/2" spud water closet fixture
- ADJ = field adjustable
- \bullet FXD = fixed flow
- Options/Add-Ons:
- 1 = Trap seal primer or detergent/disinfectant tee
- 5 = Center bumper on valve
- 30 = Less stop, with modified tail to fit Sloan*/Zurn* stop



81T Manual Water Closet Exposed Flush Valve — 24" Height, Top Spud

Model		Flow	Price	Finish
81T221	Ġ.	1.6 gpf (6 Lpf) (ADJ)	223.05	Chrome
81T221-48	F	1.27 gpf (4.8 Lpf) (FXD)	223.05	Chrome

- Manual exposed flush valve
- ADA lever handle
- Vacuum breaker
- 1" inlet
- For 1-1/2" spud water closet fixture
- ADJ = field adjustable
- FXD = fixed flow



81T Manual Water Closet Exposed Flush Valve — 24" Height, Offset Tube, Top Spud

Model		Flow	Price	Finis
81T261	Ł	1.6 gpf (6 Lpf) (ADJ)	321.85	Chron

- Manual exposed flush valve ADA lever handle
- Vacuum breaker
- 1" inlet
- For 1-1/2" spud water closet fixture
- ADJ = field adjustable
- FXD = fixed flow



C110

81T Manual Water Closet Exposed Flush Valve — 15" Height, Back Spud

Model		Flow	Price	Finish
81T271	F	1.6 gpf (6 Lpf) (ADJ)	231.10	Chrome

- Manual exposed flush valve • ADA lever handle
- Vacuum breaker
- 1" inlet
- For 1-1/2" spud water closet fixture
- ADJ = field adjustable
- FXD = fixed flow

-42 models recommended for new contruction only.

Sloan° is a registered trademark of the Sloan Valve Company. Zurn° is a registered trademark of Zurn Industries, LLC.



⚠ DELTA

81T Manual Urinal Exposed Flush Valve –	13" Height,	Top Spud
---	-------------	----------

Model		Flow	Price	Finish
81T231	Ġ.	0.5 gpf (1.9 Lpf) (ADJ)	204.15	Chrome
81T231-05	<u>ය</u> 💿	0.125 gpf (0.5 Lpf) (FXD)	204.15	Chrome
81T231-19	હ 📀	0.5 gpf (1.9 Lpf) (FXD)	204.15	Chrome
81T231-30	Ġ.	0.5 gpf (1.9 Lpf) (ADJ)	186.50	Chrome

- Manual exposed flush valve
- ADA lever handle
- Vacuum breaker
- 3/4" copper sweat inlet
- for 3/4" spud urinal fixture
- ADJ = field adjustable • FXD = fixed flow
- Options/Add-Ons:
- 30 = Less stop, with modified tail to fit Sloan°/Zurn° stop




Accessories for Field Conversion

Accessories for Field Conversion

lodel	Flow	Price	Finish
60115A	N/A	67.75	Chrom

• 3/4" dia. brass adjustable split ring hanger

• 1-1/2" dia. brass adjustable split ring hanger



el	Flow	Price	Finish
17A	N/A	82.00	Chrom

Sloan° is a registered trademark of the Sloan Valve Company. Zurn° is a registered trademark of Zurn Industries, LLC.

• FXD = fixed flow

• ADJ = field adjustable

• 1" inlet

• For 1-1/2" spud water closet fixture • ADJ = field adjustable

FXD = fixed flow

83T140-48

Configurations vary, see below for availability. Fixture Type 0 = 1 1/2" FIP back spud

 $1 = 1 \frac{1}{2}$ " wall hung back inlet $2 = 1 \frac{1}{2}$ " freestanding back inlet

MODEL NUMBER EXAMPLE:

 $3 = 1 \frac{1}{2}$ " top inlet 4 = 3/4" back spud

Valve $\mathbf{0} = Prison$ 3 = Urinal

 $\mathbf{0} = 5/8$ " push button 1 = ADA oscillating handle 4 = Water closet

Handle

Price Finish

359.05 Chrome

Flush Volume **48** = 1.27 gpf (4.8 Lpf) fixed **Blank** = Adjustable

Flush Valves

83T Manual Water Closet Concealed Flush Valve with Push Button - F.I.P. Penal Back Spud

Model Flow Price Finish 83T000 1.6 gpf (6 Lpf) (ADJ) 329.05 Chrome • Manual concealed flush valve

• 5/8" vandal resistant push button Vacuum breaker

• 1" inlet

• For 1-1/2" prison water closet fixture

• ADJ = field adjustable

• FXD = fixed flow



83T Manual Water Closet Concealed Flush Valve with Push Button - Wall Hung Back Spud

Model Price Finish 83T140 1.6 gpf (6 Lpf) (ADJ) 309.55 Chrome 83T140-48 1.27 gpf (4.8 Lpf) (FXD) 309.55 Chrome · Manual concealed flush valve

• 5/8" vandal resistant push button

Vacuum breaker

• 1" inlet

• For 1-1/2" spud water closet fixture

• ADJ = field adjustable

• FXD = fixed flow



83T Manual Water Closet Concealed Flush Valve with Push Button - Free Standing Back Spud

Model Price Finish 83T240 341.10 Chrome 1.6 gpf (6 Lpf) (ADJ)

Manual concealed flush valve

• 5/8" vandal resistant push button Vacuum breaker

• For 1-1/2" spud water closet fixture

• ADJ = field adjustable

FXD = fixed flow



 Manual concealed flush valve • 5/8" vandal resistant push button

Vacuum breaker

• 1" inlet

• For 1-1/2" spud water closet fixture

• ADJ = field adjustable

FXD = fixed flow



83T340

83T Manual Water Closet Concealed Flush Valve with ADA Handle - Wall Hung Back Spud

1.6 gpf (6 Lpf) (ADJ)

Model Price Finish 83T141 1.6 gpf (6 Lpf) (ADJ) 326.85 Chrome Manual concealed flush valve ADA oscillating handle

Vacuum breaker

• For 1-1/2" spud water closet fixture

• ADJ = field adjustable

• FXD = fixed flow



♦ DELTA

83T Manual Urinal Concealed Flush Valve with Push Button — Back Spud

1.6 gpf (6 Lpf) (ADJ)

83T Manual Water Closet Concealed Flush Valve with ADA Handle

1.6 gpf (6 Lpf) (ADJ)

Flow

Ġ

83T Manual Water Closet Concealed Flush Valve with ADA Handle — Top Spud

- Free Standing Back Spud

Model

83T241

Model

83T341

Accessories

Model

9T400

Model Price Finish 83T430 0.5 gpf (1.9 Lpf) (ADJ) 347.90 Chrome • Manual concealed flush valve Back spud

• 5/8" vandal resistant push button Vacuum breaker

• 3/4" inlet

• For 3/4" spud urinal fixture • ADJ = field adjustable

• FXD = fixed flow



83T Manual Urinal Concealed Flush Valve with ADA Handle — Back Spud

Model Price Finish 83T431 0.5 gpf (1.9 Lpf) (ADJ) 341.10 Chrome Back spud ADA oscillating handle

• Vacuum breaker

• 3/4" inlet

• For 3/4" spud urinal fixture

Manual concealed flush valve

• ADJ = field adjustable • FXD = fixed flow

165.20 Stainless Steel

Price Finish

351.85 Chrome

Price Finish

379.60 Chrome



Flow Price Finish

N/A

• 12" x12" access frame with 14" x14" Stainless

DELTA COMMERCIAL TECHNICAL SERVICE 1-877-509-2680 ONLINE CATALOGS: www.deltacommercialfaucets.com (Core products ONLY) www.specselect.com (Complete Product Offering & Part Numbering System)

C113

Valve

0 = Water closet, 11-1/2" height

3 = Urinal, 13" height

SP = Solar

Options

DF = Dual flush

MM0 = Mechanical manual override

Flush Volume

48 = 1.27 gpf (4.8 Lpf) fixed

42 = 1.1 gpf (4.2 Lpf) fixed19 = 0.5 gpf (1.9 Lpf) fixed

05 = 0.125 gpf (0.5 Lpf) fixed

Blank = Adjustable

81T Solar Electronic Water Closet Flush Valve — 11-1/2" Height

Model		Flow	Price	Finish
81T201SP-42-MM0	ક 💿	1.1 gpf (4.2 Lpf) (FXD)	721.35	Chrome
81T201SP-48-MM0	હ 🚳	1.27 gpf (4.8 Lpf) (FXD)	721.35	Chrome
81T201SP-DF-MM0	E	1.6 gpf (6 Lpf) (ADJ)	721.35	Chrome
81T201SP-MM0	Ł	1.6 gpf (6 Lpf) (ADJ)	721.35	Chrome

• Solar electronic exposed flush valve

Hands-free operation

• Top mounted electronic sensor and solar module Vacuum breaker

• 1" inlet

• For 1-1/2" top spud water closet fixture

 Batteries required and included • ADJ = field adjustable

FXD = fixed flow

• Options/Add-Ons:

DF = Dual flush set to ON, full flush or 30% reduced flush

MMO = Mechanical manual override



81T Solar Electronic Urinal Flush Valve - 13" Height

Model		Flow	Price	Finish
81T231SP-05-MM0	<u>k</u>	0.125 gpf (0.5 Lpf) (FXD)	721.35	Chrome
81T231SP-19-MM0	<u>k</u> 💿	0.5 gpf (1.9 Lpf) (FXD)	721.35	Chrome
81T231SP-MM0	Ł	0.5 gpf (1.9 Lpf) (ADJ)	721.35	Chrome

- Solar electronic exposed flush valve · Hands-free operation
- Top mounted electronic sensor and solar module
- Vacuum breaker
- 3/4" copper sweat inlet
- For 3/4" top spud urinal fixture Batteries required and included
- ADJ = field adjustable
- FXD = fixed flow
- Options/Add-Ons:

MMO = Mechanical manual override



MODEL NUMBER EXAMPLE:

81T201BTA-48-MM0-BL-

BT = Battery operated

2 = Water closet, 24" height 3 = Urinal, 13" height

HW = Hardwire operated

Options

20 = Less stop

 $\mathbf{30} = \text{Less stop}$, with modified tail to

BL = Matte Black w/Chrome Blank = Chrome

fit Sloan°/Zurn° stop $\mathbf{DF} = \mathbf{Dual} \ \mathbf{flush}$

Finish

MM0 = Mechanical manual override

Flush Volume

48 = 1.27 gpf (4.8 Lpf) fixed

42 = 1.1 gpf (4.2 Lpf) fixed

19 = 0.5 gpf (1.9 Lpf) fixed

05 = 0.125 gpf (0.5 Lpf) fixed

Blank = Adjustable



81T H₂Optics[®] Sensing Technology Electronic Water Closet Flush Valve — 11 1/2" Height

Model		Flow	Price	Finish
Battery Operated				
81T201BTA	Ė	1.6 gpf (6 Lpf) (ADJ)	596.70	Chrome
81T201BTA-20	Ė	1.6 gpf (6 Lpf) (ADJ)	568.35	Chrome
81T201BTA-30-MM0	Ė	1.6 gpf (6 Lpf) (ADJ)	568.35	Chrome
81T201BTA-42-MM0	Ł 🧖	1.1 gpf (4.2 Lpf) (FXD)	596.70	Chrome
81T201BTA-42-MM0-BL	<u>t</u>	1.1 gpf (4.2 Lpf) (FXD)	716.00	Matte Black w/Chrom
81T201BTA-48	ક્ષ	1.27 gpf (4.8 Lpf) (FXD)	596.70	Chrome
81T201BTA-48-MM0	કિ 🔇	1.27 gpf (4.8 Lpf) (FXD)	596.70	Chrome
81T201BTA-48-MM0-BL	<u>t</u>	1.27 gpf (4.8 Lpf) (FXD)	716.00	Matte Black w/Chron
81T201BTA-DF	Ġ	1.6 gpf (6 Lpf) (ADJ)	596.70	Chrome
81T201BTA-MM0	Ġ	1.6 gpf (6 Lpf) (ADJ)	596.70	Chrome
81T201BTA-MMO-BL	Ł	1.6 gpf (6 Lpf) (ADJ)	716.00	Matte Black w/Chron
Hardwire Operated				
81T201HWA	Ė	1.6 gpf (6 Lpf) (ADJ)	648.55	Chrome
81T201HWA-20	Ė	1.6 gpf (6 Lpf) (ADJ)	620.10	Chrome
81T201HWA-42-MM0	કિ 🔇	1.1 gpf (4.2 Lpf) (FXD)	648.55	Chrome
81T201HWA-42-MMO-BL	ક્ષ	1.1 gpf (4.2 Lpf) (FXD)	778.30	Matte Black w/Chron
81T201HWA-48	<u>t</u>	1.27 gpf (4.8 Lpf) (FXD)	648.55	Chrome
81T201HWA-48-MM0-BL	<u>t</u>	1.27 gpf (4.8 Lpf) (FXD)	778.30	Matte Black w/Chron
81T201HWA-DF	Ė	1.6 gpf (6 Lpf) (ADJ)	648.55	Chrome
81T201HWA-MMO-BL	Ė	1.6 gpf (6 Lpf) (ADJ)	778.30	Matte Black w/Chron

- Electronic exposed flush valve Hands-free operation
- · Body mounted sensor
- Vacuum breaker
- 1" inlet
- For 1-1/2" top spud water closet fixture
- · Hardwire models, order transformer separately
- Battery operated, batteries included
- ADJ = field adjustable
- FXD = fixed flow
- Options/Add-Ons:
- 20 = Less stop
- 30 = Less stop, with modified tail to fit
- Sloan°/Zurn° stop
- DF = Dual flush set to ON, full flush or 30% reduced flush
- MMO = Mechanical manual override

81T H₂Optics[®] Sensing Technology Electronic Water Closet Flush Valve — 24" Height

err ngepuee eenem	g recimenegy income mater energy			
Model	Flow	Price	Finish	
Battery Operated				
81T221BTA	 1.6 gpf (6 Lpf) (ADJ)	611.90	Chrome	
81T221BTA-48	★ ③ 1.27 gpf (4.8 Lpf) (FXD)	611.90	Chrome	
81T221BTA-DF	と 1.6 gpf (6 Lpf) (ADJ)	611.90	Chrome	
Hardwire Operated				
81T221HWA	<u></u> 1.6 gpf (6 Lpf) (ADJ)	663.80	Chrome	
81T221HWA-48	★ ③ 1.27 gpf (4.8 Lpf) (FXD)	663.80	Chrome	
81T221HWA-DF	と 1.6 gpf (6 Lpf) (ADJ)	663.80	Chrome	

- Electronic exposed flush valve
- Hands-free operation
- Body mounted sensor
- Vacuum breaker
- For 1-1/2" top spud water closet fixture
- Hardwire models, order transformer separately
- Battery operated, batteries included • ADJ = field adjustable
- FXD = fixed flow
- Options/Add-Ons: DF = Dual flush set to ON, full flush or

30% reduced flush

-42 models recommended for new construction ONLY.

Sloan° is a registered trademark of the Sloan Valve Company. Zurn° is a registered trademark of Zurn Industries, LLC.

⁻⁴² models recommended for new construction ONLY.





81T H₂Optics[®] Sensing Technology Electronic Urinal Flush Valve — 13" Height

orr myophico conomy	, 10011110	rogy Electronic Crinal Flash	14.110 10	
Model		Flow	Price	Finish
Battery Operated				
81T231BTA	Ġ.	0.5 gpf (1.9 Lpf) (ADJ)	596.70	Chrome
81T231BTA-05	გ 📀	0.125 gpf (0.5 Lpf) (FXD)	596.70	Chrome
81T231BTA-05-MM0	<u>გ</u>	0.125 gpf (0.5 Lpf) (FXD)	596.70	Chrome
81T231BTA-05-MM0-BL	გ 📀	0.125 gpf (0.5 Lpf) (FXD)	716.00	Matte Black w/Chrome
81T231BTA-19	გ 📀	0.5 gpf (1.9 Lpf) (FXD)	596.70	Chrome
81T231BTA-20	Ġ.	0.5 gpf (1.9 Lpf) (ADJ)	568.35	Chrome
81T231BTA-30-MM0	Ġ.	0.5 gpf (1.9 Lpf) (ADJ)	568.35	Chrome
81T231BTA-MM0	Ġ.	0.5 gpf (1.9 Lpf) (ADJ)	596.70	Chrome
81T231BTA-MM0-BL	Ł	0.5 gpf (1.9 Lpf) (ADJ)	716.00	Matte Black w/Chrome
Hardwire Operated				
81T231HWA	Ġ.	0.5 gpf (1.9 Lpf) (ADJ)	648.55	Chrome
81T231HWA-05	გ 📀	0.125 gpf (0.5 Lpf) (FXD)	648.55	Chrome
81T231HWA-05-MM0-BL	გ 💇	0.125 gpf (0.5 Lpf) (FXD)	778.30	Matte Black w/Chrome
81T231HWA-19	გ 📀	0.5 gpf (1.9 Lpf) (FXD)	648.55	Chrome
81T231HWA-MM0-BL	Ġ.	0.5 gpf (1.9 Lpf) (ADJ)	778.30	Matte Black w/Chrome

- Electronic exposed flush valve
- Hands-free operation
- Body mounted sensor
- Vacuum breaker
- 3/4" copper sweat inlet
- For 3/4" top spud urinal fixture
- Hardwire models, order transformer separately
- Battery operated, batteries included
- ADJ = field adjustable FXD = fixed flow
- Options/Add-Ons:

20 = Less stop

30 = Less stop, with modified tail to fit Sloan°/Zurn° stop

MMO = Mechanical manual override



81T H₂Optics[®] Sensing Technology Electronics Retrofit Kits

Model		Flow	Price	Finish
81TURBTRKA	Ġ	0.5 gpf (1.9 Lpf) (ADJ)	428.55	Chrome
81TWCBTRKA	Ė	1.6 gpf (6 Lpf) (ADJ)	428.55	Chrome
81TWCBTRKA-6	Ł	1.6 gpf (6 Lpf) (FXD)	428.55	Chrome

- Head assembly ONLY
- Less body, stop, outlet tubing
- · Battery operated, batteries included
- If hardwire required, order 061069A separately



Accessories for Field Conversion

Model	Flow	Price	Finish
061047A	N/A	61.75	N/A

- Hardwire converter with battery backup
- Order separately

Sloan° is a registered trademark of the Sloan Valve Company. Zurn° is a registered trademark of Zurn Industries, LLC. See page C145 for available transformers.



△ DELTA

Configurations vary, see below for availability.

81T201-48-WMSHWA

Valve 0 = Water closet 3 = Urinal

Flush Volume **48** = 1.27 gpf (4.8 Lpf) fixed 42 = 1.1 gpf (4.2 Lpf) fixed19 = 0.5 gpf (1.9 Lpf) fixed05 = 0.125 gpf (0.5 Lpf) fixed**Blank** = Adjustable



81T H₂Optics^e Sensing Technology Electronic Water Closet Flush Valve — 11 1/2" Height

Model		Flow	Price	Finish
81T201-42-WMSHWA	ક્ષ 💿	1.1 gpf (4.2 Lpf) (FXD)	807.35	Chrome
81T201-48-WMSHWA	દ 💿	1.27 gpf (4.8 Lpf) (FXD)	807.35	Chrome
81T201-WMSHWA	E	1.6 gpf (6 Lpf) (ADJ)	807.35	Chrome

- Electronic exposed flush valve
- Hands-free operation • 11 1/2" high
- 4" wallmount sensor
- Vacuum breaker
- 1" inlet
- For 1-1/2" top spud water closet fixture
- Hardwire operated, order transformer separately
- ADJ = field adjustable
- FXD = fixed flow



81T H₂Optics[®] Sensing Technology Electronic Urinal Flush Valve — 13" Height

Model		Flow	Price	Finish
81T231-05-WMSHWA	৬ 💿	0.125 gpf (0.5 Lpf) (FXD)	807.35	Chrome
81T231-19-WMSHWA	৳ 💿	0.5 gpf (1.9 Lpf) (FXD)	807.35	Chrome
81T231-WMSHWA	Ł	0.5 gpf (1.9 Lpf) (ADJ)	807.35	Chrome

- Electronic exposed flush valve
- Hands-free operation • 4" wallmount sensor
- 13" high
- · Vacuum breaker
- 3/4" copper sweat inlet • For 3/4" top spud urinal fixture
- Hardwire operated, order transformer separately
- ADJ = field adjustable
- FXD = fixed flow



Accessories for Field Conversion

Model	Flow	Price	Finish
061047A	N/A	61.75	N/A

- Hardwire converter with battery backup Order separately

Accessories for Field Conversion

Model	Flow	Price	Finish
061299A	N/A	55.95	N/A

- Battery operated conversion kit
- Batteries included
- Order hardwire flush valve AND 061299A as separate order

⁻⁴² models recommended for new construction ONLY.

⁻⁴² models recommended for new construction ONLY. See page C145 for available transformers.

stainless steel cover

MODEL NUMBER EXAMPLE:

Configurations vary, see below for availability.

1600T6103ATR-6

Fixture Type

- 1 = Wallhung water closet, back inlet
- 2 = Freestanding water closet, back inlet
- 3 = Water closet, top inlet 4 = Urinal, back inlet, syphon jet

Control Box

2 = 12" x 18" frame w/cover 3 = 12" frame w/cover

4 = 4" box

Trim/Rough-In **TR** = Trim (requires separate order of rough-in with same flow

407.55 Stainless Steel

RI = Rough-in (requires separate order of trim with same flow for

for complete product) complete product)

Flush Volume

48 = 1.27 gpf (4.8 Lpf) fixed **42** = 1.1 gpf (4.2 Lpf) fixed 19 = 0.5 gpf (1.9 Lpf) fixed05 = 0.125 gpf (0.5 Lpf) fixed

Blank = Adjustable

1600T6 H₂Optics' Sensing Technology Electronic Flush Valve Trim ONLY - For Back Inlet Water Closet, Wall Hung Fixture

(Must order rough-in number separately AND trim for complete product. Use same flow.)

Model		Flow	Price	Finish
12" x 18" Frame wi	ith 14" x 2	0" Cover		
1600T6102ATR	Ł	1.6 gpf (6 Lpf) (ADJ)	538.90	Stainless Steel
1600T6102ATR-42	৳ 💿	1.1 gpf (4.2 Lpf) (FXD)	538.90	Stainless Steel
1600T6102ATR-48	৬ 📀	1.27 gpf (4.8 Lpf) (FXD)	538.90	Stainless Steel
12" Frame with 14' 1600T6103ATR 1600T6103ATR-48	' Cover & & ©	1.6 gpf (6 Lpf) (ADJ) 1.27 gpf (4.8 Lpf) (FXD)	532.30 532.30	Stainless Steel Stainless Steel
4" Box with 4 1/2" 1600T6104ATR	Cover	1.6 gpf (6 Lpf) (ADJ)	407.55	Stainless Steel

Electronic concealed flush valve trim

- Requires separate order of BOTH rough-in
- Supplied as sensor, over-ride button and stainless steel cover
- Hands-free operation
- H₂Optics[®] Sensing Technology
- For 1-1/2" back spud
- Hardwire models, order transformer separately
- ADJ = field adjustable
- FXD = fixed flow



1600T6 H₂Optics' Sensing Technology Electronic Flush Valve Rough-In ONLY - For Back Inlet Water Closet, Wall Hung Fixture (Must order trim number separately AND rough-in for complete product. Use same flow.)

1600T6104ATR-48 **(L) (S)** 1.27 gpf (4.8 Lpf) (FXD)

Model		Flow	Price	Finis
12" x 18" Frame w	ith 14" x 2	20" Cover		
1600T6102ARI	Ł	1.6 gpf (6 Lpf) (ADJ)	538.90	N/A
1600T6102ARI-42	કિ 🔇	1.1 gpf (4.2 Lpf) (FXD)	538.90	N/A
1600T6102ARI-48	৳ 🧟	1.27 gpf (4.8 Lpf) (FXD)	538.90	N/A
12" Frame with 14	" Cover			
1600T6103ARI	Ŀ	1.6 gpf (6 Lpf) (ADJ)	532.30	N/A
1600T6103ARI-48	હિં	1.27 gpf (4.8 Lpf) (FXD)	532.30	N/A
4" Box with 4 1/2"	Cover			
1600T6104ARI	Ė	1.6 gpf (6 Lpf) (ADJ)	407.55	N/A
1600T6104ARI-48	চ 🧟	1.27 gpf (4.8 Lpf) (FXD)	407.55	N/A

- or access frame
- Hands-free operation
- ADJ = field adjustable
- FXD = fixed flow

1600T6102ARI	Ŀ	1.6 gpf (6 Lpf) (ADJ)	538.90	N/A			
1600T6102ARI-42	કિ 💿	1.1 gpf (4.2 Lpf) (FXD)	538.90	N/A			
1600T6102ARI-48	৬ 💿	1.27 gpf (4.8 Lpf) (FXD)	538.90	N/A			
12" Frame with 14"	Cover						
1600T6103ARI	Ł	1.6 gpf (6 Lpf) (ADJ)	532.30	N/A			
1600T6103ARI-48	৬ 📀	1.27 gpf (4.8 Lpf) (FXD)	532.30	N/A			
4" Box with 4 1/2" Cover							
1600T6104ARI	Ŀ	1.6 gpf (6 Lpf) (ADJ)	407.55	N/A			

· Electronic concealed flush valve rough

- Requires separate order of BOTH rough-in
- Supplied as complete flush valve, and wall box
- H₂Optics* Sensing Technology
- For 1-1/2" back spud

-42 models	recommended	for ne	w construction	ONLY.



⚠ DELTA

1600T6 H₂Optics* Sensing Technology Electronic Flush Valve Trim ONLY – For Back Inlet Water Closet, Free Standing Fixture

(Must order rough-in number separately AND trim for complete product. Use same flow.)

Model		Flow	Price	Finish		
12" x 18" Frame w	ith 14" x 2	O" Cover				
1600T6202ATR	Ġ.	1.6 gpf (6 Lpf) (ADJ)	571.70	Stainless Steel		
1600T6202ATR-48	<u>k</u> 📀	1.27 gpf (4.8 Lpf) (FXD)	571.70	Stainless Steel		
12" Frame with 14	" Cover					
1600T6203ATR	Ġ.	1.6 gpf (6 Lpf) (ADJ)	565.20	Stainless Steel		
1600T6203ATR-48	১ 💿	1.27 gpf (4.8 Lpf) (FXD)	565.20	Stainless Steel		
4" Box with 4 1/2" Cover						
1600T6204ATR	Ł	1.6 gpf (6 Lpf) (ADJ)	440.35	Stainless Steel		
1600T6204ATR-48	১ 🍥	1.27 gpf (4.8 Lpf) (FXD)	440.35	Stainless Steel		

• Hardwire models, order transformer separately • ADJ = field adjustable

• Electronic concealed flush valve trim

• Requires separate order of BOTH rough-in

- FXD = fixed flow

AND trim



1600T6 H₂Optics[®] Sensing Technology Electronic Flush Valve Rough-In ONLY - For Back Inlet Water Closet, Free Standing Fixture (Must order trim number separately AND rough-in for complete product. Use same flow.)

Model	Flow	Price	Finish
12" x 18" Frame w	ith 14" x 20" Cover		
1600T6202ARI	5. 1.6 gpf (6 Lpf) (ADJ)	571.70	N/A
1600T6202ARI-48	& 1.27 gpf (4.8 Lpf) (FXD)	571.70	N/A
12" Frame with 14	" Cover		
1600T6203ARI	占 1.6 gpf (6 Lpf) (ADJ)	565.20	N/A
1600T6203ARI-48	& ③ 1.27 gpf (4.8 Lpf) (FXD)	565.20	N/A
4" Box with 4 1/2"	Cover		
1600T6204ARI	占 1.6 gpf (6 Lpf) (ADJ)	440.35	N/A
1600T6204ARI-48	5 1.27 gpf (4.8 Lpf) (FXD)	440.35	N/A

- · Electronic concealed flush valve rough
- Requires separate order of BOTH rough-in AND trim
- Supplied as complete flush valve, and wall box or access frame
- Hands-free operation
- H₂Optics[®] Sensing Technology
- For 1-1/2" back spud
- ADJ = field adjustable
- FXD = fixed flow

1600T6 H₂Optics' Sensing Technology Electronic Flush Valve Trim ONLY – For Top Inlet Water Closet, Free Standing or Wallhung Fixture (Must order rough-in number separately AND trim for complete product. Use same flow.)

Model	Flow	Price	Finish				
12" x 18" Frame w	th 14" x 20" Cover						
1600T6302ATR	<u></u> 1.6 gpf (6 Lpf) (ADJ)	604.55	Stainless Steel				
1600T6302ATR-48		0) 604.55	Stainless Steel				
12" Frame with 14	' Cover						
1600T6303ATR	<u></u> 1.6 gpf (6 Lpf) (ADJ)	598.00	Stainless Steel				
1600T6303ATR-48	& ③ 1.27 gpf (4.8 Lpf) (FXI	598.00	Stainless Steel				
4" Box with 4 1/2" Cover							
1600T6304ATR	5. 1.6 gpf (6 Lpf) (ADJ)	473.20	Stainless Steel				
1600T6304ATR-48		0) 473.20	Stainless Steel				

- Electronic concealed flush valve trim
- Requires separate order of BOTH rough-in AND trim
- Supplied as sensor, orer-ride button and
- stainless steel cover Hands-free operation
- H₂Optics[®] Sensing Technology
- For 1-1/2" top spud
- Hardwire models, order transformer separately
- ADJ = field adjustable
- FXD = fixed flow



Flush Valves

1600T6 H₂Optics[®] Sensing Technology Electronic Flush Valve Rough-In ONLY - For Top Inlet Water Closet, Free Standing or Wallhung Fixture (Must order trim number separately AND rough-in for complete product. Use same flow.)

Model	Flow	Price	Finish				
12" x 18" Frame with 14	' x 20" Cover						
1600T6302ARI	1.6 gpf (6 Lpf) (ADJ)	604.55	N/A				
1600T6302ARI-48	1.27 gpf (4.8 Lpf) (FXD)	604.55	N/A				
12" Frame with 14" Cov	12" Frame with 14" Cover						
1600T6303ARI	1.6 gpf (6 Lpf) (ADJ)	598.00	N/A				
1600T6303ARI-48	1.27 gpf (4.8 Lpf) (FXD)	598.00	N/A				
4" Box with 4 1/2" Cover							
1600T6304ARI	1.6 gpf (6 Lpf) (ADJ)	473.20	N/A				
1600T6304ARI-48	1.27 gpf (4.8 Lpf) (FXD)	473.20	N/A				

- Electronic concealed flush valve rough
- Requires separate order of BOTH rough-in AND trim
- Supplied as complete flush valve, and wall box or access frame
- Hands-free operation
- H₂Optics[®] Sensing Technology
- For 1-1/2" top spud
- ADJ = field adjustable
- \bullet FXD = fixed flow



△ DELTA

1600T6 H₂Optics' Sensing Technology Electronic Flush Valve Trim ONLY – For Back Inlet Urinal, Syphon Jet Fixture (Must order rough-in number separately AND trim for complete product. Use same flow.)

Model		Flow	Price	Finish
12" x 18" Frame wi	th 14" x 2	O" Cover		
1600T6402ATR	Ŀ	0.5 gpf (1.9 Lpf) (ADJ)	525.70	Stainless Steel
1600T6402ATR-05	<u>t</u>	0.125 gpf (0.5 Lpf) (FXD)	525.70	Stainless Steel
1600T6402ATR-19	৳ 📀	0.5 gpf (1.9 Lpf) (FXD)	525.70	Stainless Steel
12" Frame with 14"	Cover			
1600T6403ATR	Ġ	0.5 gpf (1.9 Lpf) (ADJ)	519.15	Stainless Steel
1600T6403ATR-05	ક્ષ	0.125 gpf (0.5 Lpf) (FXD)	519.15	Stainless Steel
1600T6403ATR-19	৳ 💿	0.5 gpf (1.9 Lpf) (FXD)	519.15	Stainless Steel
4" Box with 4 1/2" (Cover			
1600T6404ATR	Ŀ	0.5 gpf (1.9 Lpf) (ADJ)	394.35	Stainless Steel
1600T6404ATR-05	৬ 📀	0.125 gpf (0.5 Lpf) (FXD)	394.35	Stainless Steel
1600T6404ATR-19	<u>t</u>	0.5 gpf (1.9 Lpf) (FXD)	394.35	Stainless Steel

- Electronic concealed flush valve trim
- Requires separate order of BOTH rough-in AND trim
- Supplied as sensor, orer-ride button and
 - stainless steel cover · Hands-free operation
- H₂Optics* Sensing Technology
- For 3/4" back inlet
- When used for top inlet urinal, exposed tubing, flanges, elbow, etc., supplied by others
- Hardwire models, order transformer separately ADJ = field adjustable
- FXD = fixed flow



1600T6 H₂Optics[®] Sensing Technology Electronic Flush Valve Rough-In ONLY - For Back Inlet Urinal, Syphon Jet Fixture

(Must order trim number separately AND rough-in for complete product. Use same flow.)

					_
Model		Flow	Price	Finish	
12" x 18" Frame w	ith 14" x 20)" Cover			
1600T6402ARI	Ŀ	0.5 gpf (1.9 Lpf) (ADJ)	525.70	N/A	
1600T6402ARI-05	હ 📀	0.125 gpf (0.5 Lpf) (FXD)	525.70	N/A	
1600T6402ARI-19	৳ 📀	0.5 gpf (1.9 Lpf) (FXD)	525.70	N/A	
12" Frame with 14	" Cover				
1600T6403ARI	Ł	0.5 gpf (1.9 Lpf) (ADJ)	519.15	N/A	
1600T6403ARI-05	৬ 📀	0.125 gpf (0.5 Lpf) (FXD)	519.15	N/A	
1600T6403ARI-19	৬ 💿	0.5 gpf (1.9 Lpf) (FXD)	519.15	N/A	
4" Box with 4 1/2"	Cover				
1600T6404ARI	Ł	0.5 gpf (1.9 Lpf) (ADJ)	394.35	N/A	
1600T6404ARI-05	હ 💇	0.125 gpf (0.5 Lpf) (FXD)	394.35	N/A	
1600T6404ARI-19	৳ 🚳	0.5 gpf (1.9 Lpf) (FXD)	394.35	N/A	

- · Electronic concealed flush valve rough
- Requires separate order of BOTH rough-in
- Supplied as complete flush valve, and wall box or access frame
- Hands-free operation
- H₂Optics* Sensing Technology
- For 3/4" back inlet
- When used for top inlet urinal, exposed tubing, flanges, elbow, etc., supplied by others
- ADJ = field adjustable
- FXD = fixed flow



Accessories for Field Conversion

Model	Flow	Price	Finish
061047A	N/A	61.75	N/A

- Hardwire converter with battery backup
- Order separately

Accessories for Field Conversion

Model	Flow	Price	Finish
061299A	N/A	55.95	N/A

- Battery operated conversion kit
- Batteries included
- Order hardwire flush valve AND 061299A as separate order

See page C145 for available transformers.

MODEL NUMBER EXAMPLE: Configurations vary, see below for availability.






1600T9 H₂Optics[®] Technology Electronic Washdown Urinal Valve Trim ONLY — Back Inlet (Must order rough-in number separately AND trim for complete product)

Model		Flow	Price	Finish
1600T9001TR	Ġ.	N/A	420.60	Stainless Steel

- · Electronic concealed valve for washdown urinals
- Requires separate order of BOTH rough-in AND trim
- Hands-free operation
- H₂Optics[®] Sensing Technology · Stainless steel cover with integral sensor
- For back inlet urinal
- Hardwire models, order transformer separately
- Field adjustable



Rough-in ONLY - For Use with Trim (Must order trim number separately AND rough-in for complete product)

lodel		Flow	Price	Finish
600T9001RI	Ł	0.5 gpf (1.9 Lpf)	420.60	N/A


- Rough-in ONLY, for use with back inlet trim
- Recessed 8" box, outlet hose
- Must order TRIM for complete model



1600T9 H₂Optics[®] Technology Electronic Washdown Urinal Valve Trim ONLY — Top Inlet (Must order rough-in number separately AND trim for complete product)

Model		Flow	Price	Finish
1600T9003TR	Ġ.	N/A	407.55	Stainless Ste

- · Electronic concealed valve for washdown urinals
- Requires separate order of BOTH rough-in
- Hands-free operation
- H₂Optics* Sensing Technology
- Stainless steel cover with integral sensor
- For top inlet urinal
- When used for top inlet urinal, exposed tubing, flanges, elbow, etc., supplied by others
- Hardwire models, order transformer separately
- Field adjustable



Rough-in ONLY - For Use with Trim (Must order trim number separately AND rough-in for complete product)

Model		Flow	Price	Finish
1600T9003RI	Ł	0.5 gpf (1.9 Lpf)	407.55	N/A

- Rough-in ONLY, for use with top inlet trim Recessed 8" box
- When used for top inlet urinal, exposed tubing. flanges, elbow, etc., supplied by others
- Must order TRIM for complete model



Accessories for Field Conversion

Model	Flow	Price	Finish
061047A	N/A	61.75	N/A

- Hardwire converter with battery backup
- Order separately



Model Price Finish 061299A N/A 55.95 N/A

- · Battery operated conversion kit
- Batteries included
- Order hardwire flush valve AND 061299A as separate order

Models must be installed on fixtures providing sufficient air gap protection against backflow. See page C145 for available transformers.

DELTA COMMERCIAL TECHNICAL SERVICE 1-877-509-2680 ONLINE CATALOGS: www.deltacommercialfaucets.com (Core products ONLY) www.specselect.com (Complete Product Offering & Part Numbering System)



Power Supply

0 = Hardwire operated

1 = Battery operated

590T0128TR

Configurations vary, see below for availability

MODEL NUMBER EXAMPLE:

1 = Single hole deckmount hi-rise

Surface Mount Box

Hardwire Operated

Model

590T0120

590T0150

590T0190

590T1120

590T1150

590T1190

Battery Operated

(Available as complete models ONLY)

Flow

& 1.5 gpm (5.7 L/min) (VRLAM)

& 1.5 gpm (5.7 L/min) (VRLAM)

0.5 gpm (1.9 L/min) (VRLAM)

0.35 gpm (1.3 L/min) (VRS)

0.5 gpm (1.9 L/min) (VRLAM)

0.35 gpm (1.3 L/min) (VRS)

- 2 = Vandal resistant laminar outlet (VRI AM)
 - **5** = Vandal resistant laminar outlet (VRLAM)
 - 9 = Vandal resistant spray outlet (VRS)

Control Box

Price Finish

620.40 Chrome

620.40 Chrome

620.40 Chrome

620.40 Chrome

620.40 Chrome

620.40 Chrome

- TR ONLY used for recessed box (not required for surface box) **0** = Surface mount box (Available as complete
- model ONLY) 8 = Trim ONLY for recessed box (Must order rough-in number separately AND trim for complete product)



- 5" long, 7" high
- Hands-free activation
- H₂Optics[®] Sensing Technology
- · Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature Mixing valve required
- 2 5" max deck thickness
- Order 060546A for 4" or 060547A for 8" optional coverplates
- Hardwire models, order transformer separately
- · Battery operated, batteries included

Trim ONLY for Recessed Box

(Must order rough-in number separately AND trim for complete product)

	Model		Flow	Price	Finish
	Hardwire Operated				
	590T0128TR	ક્ 💿	1.5 gpm (5.7 L/min) (VRLAM)	317.90	Chrome
	590T0158TR	Ł	0.5 gpm (1.9 L/min) (VRLAM)	317.90	Chrome
EW!	590T0198TR	Ė	0.35 gpm (1.3 L/min) (VRS)	317.90	Chrome
	Battery Operated				
	590T1128TR	ક્ 💿	1.5 gpm (5.7 L/min) (VRLAM)	317.90	Chrome
	590T1158TR	Ł	0.5 gpm (1.9 L/min) (VRLAM)	317.90	Chrome
EW!	590T1198TR	Ł	0.35 gpm (1.3 L/min) (VRS)	317.90	Chrome

- 1 hole installation
- 5" long, 7" high
- Hands-free activation H₂Optics[®] Sensing Technology
- · Adjustable sensing range, auto shut-off,
- metering mode and periodic rinse feature
- 12" S/S cover, driver board, solenoid
- Requires separate order of rough-in for complete product
- Connection from box to spout not supplied
- 2.5" max deck thickness
- Order 060546A for 4" or 060547A for 8" optional
- Hardwire models, order transformer separately
- Battery operated, batteries included



Rough-in ONLY - For Use with Trim (Must order trim number separately AND rough-in for complete product)

Model	Flow	Price	Finish
ELAVT0001ARI	N/A	481.45	N/A

- Rough-in ONLY, NO mixing valve • Recessed mount 10" x 10" box with single inlet
- Must order TRIM for complete model




Rough-in ONLY - For Use with Trim (Must order trim number separately AND rough-in for complete product)

Model	Flow	Price	Finis
ELAVT0008ARI	N/A	715.70	N/A

- Rough-in ONLY, with thermostatic mixing valve
- Recessed mount 10" x 10" box with thermostatic mixing valve
- Must order TRIM for complete model

Accessories	for	Field	Coi	nversion

Model	Flow	Price	Finish
061047A	N/A	61.75	N/A



· Order separately

Accessories for Field Conversion Model Flow

• 3-position switch

• Refer to specification for applicable uses Order separately

• 4" (102 mm) coverplate

• 8" (204 mm) coverplate

Price Finish

216.50 N/A

Coverplate for Field Conversion

060651A

Model	Flow	Price	Finish
060546A	N/A	74.00	Chrome

DELTA COMMERCIAL TECHNICAL SERVICE 1-877-509-2680

ONLINE CATALOGS: www.deltacommercialfaucets.com (Core products ONLY)

www.specselect.com (Complete Product Offering & Part Numbering System)

N/A

Coverplate for Field Conversion

Flow Price Finish 060547A N/A 95.10 Chrome

See page C145 for available transformers.



MODEL NUMBER EXAMPLE:

Configurations vary, see below for availability.

590TPA0120-PI-TR

Power Supply

- **0** = Hardwire operated
- 1 = Battery operated 2 = Plug-in power

- 1 = Single hole deck mount 2 = Vandal resistant laminar hi-rise Agion® antimicrobial finish outlet (VRLAM)
 - **9** = Vandal resistant spray outlet (VRS)

5 = Vandal resistant laminar outlet (VRLAM)

Control Box

- **0** = Surface mount box (Available as complete model ONLY)
- $\mathbf{8} = \text{Trim ONLY for recessed box}$ (Must order rough-in number AND trim, AC filter and transformer separately for complete product)

TR ONLY used for recessed box (not required for surface box)

PI = Plug-in power supply

LP = Less power (Must order PI model separately)



590TPA Surface Mount Box (Available as complete models ONLY)

(aa		/		
Model		Flow	Price	Finish
Hardwire Operated				
590TPA0120	<u>ل</u> م 🐧	1.5 gpm (5.7 L/min) (VRLAM)	603.90	Chrome
590TPA0150	Ł	0.5 gpm (1.9 L/min) (VRLAM)	603.90	Chrome
590TPA0190	Ġ.	0.35 gpm (1.3 L/min) (VRS)	603.90	Chrome
Battery Operated				
590TPA1120	৬ 💿	1.5 gpm (5.7 L/min) (VRLAM)	642.90	Chrome
590TPA1150	Ġ.	0.5 gpm (1.9 L/min) (VRLAM)	642.90	Chrome
590TPA1190	Ł	0.35 gpm (1.3 L/min) (VRS)	642.90	Chrome
Plug-in Power				
590TPA2120-PI	ક્ષ	1.5 gpm (5.7 L/min) (VRLAM)	642.90	Chrome
590TPA2150-PI	Ł	0.5 gpm (1.9 L/min) (VRLAM)	642.90	Chrome
590TPA2190-PI	Ł	0.35 gpm (1.3 L/min) (VRS)	642.90	Chrome
Less Power				
590TPA2120-LP	<u>ل</u> 🐠	1.5 gpm (5.7 L/min) (VRLAM)	612.90	Chrome
590TPA2150-LP	Ġ.	0.5 gpm (1.9 L/min) (VRLAM)	612.90	Chrome
590TPA2190-LP	E	0.35 gpm (1.3 L/min) (VRS)	612.90	Chrome

- 1- hole installation
- 5" long, 7-1/2" high
- Cast hi-rise spout
- Proximity Sensing Technology · Hands-free activation, entire spout is sensor
- Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature
- Mixing valve required
- 3" max deck thickness
- Order 061159A for 4" or 061160A for 8" optional coverplates
- Hardwire, order AC filter and transformer separately
- Battery operated, batteries included
- Plug-in, power supply included
- Less Power, for use with plug-in power model for multiple faucet installation (1-PI plus 2 - 4 LP), ganging/splitter wire supplied on



590TPA Trim ONLY for Recessed Box

(Must order rough-in number separately AND trim for complete product)

Model		Flow	Price	Finish
Hardwire Operated				
590TPA0128TR	გ 🚳	1.5 gpm (5.7 L/min) (VRLAM)	312.70	Chrome
590TPA0158TR	Ġ.	0.5 gpm (1.9 L/min) (VRLAM)	312.70	Chrome
590TPA0198TR	Ġ.	0.35 gpm (1.3 L/min) (VRS)	312.70	Chrome

- 1-hole installation
- 5" long, 7-1/2" high
- Cast hi-rise spout
- Proximity Sensing Technology
- Hands-free activation, entire spout is sensor • Adjustable sensing range, auto shut-off,
- metering mode and periodic rinse feature • 12" S/S cover, driver board, solenoid
- Requires separate order of rough-in for
- complete product
- Connection from box to spout not supplied
- 3" max deck thickness
- Order 061159A for 4" or 061160A for 8" optional coverplates
- Hardwire, order AC filter and transformer
- separately



Rough-in ONLY - For Use with Trim

(Must order trim number separately AND rough-in for complete product)


Model	Flow	Price	Finish
ELAVT0001ARI	N/A	481.45	N/A

- Rough-in ONLY, NO mixing valve
- Recessed mount 10" x 10" box with single inlet
- Must order TRIM for complete model



Rough-in ONLY - For Use with Trim (Must order trim number separately AND rough-in for complete product)

Model	Flow	Price	Finish
ELAVT0008ARI	N/A	715.70	N/A




- Recessed mount 10" x 10" box with thermostatic mixing valve
- Must order TRIM for complete model



Accessories for Field Conversion

Model	Flow	Price	Finish
063268A	N/A	61.75	N/A

- Battery backup for surface mount box
- To convert installed hardwire or plug-in models One battery backup unit required for every
- spout/box
- Order separately



Accessories for Field Conversion

odel	Flow	Price	Finish
63269A	N/A	61.75	N/A

- Battery backup for recessed mount box
- To convert installed hardwire models
- One battery backup unit required for every spout/box
- Order separately



Accessories for Field Conversion

Model	Flow	Price	Finish
063267A	N/A	105.00	N/A

- AC filter (063271A) PLUS 20 VA transformer (060704A)
- Required for hardwire models
- Powers up to 5 units



Accessories for Field Conversion

Model	Flow	Price	Finish
060651A	N/A	216.50	N/A

- 3-position switch
- Refer to specification for applicable uses
- · Order separately



Coverplate for Field Conversion

Model Flow Price Finish 061159A N/A 74.00 Chrome • 4" (102 mm) coverplate



Coverplate for Field Conversion

Price Finish Flow 95.05 Chrome • 8" (203 mm) coverplate

See Page C145 for available transformers.

DELTA COMMERCIAL TECHNICAL SERVICE 1-877-509-2680 ONLINE CATALOGS: www.deltacommercialfaucets.com (Core products ONLY) www.specselect.com (Complete Product Offering & Part Numbering System)



MODEL NUMBER EXAMPLE:

Configurations vary, see below for availability.

591T0228TR

Power Supply


0 = Hardwire operated 1 = Battery operated

2 = 4" (102 mm) cast spout

- 2 = Vandal resistant laminar outlet (VRLAM)
- **9** = Vandal resistant spray outlet (VRS)
- **5** = Vandal resistant laminar outlet (VRLAM)
- **0** = Surface mount box (Available as complete model ONLY)

Control Box

 $\mathbf{8} = \text{Trim ONLY for recessed box}$ (Must order rough-in number separately AND trim for complete product)





Surface Mount Box

(Available as complete models ONLY)

Model		Flow	Price	Finish
Hardwire Operated				
591T0220	હિ. 🚳	1.5 gpm (5.7 L/min) (VRLAM)	620.40	Chrome
591T0250	Ł.	0.5 gpm (1.9 L/min) (VRLAM)	620.40	Chrome
591T0290	Ł	0.35 gpm (1.3 L/min) (VRS)	620.40	Chrome
Battery Operated				
591T1220	હિ 🚳	1.5 gpm (5.7 L/min) (VRLAM)	620.40	Chrome
591T1250	Ġ.	0.5 gpm (1.9 L/min) (VRLAM)	620.40	Chrome
591T1290	Ł	0.35 gpm (1.3 L/min) (VRS)	620.40	Chrome

- 3-hole 4" installation
- 5" long, 5.3" high
- Hands-free activation • H₂Optics[®] Sensing Technology
- · Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature
- Mixing valve required
- 2.5" max deck thickness
- Hardwire models, order transformer separately
- Battery operated, batteries included



Trim ONLY for Recessed Box

(Must order rough-in number separately AND trim for complete product)

	Model		Flow	Price	Finish
	Hardwire Operated				
	591T0228TR	<u></u>	1.5 gpm (5.7 L/min) (VRLAM)	307.90	Chrome
	591T0258TR	Ġ	0.5 gpm (1.9 L/min) (VRLAM)	307.90	Chrome
	591T0298TR	Ė	0.35 gpm (1.3 L/min) (VRS)	307.90	Chrome
	Battery Operated				
	591T1228TR	ક 💿	1.5 gpm (5.7 L/min) (VRLAM)	307.90	Chrome
	591T1258TR	Ł	0.5 gpm (1.9 L/min) (VRLAM)	307.90	Chrome
,	591T1298TR	Ł.	0.35 gpm (1.3 L/min) (VRS)	307.90	Chrome

- 3-hole 4" installation
- 5" long, 5.3" high
- Hands-free activation
- H₂Optics* Sensing Technology • Adjustable sensing range, auto shut-off,
- metering mode & periodic rinse feature
- 12" S/S cover, driver board, solenoid
- Requires separate order of rough-in for complete product
- . Connection from box to spout not supplied
- 2.5" max deck thickness
- Hardwire models, order transformer separately
- Battery operated, batteries included




Rough-in ONLY - For Use with Trim

(Must order trim number separately AND rough-in for complete product)

Model	Flow	Price	Finish
ELAVT0001ARI	N/A	481.45	N/A

- Rough-in ONLY, NO mixing valve • Recessed mount 10" x 10" box with single inlet
- Must order TRIM for complete model



Rough-in ONLY - For Use with Trim (Must order trim number separately AND rough-in for complete product)

Model	Flow	Price	Finish
ELAVT0008ARI	N/A	715.70	N/A

- Rough-in ONLY, with thermostatic mixing valve
- Recessed mount 10" x 10" box with thermostatic mixing valve
- Must order TRIM for complete model

2 = 4" (102 mm) cast spout

591TPA2250-LP

591TPA2290-LP

591TPA Surface Mount Box

TR ONLY used for recessed box

(not required for surface box)



Accessories for Field Conversion

Model	Flow	Price	Finish
061047A	N/A	61.75	N/A



でしてりて	MOLECUL CONTROL CONTRO	
6	•	

Model	Flow	Price	Finish
060651A	N/A	216.50	N/A

· Hardwire converter with battery backup

△ DELTA

· Order separately

• 3-position switch

• Refer to specification for applicable uses

Order separately

See page C145 for available transformers.



⚠ DELTA

Power Supply

0 = Hardwire operated

1 = Battery operated

2 = Plug-in power

MODEL NUMBER EXAMPLE:

Configurations vary, see below for availability.

(Available as comp	ilete models	S ONLY)		
Model		Flow	Price	Finish
Hardwire Operate	d			
591TPA0220	ઠ 💿	1.5 gpm (5.7 L/min) (VRLAM)	603.90	Chrome
591TPA0250	Ł	0.5 gpm (1.9 L/min) (VRLAM)	603.90	Chrome
591TPA0290	Ġ.	0.35 gpm (1.3 L/min) (VRS)	603.90	Chrome
Battery Operated				
591TPA1220	હિ	1.5 gpm (5.7 L/min) (VRLAM)	642.90	Chrome
591TPA1250	Ġ.	0.5 gpm (1.9 L/min) (VRLAM)	642.90	Chrome
591TPA1290	Ł	0.35 gpm (1.3 L/min) (VRS)	642.90	Chrome
Plug-in Power				
591TPA2220-PI	৳ 💿	1.5 gpm (5.7 L/min) (VRLAM)	642.90	Chrome
591TPA2250-PI	Ł	0.5 gpm (1.9 L/min) (VRLAM)	642.90	Chrome
591TPA2290-PI	F	0.35 gpm (1.3 L/min) (VRS)	642.90	Chrome
Less Power				
591TPA2220-LP	હ 💿	1.5 gpm (5.7 L/min) (VRLAM)	612.90	Chrome

0.5 gpm (1.9 L/min) (VRLAM)

0.35 gpm (1.3 L/min) (VRS)

2 = Vandal resistant laminar

Agion° antimicrobial finish outlet (VRLAM)

5 = Vandal resistant laminar outlet (VRLAM) **9** = Vandal resistant spray outlet (VRS)

612.90 Chrome

612.90 Chrome

591TPA0220-PI-TR —

0 = Surface mount box

(Available as complete model ONLY)

8 = Trim ONLY for recessed box (Must order rough-in number AND trim, AC filter and transformer separately for complete product)

• 3-hole, 4" installation • 5" long, 5.8" high

Cast body

 Proximity Sensing Technology Hands-free activation, entire spout is sensor

• Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature

Mixing valve required

• 2.5" max. deck thickness

• Hardwire, order AC filter and transformer separately

Battery operated, batteries included

• Plug-in, power supply included

• Less Power, for use with plug-in power model for multiple faucet installation (1-PI plus 2 - 4 LP), ganging/splitter wire supplied on



591TPA Trim ONLY for Recessed Box (Must order rough-in number separately AND trim for complete product)

Model		Flow	Price	Finish
Hardwire Operated				
591TPA0228TR	હિ 💿	1.5 gpm (5.7 L/min) (VRLAM)	303.05	Chrome
591TPA0258TR	Ł	0.5 gpm (1.9 L/min) (VRLAM)	303.05	Chrome
591TPA0298TR	E	0.35 gpm (1.3 L/min) (VRS)	303.05	Chrome

- 3-hole, 4" installation
- 5" long, 5.8" high Cast body
- Proximity Sensing Technology
- Hands-free activation, entire spout is sensor
- Adjustable sensing range, auto shut-off, metering mode & periodic rinse feature
- 12" S/S cover, driver board, solenoid • Requires separate order of rough-in for complete product
- Connection from box to spout not supplied
- 2.5" max. deck thickness
- Hardwire, order AC filter and transformer separately



Rough-in ONLY - For Use with Trim (Must order trim number separately AND rough-in for complete product)


Model	Flow	Price	Finish
ELAVT0001ARI	N/A	481.45	N/A

- Rough-in ONLY, NO mixing valve
- Recessed mount 10" x 10" box with single inlet
- Must order TRIM for complete model




Rough-in ONLY - For Use with Trim (Must order trim number separately AND rough-in for complete product)

Model	Flow	Price	Finish
ELAVT0008ARI	N/A	715.70	N/A



- Recessed mount 10" x 10" box with thermostatic mixing valve
- Must order TRIM for complete model




Accessories for Field Conversion

Model	Flow	Price	Finish
063268A	N/A	61.75	N/A

- Battery backup for surface mount box
- To convert installed hardwire or plug-in models
- One battery backup unit required for every spout/box
- Order separately





Accessories for Field Conversion

Model	Flow	Price	Finish
063269A	N/A	61.75	N/A

- Battery backup for recessed mount box
- To convert installed hardwire models
- One battery backup unit required for every spout/box
- Order separately



Accessories for Field Conversion

Model	Flow	Price	Finish
063267A	N/A	105.00	N/A

- AC filter (063271A) PLUS 20 VA transformer (060704A)
- · Required for hardwire models
- Powers up to 5 units



Accessories for Field Conversion

Model	Flow	Price	Finis
060651A	N/A	216.50	N/A

- 3-position switch
- Refer to specification for applicable uses
- Order separately

See Page C145 for available transformers.



⚠ DELTA

Power Supply

0 = Hardwire operated

1 = Battery operated

2 = Plug-in power

620TPA3320-PI-TR-SS **SS** = Brilliance[®] Stainless **BL** = Matte Black Blank = Chrome **Control Box PI** = Plug-in power supply TR ONLY used **LP** = Less power for recessed box 3 = Gooseneck spout 1 = Vandal resistant laminar outlet (VRLAM) **0** = Surface mount box (Must order PI (not required for 2 = Vandal resistant laminar outlet (VRLAM) (Available as complete 5 = Vandal resistant laminar outlet (VRLAM) model ONLY) model separately) surface box) **6** = Vandal resistant laminar outlet (VRLAM) 8 = Trim ONLY for recessed box (Must order rough-in number AND trim. AC filter

and transformer separately

for complete product)

612.90 Chrome



620TPA Surface Mount Box (Available as complete models ONLY)

622TPA3350-LP

Model		Flow	Price	Finish
Hardwire Operate	d			
620TPA3310	E	2.2 gpm (8.3 L/min) (VRLAM)	603.90	Chrome
620TPA3310-BL	E	2.2 gpm (8.3 L/min) (VRLAM)	670.10	Matte Black
620TPA3320	Ł 🤇	1.5 gpm (5.7 L/min) (VRLAM)	603.90	Chrome
620TPA3320-BL	Ł 🤇	1.5 gpm (5.7 L/min) (VRLAM)	670.10	Matte Black
620TPA3320-SS	Ł (1.5 gpm (5.7 L/min) (VRLAM)	670.10	Brilliance® Stainless
620TPA3350	E	0.5 gpm (1.9 L/min) (VRLAM)	603.90	Chrome
620TPA3350-BL	E	0.5 gpm (1.9 L/min) (VRLAM)	670.10	Matte Black
620TPA3350-SS	E	0.5 gpm (1.9 L/min) (VRLAM)	670.10	Brilliance® Stainless
620TPA3360-BL	ક્ષ	1.0 gpm (3.8 L/min) (VRLAM)	670.10	Matte Black
Battery Operated				
621TPA3310-BL	E	2.2 gpm (8.3 L/min) (VRLAM)	709.10	Matte Black
621TPA3320	£ @	1.5 gpm (5.7 L/min) (VRLAM)	642.90	Chrome
621TPA3320-BL	£ 3	1.5 gpm (5.7 L/min) (VRLAM)	709.10	Matte Black
621TPA3320-SS	Ł 🤇	1.5 gpm (5.7 L/min) (VRLAM)	709.10	Brilliance® Stainless
621TPA3350	E	0.5 gpm (1.9 L/min) (VRLAM)	642.90	Chrome
621TPA3350-BL	E	0.5 gpm (1.9 L/min) (VRLAM)	709.10	Matte Black
621TPA3350-SS	E	0.5 gpm (1.9 L/min) (VRLAM)	709.10	Brilliance® Stainless
621TPA3360	<u>t</u>	1.0 gpm (3.8 L/min) (VRLAM)	642.90	Chrome
621TPA3360-BL	હિ	1.0 gpm (3.8 L/min) (VRLAM)	709.10	Matte Black
Plug-in Power				
622TPA3320-PI	£ 3	1.5 gpm (5.7 L/min) (VRLAM)	642.90	Chrome
622TPA3350-PI	E	0.5 gpm (1.9 L/min) (VRLAM)	642.90	Chrome
Less Power				
622TPA3320-LP	£ @	1.5 gpm (5.7 L/min) (VRLAM)	612.90	Chrome

6.5 gpm (1.9 L/min) (VRLAM)

- 1-hole installation
- 4.8" long, 9.6" high
- Gooseneck spout
 - Proximity Sensing Technology
 - Hands-free activation, entire spout is sensor
 - Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature
 - Mixing valve required
 - 2.5" max. deck thickness
 - Order 061269A for 4" or 061270A for optional coverplate
- Hardwire, order AC filter and transformer separately
- Battery operated, batteries included
- Plug-in, power supply included
- Less Power, for use with plug-in power model for multiple faucet installation (1-Pl plus 2 - 4 LP), ganging/splitter wire supplied on LP models

Price Finish

216.50 N/A



620TPA Trim ONLY for Recessed Box (Must order rough-in number separately AND trim for complete product)

Model		Flow	Price	Finish
Hardwire Operated				
620TPA3318TR-SS	Ġ.	2.2 gpm (8.3 L/min) (VRLAM)	378.80	Brilliance* Stainless
620TPA3328TR	<u>k</u>	1.5 gpm (5.7 L/min) (VRLAM)	312.65	Chrome
620TPA3358TR	Ġ.	0.5 gpm (1.9 L/min) (VRLAM)	312.65	Chrome

- 1-hole installation • 4.8" long, 9.6" high
- Gooseneck spout
- Proximity Sensing Technology
- Hands-free activation, entire spout is sensor Adjustable sensing range, auto shut-off,
- metering mode and periodic rinse feature
 12" S/S cover, driver board, solenoid
- Requires separate order of rough-in for
- complete product
- Connection from box to spout not supplied
- 2.5" max. deck thickness Order 061269A for 4" or 061270A for optional
- Hardwire, order AC filter and transformer separately



Rough-in ONLY - For Use with Trim (Must order trim number separately AND rough-in for complete product)

Model	Flow	Price	Finish
ELAVT0001ARI	N/A	481.45	N/A

- Rough-in ONLY, NO mixing valve
- Recessed mount 10" x 10" box with single inlet
- Must order TRIM for complete model



Rough-in ONLY - For Use with Trim (Must order trim number separately AND rough-in for complete product)

Model	Flow	Price	Finish
ELAVT0008ARI	N/A	715.70	N/A


- Rough-in ONLY, with thermostatic mixing valve
- Recessed mount 10" x 10" box with thermostatic mixing valve
- Must order TRIM for complete model



Accessories for Field Conversion

Model	Flow	Price	Finish
063268A	N/A	61.75	N/A

- Battery backup for surface mount box • To convert installed hardwire or plug-in models
- One battery backup unit required for every spout/box
- Order separately



Accessories for Field Conversion

Model	Flow	Price	Finish
063269A	N/A	61.75	N/A

- Battery backup for recessed mount box
- To convert installed hardwire models
- One battery backup unit required for every spout/box
- Order separately



Accessories for Field Conversion

Model	Flow	Price	Finish
063267A	N/A	105.00	N/A

- AC filter (063271A) PLUS 20 VA transformer (060704A)
- Required for hardwire models
- Powers up to 5 units





Coverplate for Field Conversion

Model	Flow
060651A	N/A

• 3-position switch

• Refer to specification for applicable uses

Order separately



Model	Flow	Price	Finish
061269A	N/A	74.50	Chrome
061269BL	N/A	89.45	Matte Black
061269SS	N/A	89.45	Brilliance* Stainless

• 4" (102 mm) coverplate

See Page C145 for available transformers.

630TPA320-PI-TR-SS

SS = Brilliance® Stainless ${\bf Blank}={\bf Chrome}$

Power Supply 0 = Hardwire operated

3 = Ara° Spout

1 = Battery operated 2 = Plug-in power

2 = Vandal resistant laminar outlet (VRLAM) 5 = Vandal resistant laminar outlet (VRLAM)

(Available as complete **9** = Vandal resistant spray outlet (VRS)

model ONLY) 8 = Trim ONLY for recessed box (Must order rough-in number AND trim, AC filter and transformer separately for complete product)

613.80 Chrome

Control Box PI = Plug-in power supply **0** = Surface mount box LP = Less power

(Must order PI model separately)

TR ONLY used for recessed box (not required for surface box)



630TPA Surface Mount Box (Available as complete models ONLY)

632TPA390-LP

(Available as complete models oner)					
Model			Flow	Price	Finish
Hardwire Operated					
630TPA320	ક (3	1.5 gpm (5.7 L/min) (VRLAM)	604.80	Chrome
630TPA320-SS	ક ઉ	S	1.5 gpm (5.7 L/min) (VRLAM)	670.95	Brilliance® Stainless
630TPA350	Ł		0.5 gpm (1.9 L/min) (VRLAM)	604.80	Chrome
630TPA350-SS	Ł		0.5 gpm (1.9 L/min) (VRLAM)	670.95	Brilliance® Stainless
630TPA390	Ł		0.35 gpm (1.3 L/min) (VRS)	604.80	Chrome
630TPA390-SS	Ł		0.35 gpm (1.3 L/min) (VRS)	670.95	Brilliance® Stainless
Battery Operated					
631TPA320	ક (3	1.5 gpm (5.7 L/min) (VRLAM)	643.80	Chrome
631TPA320-SS	ક (3	1.5 gpm (5.7 L/min) (VRLAM)	709.95	Brilliance® Stainless
631TPA350	Ł		0.5 gpm (1.9 L/min) (VRLAM)	643.80	Chrome
631TPA350-SS	Ł		0.5 gpm (1.9 L/min) (VRLAM)	709.95	Brilliance® Stainless
631TPA390	Ł		0.35 gpm (1.3 L/min) (VRS)	643.80	Chrome
631TPA390-SS	Ġ.		0.35 gpm (1.3 L/min) (VRS)	709.95	Brilliance® Stainless
Plug-in Power					
632TPA320-PI	ક ઉ	S	1.5 gpm (5.7 L/min) (VRLAM)	643.80	Chrome
632TPA350-PI	Ł		0.5 gpm (1.9 L/min) (VRLAM)	643.80	Chrome
632TPA390-PI	F		0.35 gpm (1.3 L/min) (VRS)	643.80	Chrome
Less Power					
632TPA320-LP	ક (3	1.5 gpm (5.7 L/min) (VRLAM)	613.80	Chrome
632TPA350-LP	Ł		0.5 gpm (1.9 L/min) (VRLAM)	613.80	Chrome

0.35 gpm (1.3 L/min) (VRS)

- 1-hole installation
- 5.35" long, 5.2" high
- Cast brass spout
- Proximity Sensing Technology
- · Hands-free activation, entire spout is sensor · Adjustable sensing range, auto shut-off,
- metering mode and periodic rinse feature
- Mixing valve required
- 2.5" max. deck thickness
- Order 061305A for 4" optional coverplate
- Hardwire, order AC filter and transformer separately
- Battery operated, batteries included
- Plug-in, power supply included
- Less Power, for use with plug-in power model for multiple faucet installation (1-PI plus 2 - 4 LP), ganging/splitter wire supplied on LP models



⚠ DELTA

630TPA Trim ONLY for Recessed Box (Must order rough-in number separately AND trim for complete product)

Model		FIOW	Price	FINISN
Hardwire Operated				
630TPA328TR	<u>k</u>	1.5 gpm (5.7 L/min) (VRLAM)	312.65	Chrome
630TPA358TR	E	0.5 gpm (1.9 L/min) (VRLAM)	312.65	Chrome
630TPA398TR	Ġ	0.35 gpm (1.3 L/min) (VRS)	312.65	Chrome
630TPA398TR-SS	E	0.35 gpm (1.3 L/min) (VRS)	378.80	Brilliance® Stainless

- 1-hole installation
- 5.35" long, 5.2" high
- Cast brass spout
- Proximity Sensing Technology
- · Hands-free activation, entire spout is sensor • Adjustable sensing range, auto shut-off,
- metering mode and periodic rinse feature
- 12" S/S cover, driver board, solenoid • Requires separate order of rough-in for
- complete product
- Connection from box to spout not supplied
- 2.5" max. deck thickness
- Order 061305A for 4" optional coverplate
- Hardwire, order AC filter and transformer separately



Rough-in ONLY - For Use with Trim (Must order trim number separately AND rough-in for complete product)

Model	Flow	Price	Finish
ELAVT0001ARI	N/A	481.45	N/A

- Rough-in ONLY, NO mixing valve
- Recessed mount 10" x 10" box with single inlet
- Must order TRIM for complete model



Rough-in ONLY - For Use with Trim (Must order trim number separately AND rough-in for complete product)

Model Price Finish ELAVT0008ARI N/A 715.70 N/A


- Rough-in ONLY, with thermostatic mixing valve
- Recessed mount 10" x 10" box with thermostatic mixing valve
- Must order TRIM for complete model



Accessories for Field Conversion

Model	Flow	Price	Finish
063268A	N/A	61.75	N/A

- Battery backup for surface mount box • To convert installed hardwire or plug-in models
- One battery backup unit required for every spout/box
- Order separately



Accessories for Field Conversion

Model	Flow	Price	Finish
063269A	N/A	61.75	N/A

- Battery backup for recessed mount box
- To convert installed hardwire models
- One battery backup unit required for every spout/box
- Order separately



Accessories for Field Conversion

Model	Flow	Price	Finish
063267A	N/A	105.00	N/A

- AC filter (063271A) PLUS 20 VA transformer (060704A)
- Required for hardwire models
- Powers up to 5 units

Accessories for Field Conversion

Coverplate for Field Conversion

Model	Flow	Price	Finis
060651A	N/A	216.50	N/A



• Refer to specification for applicable uses

Order separately

• 4" (102 mm) coverplate

Model	Flow	Price	Finish
061305A	N/A	88.90	Chrome
061305SS	N/A	97.20	Brilliance® Stainless

See Page C145 for available transformers.



MODEL NUMBER EXAMPLE:

Configurations vary, see below for availability.

1500T3378TR-R35-

R* = Optional gooseneck spout dimensions: R35 = 6" long, 11" high

TR ONLY used for recessed box

(not required for surface box)

Power Supply

0 = Hardwire operated 1 = Battery operated

3 = Single hole gooseneck

1501T3370

1501T3380

1501T3320

1501T3370-R35

1501T3380-R35

Ł

Battery Operated - Threaded Outlet

- 1 =Smooth end, laminar outlet (SELAM)
- 2 = Vandal resistant laminar outlet (VRLAM)
- 7 = Smooth end, laminar outlet (SELAM) 8 = Smooth end, laminar outlet (SELAM)
- **Control Box 0** = Surface mount box

710.15 Chrome

716.20 Chrome

710.15 Chrome

716.20 Chrome

710.15 Chrome

- (Available as complete model ONLY)
- $\mathbf{8} = \text{Trim ONLY for recessed box}$ (Must order rough-in number separately AND trim for complete product)



Surface Mount Box (Available as complete models ONLY)

Model		Flow	Price	Finish		
Hardwire Operated – Smooth End Gooseneck						
1500T3310	Ł	2.2 gpm (8.3 L/min) (SELAM)	710.15	Chrome		
1500T3310-R35	Ġ.	2.2 gpm (8.3 L/min) (SELAM)	716.20	Chrome		
1500T3370	ક્ષ 💿	1.5 gpm (5.7 L/min) (SELAM)	710.15	Chrome		
1500T3370-R35	<u>k</u> 💿	1.5 gpm (5.7 L/min) (SELAM)	716.20	Chrome		
1500T3380	Ł	0.5 gpm (1.9 L/min) (SELAM)	710.15	Chrome		
1500T3380-R35	Ł	0.5 gpm (1.9 L/min) (SELAM)	716.20	Chrome		
Hardwire Operated	– Thread	ed Outlet				
1500T3320	& 💿	1.5 gpm (5.7 L/min) (VRLAM)	710.15	Chrome		
Battery Operated –	Battery Operated – Smooth End Gooseneck					
1501T3310	E	2.2 gpm (8.3 L/min) (SELAM)	710.15	Chrome		

⑤ 1.5 gpm (5.7 L/min) (SELAM)

0.5 gpm (1.9 L/min) (SELAM)

0.5 gpm (1.9 L/min) (SELAM)

- 1-hole installation • 6" long, 14.75" high
- Hands-free activation
- H₂Optics[®] Sensing Technology
- Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature
- Mixing valve required
- 2.5" max deck thickness
- Order 060546A for 4" or 060547A for 8" optional coverplates
- Hardwire models, order transformer separately
- Battery operated, batteries included
- R* = Optional gooseneck spout dimensions:
- R35 = 6" long, 11" high



Trim ONLY for Recessed Box (Must order rough-in number separately AND trim for complete product)

Model		Flow	Price	Finish				
Hardwire Operated	Hardwire Operated – Smooth End Gooseneck							
1500T3318TR	E	2.2 gpm (8.3 L/min) (SELAM)	357.85	Chrome				
1500T3378TR	<u>ل</u> 🚳	1.5 gpm (5.7 L/min) (SELAM)	357.85	Chrome				
1500T3378TR-R35	<u>ل</u> 🚳	1.5 gpm (5.7 L/min) (SELAM)	363.95	Chrome				
1500T3388TR	Ġ.	0.5 gpm (1.9 L/min) (SELAM)	357.85	Chrome				
1500T3388TR-R35	E	0.5 gpm (1.9 L/min) (SELAM)	363.95	Chrome				
Hardwire Operated	– Thread	ed Outlet						
1500T3328TR	<u>k</u>	1.5 gpm (5.7 L/min) (VRLAM)	357.85	Chrome				
Battery Operated -	- Smooth E	ind Gooseneck						
1501T3378TR	<u>b</u>	1.5 gpm (5.7 L/min) (SELAM)	357.85	Chrome				
1501T3378TR-R35	৬ 🚳	1.5 gpm (5.7 L/min) (SELAM)	363.95	Chrome				
1501T3388TR	Ġ.	0.5 gpm 1.9 L/min) (SELAM)	357.85	Chrome				
Battery Operated – Threaded Outlet								
1501T3328TR	<u>ь</u> 🚳	1.5 gpm (5.7 L/min) (VRLAM)	357.85	Chrome				

- 1-hole installation
- 6" long, 14.75" high
- Hands-free activation
- H₂Optics* Sensing Technology
- · Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature
- 12" S/S cover, driver board, solenoid • Requires separate order of rough-in for
- complete product
- Connection from box to spout not supplied
- 2.5" max deck thickness
- Order 060546A for 4" or 060547A for 8" optional coverplates
- Hardwire models, order transformer separately
- Battery operated, batteries included
- R* = Optional gooseneck spout dimensions: R35 = 6" long, 11" high



Rough-in ONLY - For Use with Trim (Must order trim number separately AND rough-in for complete product)

Model	Flow	Price	Finish
ELAVT0001ARI	N/A	481.45	N/A

- Rough-in ONLY, NO mixing valve
- Recessed mount 10" x 10" box with single inlet
- Must order TRIM for complete model



Rough-in ONLY - For Use with Trim (Must order trim number separately AND rough-in for complete product)

Model	Flow	Price	Finish
ELAVT0008ARI	N/A	715.70	N/A

- Rough-in ONLY, with thermostatic mixing valve
- Recessed mount 10" x 10" box with thermostatic mixing valve
- Must order TRIM for complete model



Accessories for Field Conversion

odel	Flow	Price	Finisl
S1047A	N/A	61.75	N/A

- Hardwire converter with battery backup
- Order separately



Accessories for Field Conversion

Coverplate for Field Conversion

Model	Flow	Price	Finish
060651A	N/A	216.50	N/A

N/A

N/A

• 3-position switch

• Refer to specification for applicable uses

Order separately



• 4" (102 mm) coverplate

•8" (204 mm) coverplate



060547A

Coverplate for Field Conversion

Price Finish

74.00 Chrome

Price Finish

95.10 Chrome

See page C145 for available transformers.



Electronic Wallmount Faucet with Surface Mount Box (Available as complete models ONLY)

Model		Flow	Price	Finish		
Hardwire Operated – Smooth End Gooseneck						
1500T4610	Ł	2.2 gpm (8.3 L/min) (SELAM)	769.35	Chrome		
1500T4670	<u>t</u>	1.5 gpm (5.7 L/min) (SELAM)	769.35	Chrome		
1500T4670-R35	ხ 🚳	1.5 gpm (5.7 L/min) (SELAM)	775.45	Chrome		
Hardwire Operated 1500T4620	– Threade	ed Outlet 1.5 gpm (5.7 L/min) (VRLAM)	769.35	Chrome		
Battery Operated –	Smooth E	nd Gooseneck				
1501T4670	<u>გ</u>	1.5 gpm (5.7 L/min) (SELAM)	769.35	Chrome		
1501T4670-R35	৳ 💿	1.5 gpm (5.7 L/min) (SELAM)	775.45	Chrome		
Battery Operated –	_					
1501T4620	<u></u> 등	1.5 gpm (5.7 L/min) (VRLAM)	769.35	Chrome		

- Wallmount installation
 - 6" long, 15.75" high
 - Hands-free activation
 - H₂Optics[®] Sensing Technology • Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature
 - Mixing valve required
 - Hardwire models, order transformer separately
- Battery operated, batteries included



Electronic Wallmount Faucet with Recessed Box (Available as complete models ONLY)

1500T4628

Model	Flow	Price	Finish
WITH Thermostat	c Mixing Valve		
Hardwire Oper	ated – Smooth End Gooseneck		
1500T4618	٤.2 gpm (8.3 L/min) (S	SELAM) 1,114.60	Chrome
1500T4678	& ③ 1.5 gpm (5.7 L/min) (S	SELAM) 1,114.60	Chrome
Hardwire Oper	ated – Threaded Outlet		

5 1.5 gpm (5.7 L/min) (VRLAM) 1,114.60 Chrome

- Wallmount installation
- Hands-free activation
- Connection from box to spout not supplied
- Hardwire models, order transformer separately
- 6" long, 15.75" high
- H₂Optics[®] Sensing Technology
- Adjustable sensing range, auto shut-off, metering mode and periodic rinse feature
- 12" S/S cover, driver board, solenoid

- Battery operated, batteries included



△ DELTA

Accessories	for	Field	Conve	rsion
100003301103	101	I IUIU	OUIIVO	1 31011

Model	Flow	Price	Finish
061047A	N/A	61.75	N/A

· Hardwire converter with battery backup

• Order separately

Accessories for Field Conversion

	20,000 onto
6.3	

Model Flow Price Finish 060651A N/A 216.50 N/A

• 3-position switch

• Refer to specification for applicable uses

Order separately

See page C145 for available transformers.

Configurations vary, see below for availability.

860T168

Power Supply

0 = Hardwire operated 1 = Battery operated

Shower

- 0 = No shower head
- $\mathbf{5} = \text{Hand shower w/24" SS grab bar and ADA slide}$
- $6 = 30^{\circ} \text{ VR wallmount shower head}$
- 7 = 30° VR forged wallmount shower head

Control Box

- 3 = 8" Recessed box, no mixing valve
- **6** = Components only UNASSEMBLED, 4" box, no mixing valve
- **7** = 10" Recessed box, pressure balance
- mixing valve 8 = 10" Recessed box, thermostatic mixing valve



800.85 Chrome

800.85 Chrome

1,085.15 Chrome



Hardwire Operated

861T103

 Recessed metal box No mixing valve

• Electronic shower with push button activator

NO shower head

• Field adjustable shower time

Hardwire models, order transformer separately

Battery operated, batteries included



860T Electronic Shower with Hand Shower and 8" Recessed Box No Mixing Valve

			_	
Model		Flow	F	rio

N/A


Hardwire Operated

⑤ 1.5 gpm (5.7 L/min) 860T153



- No mixing valve
- Electronic shower with push button activator
- 24" long, 1 1/2" stainless slide/grab bar
- ADA adjustable mount
- Hand shower and 70" vinyl hose
- · ADA-compliant grab bar (when installed per accessibility guidelines of the act)
- Touch-Clean* 2-setting hand shower is WaterSense® laheled
- Pause, Full Body Spray
- Field adjustable shower time
- Hardwire models, order transformer separately
- Battery operated, batteries included

860T Electronic Shower with 4" Recessed Box — Components Only UNASSEMBLED - No Mixing Valve



- · Recessed metal box
- Components unassembled No mixing valve
- Electronic shower with push button activator NO shower head
- Field adjustable shower time
- Hardwire models, order transformer separately
- · Battery operated, batteries included



860T Push Button Electronic Shower with Hand Shower and 4" Recessed Box - Components Only UNASSEMBLED - No Mixing Valve

Model	Flow	Price	Finish
Hardwire Operated 860T156	₺ 1 .5 gpm (5.7 L/min)	779.00	Chrome

- · Recessed metal box
- · Components unassembled
- No mixing valve
- Electronic shower with push button activator
- 24" long, 1 1/2" stainless slide/grab bar
- ADA adjustable mount
- Hand shower and 70" vinyl hose
- · ADA-compliant grab bar (when installed per accessibility guidelines of the act)
- Touch-Clean® 2-setting hand shower is
- WaterSense® laheled
- Pause, Full Body Spray
- · Field adjustable shower time
- Hardwire models, order transformer separately
- · Battery operated, batteries included

#7 control box with pressure balance valve rated at minimum 1.2 gpm (4.5 L/min) @ 45 psi (310 kPa). #8 control box with thermostatic valve rated at minimum 0.35 gpm (1.3 L/min) @ 45 psi (310 kPa). Stated flow rate for shower heads at 80 psi maximum water usage.

> ONLINE CATALOGS: www.deltacommercialfaucets.com (Core products ONLY) www.specselect.com (Complete Product Offering & Part Numbering System)

DELTA COMMERCIAL TECHNICAL SERVICE 1-877-509-2680



⚠ DELTA

860T Electronic Shower with 10" Recessed Box – Pressure Balance Mixing Valve					
Model		Flow	Price	Finish	
Hardwire Operated					
860T107	F	N/A	1,214.20	Chrome	
Battery Operated					
861T107	E	N/A	1.214.20	Chrome	

- Recessed metal box
- Pressure balance mixing valve
- Electronic shower with push button activator
- NO shower head • Vandal resistant handle adjusts temperature
- Red/blue indicator
- Field adjustable shower time
- Hardwire models, order transformer separately
- Battery operated, batteries included




860T Electronic Shower with Hand Shower and 10" Recessed Box Pressure Balance Mixing Valve

Hardwire Operated ₹ 1.5 gpm (5.7 L/min) 860T157 1,498.50 Chrome

- Recessed metal box
- Pressure balance mixing valve
- Electronic shower with push button activator
- 24" long, 1 1/2" stainless slide/grab bar
- ADA adjustable mount
- Hand shower and 70" vinyl hose
- · ADA-compliant grab bar (when installed per accessibility guidelines of the act)
- Touch-Clean® 2-setting hand shower is WaterSense® labeled
- Pause, Full Body Spray
- Vandal resistant handle adjusts temperature
- Red/blue indicator
- Field adjustable shower time
- · Hardwire models, order transformer separately
- Battery operated, batteries included



860T Electronic Shower with 30° Wallmount Shower Head and 10" Recessed Box - Pressure Balance Mixing Valve



Recessed metal box

head

- Pressure balance mixing valve
- Electronic shower with push button activator • 30° vandal resistant cast wallmount shower
- · Vandal resistant handle adjusts temperature
- Red/blue indicator
- Field adjustable shower time • Hardwire models, order transformer separately
- · Battery operated, batteries included



860T Electronic Shower with 30° Wallmount Shower Head and 10" Recessed Box - Pressure Balance Mixing Valve

	ee iiiiiiiig turre		
Model	Flow	Price	Finish
Hardwire Operated 860T177		1,431.30	Chrome
Battery Operated			
861T177		1,431.30	Chrome

- Recessed metal box
- Pressure balance mixing valve
- Electronic shower with push button activator • 30° vandal resistant forged wallmount
- shower head is WaterSense® labeled
- · Vandal resistant handle adjusts temperature • Red/blue indicator
- Field adjustable shower time
- Hardwire models, order transformer separately
- Battery operated, batteries included

#7 control box with pressure balance valve rated at minimum 1.2 gpm (4.5 L/min) @ 45 psi (310 kPa). #8 control box with thermostatic valve rated at minimum 0.35 gpm (1.3 L/min) @ 45 psi (310 kPa). Stated flow rate for shower heads at 80 psi maximum water usage.

C145



860T Electronic Shower with 10" Recessed Box - Thermostatic Mixing Valve

Model		Flow	Price	Finish	
Hardwire Operated 860T108	Ł	N/A	1,214.20	Chrome	
Battery Operated 861T108	Ł	N/A	1,214.20	Chrome	

- Recessed metal box
 - Thermostatic mixing valve
 - Electronic shower with push button activator
 - NO shower head
 - Tempered water supplied to solenoid valve
 - Field adjustable shower time
 - Hardwire models, order transformer separately
 - Battery operated, batteries included



860T Electronic Shower with Hand Shower and 10" Recessed Box - Thermostatic Mixing Valve

Model	Flow	Price	Finish	
Hardwire Operated				
860T158		1.498.50	Chrome	

- · Recessed metal box
- Thermostatic mixing valve
- Electronic shower with push button activator
- 24" long, 1 1/2" stainless slide/grab bar
- ADA adjustable mount
- Hand shower and 70" vinyl hose
- ADA-compliant grab bar (when installed per
- accessibility guidelines of the act) • Touch-Clean® 2-setting hand shower is
- WaterSense® labeled
- Pause, Full Body Spray
- Tempered water supplied to solenoid valve
- Field adjustable shower time
- Hardwire models, order transformer separately
- Battery operated, batteries included



860T Electronic Shower with 30° Wallmount Shower Head and 10" Recessed Box - Thermostatic Mixing Valve

Model		Flow	Price	Finish
Hardwire Operated 860T168	Ł	1.5 gpm (5.7 L/min)	1,431.30	Chrome

- Recessed metal box • Thermostatic mixing valve
- Electronic shower with push button activator
- 30° vandal resistant cast wallmount
- shower head • Tempered water supplied to solenoid valve
- Field adjustable shower time
- Hardwire models, order transformer separately
- Battery operated, batteries included



860T Electronic Shower with 30° Wallmount Shower Head and 10" Recessed Box - Thermostatic Mixing Valve



Model	Flow	Price	Finish	
Hardwire Operated				
860T178		1,431.30	Chrome	

- Recessed metal box
- Thermostatic mixing valve
- Electronic shower with push button activator
- 30° vandal resistant forged wallmount shower head is WaterSense® labeled
- Tempered water supplied to solenoid valve
- Field adjustable shower time
- Hardwire models, order transformer separately Battery operated, batteries included



Accessories for Field Conversion

Model	Flow	Price	Finish
061047A	N/A	61.75	N/A

- · Hardwire converter with battery backup
- Order separately

See page C145 for available transformers.

C144

#7 control box with pressure balance valve rated at minimum 1.2 gpm (4.5 L/min) @ 45 psi (310 kPa). #8 control box with thermostatic valve rated at minimum 0.35 gpm (1.3 L/min) @ 45 psi (310 kPa). Stated flow rate for shower heads at 80 psi maximum water usage.

> DELTA COMMERCIAL TECHNICAL SERVICE 1-877-509-2680 ONLINE CATALOGS: www.deltacommercialfaucets.com (Core products ONLY) www.specselect.com (Complete Product Offering & Part Numbering System)



20 VA Transformer



odel	Flow	Price	Finish
60704A	N/A	66.00	N/A

· Supplies power for: Up to 10 - 590-HDF electronic faucets converted to hardwire, OR Up to 10 - 860T push-button electronic showers, OR Up to 5 - 3000T, 1500T, 590T, 590TP, 591T, 591TP, DEMD, 600T, 620TP or 630TP series electronic faucets, OR Up to 5 - 1600T, 81THWA or 81TWMS series electronic flush valves

40 VA Transformer



Model	Flow	Price	Finish	
060771A	N/A	67.15	N/A	

• Supplies power for: Up to 10 - 3000T, 1500T, 590T, 590TP, 591T, 591TP, DEMD, 600T, 620TP or 630TP series electronic faucets, OR Up to 10 - 1600T, 81THWA or 81TWMS series electronic flush valves

Plug-In Transformer

Model	Flow	Price	Finish
RP32856	N/A	52.65	N/A

• Supplies power for: Up to 10 - 590-HDF electronic faucets converted to hardwire, OR Up to 10 - 860T push-button electronic showers, OR Up to 5 - 3000T, 1500T, 590T, 590TP, 591T, 591TP, DEMD, 600T, 620TP or 630TP series electronic faucets. OR Up to 5 - 1600T, 81THWA or 81TWMS series electronic flush valves



W62 Ball Valve Hose Cock

lodel		Flow	Price	Finish
/6200AIR	<u>\$</u>	N/A	54.05	Chrome
V6200CW*	Ġ.	N/A	54.05	Chrome
/6200GAS	Ġ.	N/A	54.05	Chrome
V6200VAC	Ġ.	N/A	54.05	Chrome

Ball valve hose cock

- 3/8" MIP inlet
- No shank
- Non-removable lever handle
- CW not for potable water*



W62 Ball Valve Hose Cocks - Deckmount Turret

Model		Flow	Price	Finish
Single Ball Valve				
W6210AIR	Ł	N/A	120.50	Chrome
W6210CW*	Ġ	N/A	120.50	Chrome
W6210GAS	Ġ	N/A	120.50	Chrome
W6210VAC	Ł	N/A	120.50	Chrome
Two Ball Valves @ 9	0 degree	es		
W6220AIR	Ł	N/A	182.70	Chrome
W6220GAS	Ė	N/A	182.70	Chrome
W6220VAC	Ġ	N/A	182.70	Chrome
Two Ball Valves @ 1	80 degre	es		
W6225AIR	Ł.	N/A	182.70	Chrome
W6225CW*	Ł	N/A	182.70	Chrome
W6225GAS	Ł	N/A	182.70	Chrome
W6225VAC	Ł	N/A	182.70	Chrome

- Ball valve hose cock
- 1/4" IP tail
- 4.44" shank
- Non-removable lever handle
- CW not for potable water*




Laboratory

W62 Ball Valve Hose Cock - Wallmount with Flange

Model Flow	Price	Finish
W6270AIR & N/A	101.40	Chrome
W6270CW* & N/A	101.40	Chrome
W6270GAS & N/A	101.40	Chrome
W6270VAC & N/A	101.40	Chrome

- Ball valve hose cock 1/4" IP tail
- 2.38" shank





♦ DELTA

W66 Pure Water Faucet - Valve Only

Model	Flow	Price	Finish
W6629DI	N/A	266.45	Chrome
W6629DW	N/A	266.45	Chrome

- Celcon[®] control valve ONLY
- Self-closing, spring loaded, full lock open handle
- Not for potable water



W66 Pure Water Faucet - Deckmount


Model	Flow	Price	Finish
W6635DI	N/A	429.55	Chrome
W6635DW	N/A	429.55	Chrome

- Deckmount pure water faucet
 Self-closing, spring loaded, full lock open handle
- 6" long, 15" high
- Not for potable water

n	:	W:4	

Model	Flow	Price	Finish
068128A	N/A	85.15	N/A

- Repair kit ONLY





W66 Single Water Faucets For Up to 1-1/4" Diameter Hole

Model		Flow	Price	Finish
Serrated Nozzle				
W6600		N/A	160.30	Chrome
W6600-C	Ġ.	N/A	160.30	Chrome
In-line Vacuum B	eaker and	Serrated Nozzle		
WCCOO O		NI/A	005.50	01

- 1-hole installation
- 7/8" hole dia. recommended
- Deckmount gooseneck
- Serrated nozzle
- 6" long, 15" high
- Two-arm metal handle
- Color index • Teck° lab structure
- Not for potable water

/6600-9		N/A	225.50	Chrome
/6600-9-C	Ġ.	N/A	225.50	Chrome



W66 Single Water Faucets For Up to 1-1/4" Diameter Hole

Model		Flow	Price	Finish
Angle Vacuum Break	ker and S	errated Nozzle		
W6600-10		N/A	252.85	Chrome
W6600-10-C	Ł	N/A	252.85	Chrome

- 1-hole installation
- 7/8" hole dia. recommended
- Deckmount angle VB gooseneck
- Serrated nozzle
- 6" long, 15" high
- Two-arm metal handle
- Color index
- Teck[®] lab structure Not for potable water



W66 Single Wat	er Faucets	For Up to	1-1/2"	Diameter	Но

Model		Flow	Price	Finish
Serrated Nozzle				
W6601		N/A	157.45	Chrome
W6601-C	Ł	N/A	157.45	Chrome
In-line Vacuum Br	eaker and	I Serrated Nozzle		
W6601-9		N/A	231.45	Chrome
W6601-9-C	Ł	N/A	231.45	Chrome

- 1-hole installation
- 1" hole dia. recommended
- Deckmount gooseneck Serrated nozzle
- 6" long, 16" high • Two-arm metal handle
- Color index
- Teck® lab structure
- Not for potable water




C148

W66 Single Water Faucets For Up to 1-1/2" Diameter Hole

Model		Flow		Price	Finish
Angle Vacuum B	reaker and	Serrated Nozzle			
W6601-10		N/A	2	31.45	Chrome
W6601-10-C	Ġ.	N/A	2	31.45	Chrome

- 1-hole installation
- 1" hole dia. recommended • Deckmount angle VB gooseneck
- Serrated nozzle
- 6" long, 16" high
- Two-arm metal handle
- Color index Teck[®] lab structure
- Not for potable water





⚠ DELTA

W67 Mixing Water Faucets - 2.75" Centers

Serrated Nozzl	е				
W6700		N/A	250.50	Chrome	
W6700-C	Ł	N/A	250.50	Chrome	
In-line Vacuum	n Breaker and	l Serrated Nozzle			
W6700-9		N/A	310.60	Chrome	
W6700-9-C	Ł	N/A	310.60	Chrome	

Price Finish

194.60 Chrome

257.35 Chrome



- 7/8" hole dia. recommended
 - Deckmount gooseneck Serrated nozzle
- 6" long, 15" high
- Two-arm metal handle
- Color index
- Teck® lab structure
- Not for potable water



W67 Mixing Water Faucets - 2.75" Centers

Model		Flow	Price	Finish	
Angle Vacuum B	reaker and	Serrated Nozzle			
W6700-10		N/A	335.90	Chrome	
W6700-10-C	Ł	N/A	335.90	Chrome	

- 2-hole installation
- 7/8" hole dia. recommended
- Deckmount angle VB gooseneck
- Serrated nozzle
- 6" long, 15" high
- Two-arm metal handle
- Color index
- Teck° lab structure
- Not for potable water
- W67 Mixing Water Faucets 4" Centers Model Flow Price Finish



194.60 Chrome In-line Vacuum Breaker and Serrated Nozzle W6720-9 257.35 Chrome

N/A

• 2-hole 4" installation • 1.75" max deck thickness Deckmount gooseneck

Serrated nozzle

- •6" long, 14.85" high
- Two-arm metal handle
- Color index
- Teck® lab structure
- Not for potable water

W67 Mixing Water Faucets - 4" Centers

Ė

W6720-9-C

Model		Flow		Price	Finish
	raakar and C			11100	ımı
Angle Vacuum B W6720-10	reaker and S	N/A	:	257.35	Chrome
W6720-10-C	Ł	N/A		257.35	Chrome

- 2-hole 4" installation • 1.75" max deck thickness
- Deckmount angle VB gooseneck
- Serrated nozzle
- •6" long, 13.25" high
- · 2-arm metal handle
- Color index • Teck® lab structure
- Not for potable water



W67 Mixing Water Faucets – 8" Centers

Model		Flow	Price	Finish
Serrated Nozzle				
W6740		N/A	269.85	Chrome
W6740-C	Ł	N/A	269.85	Chrome
In-line Vacuum Bre	aker and	Serrated Nozzle		
W6740-9		N/A	330.45	Chrome
W6740-9-C	E	N/A	330.45	Chrome

- 2-hole 8" installation
- 1.75" max deck thickness
- Deckmount gooseneck Serrated nozzle
- 6" long, 14.85" high
- Two-arm metal handle
- Color index • Teck° lab structure
- Not for potable water



W67 Mixing Water Faucets - 8" Centers

Model	Flow	Price	Finish
Angle Vacuum Bre	aker and Serrated N	ozzle	
W6740-10	N/A	330.45	Chrome
W6740-10-C	& N/A	330.45	Chrome

- 2-hole 8" installation
- 1.75" max deck thickness • Deckmount angle VB gooseneck
- Serrated nozzle
- 6" long, 13.25" high
- Two-arm metal handle
- Color index
- Teck° lab structure Not for potable water



W67 Mixing Water Faucets - Single Shank

Model	Flow	Price	Finish
Serrated Nozzle			
W6760	N/A	288.40	Chrome
In-line Vacuum Breaker and	Serrated Nozzle		
W6760_9	N/Δ	3/15/85	Chromo

- Single hole installation • 1.25" hole dia. recommended
- Deckmount gooseneck
- Serrated nozzle
- 6" long, 15.5" high Two-arm metal handle

- Color index
- Teck° lab structure Not for potable water



W67 Mixing Water Faucets – Single Shank

Model	Flow	Price	Finish	
Angle Vacuum Brea	aker and Serrated Nozzle			
W6760-10	N/A	369.75	Chrome	

- Single hole installation
- 1.25" hole dia. recommended
- Deckmount angle VB gooseneck
- Serrated nozzle 6" long, 15.5" high
- 2-arm metal handle Color index
- Teck° lab structure
- Not for potable water

DELTA COMMERCIAL TECHNICAL SERVICE 1-877-509-2680

www.specselect.com (Complete Product Offering & Part Numbering System)

ONLINE CATALOGS: www.deltacommercialfaucets.com (Core products ONLY)


Inserts for Outlets

MODEL	DESCRIPTION		PRICE
060686A	1.9 L/min. (0.5 gpm) Insert (pkg. of 12)	Spray	47.45
060687A	3.8 L/min. (1.0 gpm) Insert (pkg. of 12)	Spray	58.45
060688A	5.7 L/min. (1.5 gpm) Antimicrobial Laminar Flow Insert (pkg. of 12)	Laminar	117.70
060689A	5.7 L/min. (1.5 gpm) Insert (pkg. of 12)	Aerated	32.85

Outlets

FLOW	MODEL	DESCRIPTION		PRICE
	061104A	1.32 L/min. (0.35 gpm) Vandal Resistant Outlet (Male)	Spray	29.35
1.32 L/min.	061105A	1.32 L/min. (0.35 gpm) Vandal Resistant Outlet (Female)	Spray	34.55
(0.35 gpm)	061106A	1.32 L/min. (0.35 gpm) Outlet (Male)	Spray	16.20
	063256A	1.32 L/min. (0.35 gpm) Spray Outlet M24 x 1 (Male)*	Spray	33.35
	060726A	1.9 L/min. (0.5 gpm) Vandal Resistant Outlet (Female)	Spray	34.55
	060666A	1.9 L/min. (0.5 gpm) Outlet (Female)	Spray	16.20
	060667A	1.9 L/min. (0.5 gpm) Outlet (Male)	Spray	16.20
1.9 L/min. (0.5 gpm)	061203A	1.9 L/min. (0.5 gpm) Vandal Resistant Outlet (Male)	Laminar	30.60
(U.J gpiii)	061204A	1.9 L/min. (0.5 gpm) Vandal Resistant Outlet (Female)	Laminar	30.60
	RP31704	1.9 L/min. (0.5 gpm) Vandal Resistant Outlet (Male)	Spray	29.75
	RP31704SS	1.9 L/min. (0.5 gpm) Vandal Resistant Stainless Outlet (Male)	Spray	87.90
	060566A	3.8 L/min. (1.0 gpm) Vandal Resistant Outlet (Male)	Spray	31.65
	060941A	3.8 L/min. (1.0 gpm) Outlet (Female)	Aerated	15.40
3.8 L/min. (1.0 gpm)	060940A	3.8 L/min. (1.0 gpm) Outlet (Male)	Aerated	16.20
(1.0 gpiii)	061176A	3.8 L/min. (1.0 gpm) Vandal Resistant Outlet (Male)	Laminar	33.35
	061177A	3.8 L/min. (1.0 gpm) Vandal Resistant Outlet (Female)	Laminar	33.35
	060637A	5.7 L/min. (1.5 gpm) Antimicrobial Laminar Flow Vandal Resistant Outlet (Female)	Laminar	34.55
	060638A	5.7 L/min. (1.5 gpm) Antimicrobial Laminar Flow Vandal Resistant Outlet (Male)	Laminar	34.55
	060639A	5.7 L/min. (1.5 gpm) Vandal Resistant Outlet (Female)	Aerated	21.30
5.7 L/min.	060640A	5.7 L/min. (1.5 gpm) Vandal Resistant Outlet (Male)	Aerated	21.30
(1.5 gpm)	060641A	5.7 L/min. (1.5 gpm) Outlet (Female)	Aerated	16.20
	060642A	5.7 L/min. (1.5 gpm) Outlet (Male)	Aerated	16.20
	061178A	5.7 L/min. (1.5 gpm) Swivel Outlet M24 x 1 (Male)*	Laminar	30.60
	061118A	5.7 L/min. (1.5 gpm) Antimicrobial Outlet M24 x 1 (Male)*	Laminar	33.35
	060719A	8.3 L/min. (2.2 gpm) Outlet (Female)	Aerated	16.20
	060720A	8.3 L/min. (2.2 gpm) Outlet (Male)	Aerated	16.20
8.3 L/min.	060721A	8.3 L/min. (2.2 gpm) Vandal Resistant Outlet (Female)	Laminar	34.55
(2.2 gpm)	060722A	8.3 L/min. (2.2 gpm) Vandal Resistant Outlet (Male)	Laminar	34.55
	060723A	8.3 L/min. (2.2 gpm) Vandal Resistant Outlet (Female)	Aerated	21.30
	060724A	8.3 L/min. (2.2 gpm) Vandal Resistant Outlet (Male)	Aerated	21.30

Notes: Female thread 55/64" dia - 27 threads/inch. Male thread 15/16" dia - 27 threads/inch. *(Unless otherwise stated).




♦ DELTA

GROUP NO. 1 Regular Gooseneck

Rigid/Swivel Model	Rigid/ Swivel	Limited Swing Model	Limited Swing	" <i>I</i>	۸"	"0	; "	"[,,	ADD-ON SUFFIX	SPOUT
ONLY	Price	ONLY	Price	ММ	IN	ММ	IN	ММ	IN	NO.	DESCRIPTION
063087A	59.30	063063A	85.45	114	4.5	104	4.1	170	6.7	R2	Gooseneck Spout
063088A	64.65	063065A	91.95	152	6.0	124	4.9	146	5.8	R4	Gooseneck Spout
063089A	69.30	063066A	99.50	152	6.0	124	4.9	188	7.4	R5	Gooseneck Spout
063090A	69.30	063067A	100.15	152	6.0	124	4.9	229	9.0	R6	Gooseneck Spout
063091A	76.85	063068A	115.95	229	9.0	163	6.4	170	6.7	R7	Gooseneck Spout
061006A	67.95	_	_	152	6.0	124	4.9	94	3.7	R35	Gooseneck Spout


Note: Contact customer service for 1500T Series Fixed Spouts.



GROUP NO. 2 Smooth End-Flow Control In Base of Gooseneck Spout (Available on #7 outlets ONLY)

Rigid/Swivel Model	Rigid/ Swivel	" <i>F</i>	\ "	"(; "	"[_"	ADD-ON SUFFIX	SPOUT
ONLY	Price	ММ	IN	ММ	IN	ММ	IN	NO.	DESCRIPTION
060878A	67.40	114	4.5	97	3.8	178	7.0	R2	Gooseneck Spout w/FC
060872A	72.80	152	6.0	117	4.6	152	6.0	R4	Gooseneck Spout w/FC
060873A	77.85	152	6.0	117	4.6	196	7.7	R5	Gooseneck Spout w/FC
060875A	85.65	229	9.0	155	6.1	178	7.0	R7	Gooseneck Spout w/FC


Note: Contact customer service for 1500T Series Fixed Spouts.



GROUP NO. 4 Double Joint

Rigid/Swivel Model	Rigid/ Swivel	"/	٨"	"()"	"[,,	ADD-ON SUFFIX	SPOUT DESCRIPTION
ONLY	Price	ММ	IN	MM	IN	MM	IN	NO.	DESCRIPTION
063015A & 060269A	135.10 58.40	359	14.1	38	1.5	218	8.6	R17	Double Joint Spout

♦ DELTA

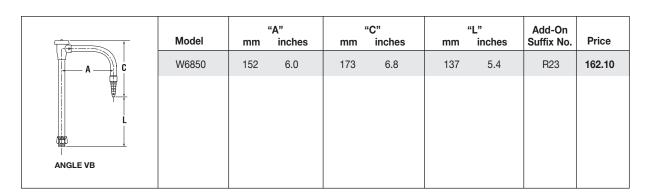

Laboratory Special Replacement Rigid/Swivel Goosenecks (Separate Orders)

	Model	mm "/	A" inches	"(mm	c" inches	mm "I	L" inches	Add-On Suffix No.	Price
A C	W6890-1	114	4.5	104	4.1	170	6.7	R2	73.90
	W6890-2	152	6.0	124	4.9	146	5.8	R4	82.65
l l	W6890	152	6.0	124	4.9	188	7.4	R5	82.65
<u> </u>	W6890-4	152	6.0	124	4.9	229	9.0	R6	90.10
REGULAR	W6890-5	229	9.0	163	6.4	170	6.7	R7	110.80

Replacement Swing Spouts (Separate Orders)

SWING SPOU	JT REPAIR PART		
Model	Description	Add-on Suffix No.	Price
063044A	8" "D" Section Spout	S2	65.65
060452A	6" Tubular Spout	S3	34.20
060269A	8" Tubular Spout	S5	58.40
060455A	11" Tubular Spout	S7	72.80
060456A	14" Tubular Spout	S8	88.15

Model	Description	Price
060003A	C.P. wall flange	12.90
060004A	1-1/2" spud flange	18.85
060022A	Handle screws & index kit (for 'T' products) includes:	58.25
	12 – short screws	
	12 – long screws	
	12 – red indexes	
	12 – blue indexes	
	1 – driver bit	
060026A	Gooseneck spout repair parts kit includes:	38.15
	1 – rigid collar	
	6 – retaining rings	
	6 – swivel rings	
	12 – "0" rings	
	1 – spout nut	
060027A	Cross handle w/ screw, red & blue button (for 28T9)	35.95
060028A	Pkg. of 12 – set screws	15.40
	2 – allen keys	
060030A	Pkg. of 6 – "0" rings	44.40
	6 – check units	
060032A	Pkg. of 4 – springs for self-close lever handle w/ L.H. structure	50.55
	(cold water side)	
060033A	Pkg. of 4 – springs for self-close lever handle w/ R.H. structure _	50.55
	(hot water side) and for 5 fluted self-close handles	
060034A	Stem structure complete w/ seat (for 28T9)	40.90
060037A	Pkg. of 2 – sani guards	32.45
060046A	2-3/4" lever handle w/ screw red and blue index (21B)	
060047A	R.H. structure, regular and long renewable seat (21B)	19.70
060048A	L.H. structure, regular and long renewable seat (21B)	19.70
060049A	Pkg. of 12 – fiber washers	19.35
	12 – rubber washers	
060051A	Pkg. of 12 – plug buttons	12.25
	Pkg. of 24 — spout "O" rings	
	Pail brace complete (for 28T9)	
060058A	Integral stop structure complete (for 28T9)	41.55
	Pkg. of 12 – "0" rings	
060072A	No. 6 x 2" V.P. spanner screws (2) and driver bit	32.55
	No. 10 x 2" V.P. spanner screws (4) and driver bit	
	Pkg. of 5 — springs	
060075A	Pkg. of 5 – plastic handle inserts	8.25
060076A	Pkg. of 12 – C.P. cover screws	25.10
	1 – driver bit	
	Cover and screw (non hold open model)	
	Pkg. of 12 – Cast cap screws	
	MO Pkg. of 12 – Diaphragms	
	Pkg. of 12 – Plug buttons	
	Pkg. of 20 — "0" rings	
060083A	Pkg. of 12 – Rubber washers	18.55
	12 – Fiber washers	
	Brass coupling nut	
	3/4" dia. C.P. brass split ring hanger	
	1-1/2" dia. C.P. brass split ring hanger	
	Seat washers (24/pkg.)	
060164A	3" single control lever handle	43.75
	Single inlet shank parts kit (for 28T9)	
060239A	Wheel handle and screw	5.50
N6N253A	3/4" x 19-1/2" VB Tube	108.60

Model	Description	Price
060254A	59" bedpan cleanser hose	70.1
060264A	Package of 2 sani-guards	26.6
060269A	8" Tubular swing spout complete	58.4
060271A	3" RCP VB spout complete	128.2
	Vandal resistant aerator	20.2
	2.2 gpm (8.3 L/min) Female aerator (for pre-1998 gooseneck spou	its)_ 15.4
060282A	Check structures complete (2 units, pre-1998)	63.5
060302A	Vacuum breaker repair parts kit	52.0
	Supply elbow/flange	
060310A	Flow control & sprayplate	11.4
060311A	CP insert	29.0
	1-1/2" TV elbow	
060318A	Flow control inserts only (6/pkg.)	28.5
	Battery holder	
	Wrench kit for brass renewable seat	
060342A	Plug & "O" ring for handle end	22.0
	Filter screen for FV (12/pkg.)	
	Single shank kit w/ 1.25" offset	
	12" flexible braided urinal hose	
	Union tail 1" longer	
	Union tail 2" longer	
	"O" ring kit (6/pkg.) for conn. lav	
	1-1/2" x 10" long VB tube	
	1-1/2" x 22-3/4" long VB tube	
	3/4" x 11.5" long VB tube	
	1-1/4" x 19.6" long trap seal tube	
	Deckmount assembly for Rigid/Swivel Spouts	
	Metal mounting hardware	
	Holddown package	13.5
	Holddown package (2 each locknuts, cplg. nuts, lockwashers)	9.8
	#3 square drive bit	
	Locknut	
	CP deck flange	
	Fiber washer (12/pkg.)	
	6" tubular swing spout	
	11" tubular swing spout	
		88.1
	3/4" spud nut, washers and flange pkg	
	Deck flange	
	Rubber washer (12/pkg.)	
	Wall flange and set screw (2/pkg.)	
	Diverter	
	Fiber gasket kit (12/pkg.)	
	Optional thin wall trim kit	
	Handle & screw kit	
	1-1/2" x 3/4" threaded adapter	
	3/4 " x 16" long rough tube - threaded one end	
	3/4 " IP coupling nut - chrome	
	1.75" long cover tube	
	"O" ring kit (6/pkg.)	
	Pre-rinse spring onlyCover tube & SS wall flange	
UUUUUUUA	CP cover w/ bumper seat lid	69.50 37.50

Model	Description	Price
060507A	Poppet pin for watercloset (3/pkg.)	21.50
	Poppet pin for urinal (3/pkg.)	
	Adapter	
060514A	Optional outlet tube - 16" long	46.65
	FP repair kit (1999 on)	
	4" hooded lever handle pkg. (1 handle, 1 screw, 1 alignment inser	
	red and blue indexes)	
060544A	Alignment insert (12/pkg.)	20.75
060546A	4" plate and holddown package	74.00
	8" plate and holddown package	
060553A	CER-TECK® structure "O" ring kit (24/pkg.)	16.70
	CER-TECK® bottom seal (24/pkg.)	
	Single hole deck gasket	
	VR 1 gpm flow control non-aerating spray outlet	
	3/4" coupling nut & washers	
	12" SS cover	
	Balanced lever handle w/ 1 screw,1 red and 1 blue index	
	Mounting hardware (1 gasket, 1 locknut)	
	Cover plate and mounting hardware	
060586A	Flexible SS supply tubes (2/pkg.) 3/8" compression connectors _	88.65
060590A	Spout w/ adj. bracket - No VB 8" Spout w/ adj. bracket - Ang VB 5 3/4"	_305.10
	Straight wall brace assembly	
	Fork wall brace assembly	
	3" hooded lever handle & screw	
	4" blade handle w/ screw, 1 red & 1 blue index, alignment insert_	
	Female V.R. 1.5 gpm (5.7 L/min) laminar w/ antimicrobial	
	Male V.R. 1.5 gpm (5.7 L/min) laminar w/ antimicrobial	
	Female V.R. 1.5 gpm (5.7 L/min) flow control aerator	
	Male V.R. 1.5 gpm (5.7 L/min) flow control aerator	
	Female 1.5 gpm (5.7 L/min) std. flow control aerator	
	Male 1.5 gpm (5.7 L/min) std. flow control aerator	
	3 position switch add-on package keyed switch	
	Slow close foot pedal cartridge (1999 on)	
	ADA metering handle (plain)	
	ADA metering handle (red)	
000055A	ADA metering handle (blue)	58.30
	4" deck gasket for 86T ADA metering (3/pkg.)	
	4" deck gasket for 87T151 (3/pkg.)	
	Checks for 060659A (6/pkg.)	
	Holddown pkg. for 87T single hole	
	Female std. 0.5 gpm (1.9 L/min) outlet	
	Male std. 0.5 gpm (1.9 L/min) outlet	
	3/4 " NPS solenoid valve	
	10" x 10" stainless cover w/ override 14" x 14" stainless cover w/ override	
	Sensor module - washdown urinal	
	Override button	
	Solenoid extension cable 48" (1600T)	
	Battery holder (1600T) 4 C cells fla	
	24 VAC to 6 VDC converter	
	Battery holder (1600T) 4 C cells Sq	
	oaltery notice (10001) 4 C cens sq 0.5 gpm (1.9 L/min) insert only	
	1.5 gpm (5.7 L/min) antimicrobial	
	1.5 gpm (5.7 L/min) insert only	
000000A	Shiri (ou Punin) mont only	02.00

Model	Description	Price
060691A	Tube, urinal	23.9
	Adj. TV ret. ring	
	Oscillating handle	
	3/4" C adaptor	
	1/2" C X MIP adaptor	
060697A	1" copper inlet adaptor	19.2
	3/8" IP X M Aerator thd adaptor	
060704A	20VA transformer	66.0
060705A	CP diverter spout	53.5
060708A	CP 3/8" FIP x 3/8" FIP VB	126.1
060710A	Shower arm trim S/A	40.9
060712A	Remotrol parts pkg	39.3
060715A	Straight VB	69.0
060718A	Bracket holder S/A	46.9
060719A	Aerator, female, .859 THD, 2.2 gpm	16.2
060720A	Aerator, male, .937 THD, 2.2 gpm	16.2
060721A	Moderator, female, 2.2 gpm	34.5
	Moderator, Male, 2.2 gpm	
	VP aerator (female) & key S/A, 2.2 gpm	
	VP aerator (male) & key S/A, 2.2 gpm	
060726A	VP aerator (0.5 gpm), Female, S/A	34.5
060728A	Bedpan cleanser w/ stop	244.2
060729A	Bedpan cleanser LESS stop	152.7
060735A	Union nut	12.7
060755A	Cage & P.B. S/A	58.2
	Flange & pin S/A	
	CP 3/8" IP angle VB	
060764A	1 x 3/4" MIP X FIP flush bushing	27.8
	VP aerator key	
	40VA transformer	67.1
	1-1/2" TV offset VB & coupling Ring	253.9
	1-1/2" RGH coupling nut S/A	
	Diaphragm & guide S/A	
	1 1/2" TV outlet tube & tee S/A	
	TECK II 1-1/2" x 10" VB S/A	
	TECK II 1-1/2" x 22-3/4" VB S/A	132.2
	TECK II 3/4" x 11-1/2" VB S/A	
	VB sleeve M.O	15.6
	Aerator x 1/2" MIP adaptor	
	Hose end VB S/A	
	30 deg. inst. shower head S/A	
	TECK* fluted handle & screw S/A	
	Vacuum breaker S/A w/ gasket	
	Universal TV washer repair kit	
	Universal TV handle kit	
	Short spout S/A	
	Lever handle & screw S/A	
	Handle cage S/A	
	Osc. handle & flange S/A	
	1-3/8" PB & flange S/A	
	Stream straightener & VP key	
	Set screw flange S/A	
	PB control unit Complete	
	Handle. gland & sleeve S/A	
	Bedpan structure Push button & set screw kit	

Model	Description	Price
060843A	Retrofit kit - TECK II exposed	40.00
	Repair kit - check/stop	
060845A	Retrofit kit - TECK II concealed	41.90
060848A	SC cartridge kit	48.05
	Vacuum breaker insert	
	1" UAS stop assembly	
	UAS L/nut & tail S/A	
	1" Conc UAS complete	
	4" blade handle & screw sub-assembly	
	6" wrist handle & screw S/A	
	Flow control gooseneck spout	
	Handle control unit & bracket	
	1-1/2" x 16" tube	
	1-1/2" x 6.62" L tube	
	Anchor plate & cap S/A	
	Cover screws for 81T	
	36" solenoid extension cord for 81T	
	Cover gasket	
	Surface mount housing	
	Oriver board for 1500T	
	Solenoid holder	
	Screen assembly	
	Lotion w/ moisturizers soap refill	
	Soap dispenser plug-In transformer	
	Soap dispenser 24 VAC to 6 VDC converter	
	Nuts for 1600T recessed (12/pkg.)	
	Retrofit kit for 1000T6 WC w/ 12" frame	
	Retrofit kit for 1000T6 UR w/ 12" frame	
	Retrofit kit for 1000T9 washdown w/ 10" frame	
	E-soap spout assembly metal	
	Motor housing assembly	
	1.0 gpm (3.8 L/min) male aerator	
	Female std. 1.0 gpm (3.8 L/min)	
	3" hooded lever handle PR. H/C-TI w/ screws	
	4" blade handle PR. H/C-TI w/ screws	60.80
	4" hooded lever handle PR. H/C-TI w/ screws	
	Adapter kit for DEFM 100	
	Adaptor kit for DEFM-100	
	Plug-in transformer for DEMD	
	Battery box (6 x 1.5AA) for DEMD	
	Aerator pkg. 0.5 gpm for DEMD	
	Aerator pkg. 1 gpm for DEMD	
	Escutcheon kit for DEMD	
	Holddown pkg. for DEMD	
	Sensor kit for DEMD	
	Solenoid valve kit for DEMD	
	Remote control for DEMD	
	Extension cable for DEMD	
	1.75 gpm insert kit for cast shower head	
	1.5 gpm outlet for 22C w/ wrench flats	
	Hardwire converter (DEMD Series) 24VAC to 9DC	
	Driver board for 860T Series	
	Push button extension cord for 860T Series	22.60

Model	Description	Price
060986A_	4" SS cover & screws for 860T #6 control box	105.65
	30 deg. Inst. shower head 1.75 gpm	
	Rigid swivel gooseneck w/ aerator adaptor	
	1.5 gpm insert kit for cast shower head	
	30 deg inst shower head – 1.5 gpm	
	Adapter kit (DEMD-800)	
	TECK I parts kit	
	6.0 L (1.6 gal) Adj cap assembly for 81T-Manual	
	TECK I & II cover cap & reg. screw	
	TECK II reg screw & "O" ring assembly	
	Univ TV parts repair kit	
	Gasket for 591T (3/pkg.)	
	0.5 gpm outlet – 500-HDF Series	
	Aerator key for 500-HDF Series	
	Solenoid valve kit for DEMD WM	
	Sensor kit for DEMD WM	
	Escutcheon kit for DEMD WM	
	Conduit for DEMD WM	
	Battery box for DEMD WM	
	Hardwire converter w/ battery backup	
	T13H handle kit for shower valve	
	Set screw & button	
	Temperature knob, cover & screw	
	Diverter handle, screw & button	
	Diverter valve	
	Replaceable lens	
	Hardwire converter & rigid connection assembly	
061104A	0.35 gpm (1.32 L/min.) V.R. outlet Male	29.35
	0.35 gpm (1.32 L/min.) V.R. outlet Female	
	0.35 gpm (1.32 L/min.) standard outlet Male	
	0.5 outlet for 100HDF-DST series	
	Careguard 1.5 gpm laminar male	
		206.80
	2 lever handles w/ 2 screws, red and blue index buttons_	32.10
	2 ceramic cartridges, hot and cold	
	Extension kit for 060852A diverter valve	
	Gasket retrofit kit for 061134A (3/pkg.)	
	Cover screws for 3rd gen. E-FV (2011)	
	Metal cover for 3rd gen. E-FV (2011)	
	Metal cover for 3rd gen. E-FV (2011) Matte Black	
	Cover gasket (3/pkg.) for 3rd gen. E-FV (2011)	
	W.C. repair kit for 3rd gen. E-FV (2011)	
	UR repair kit for 3rd gen. E-FV (2011)	
061144A	WC w/ dual flush repair kit for 3rd gen. E-FV (2011)	470.5
	DEMD-86000 sensor kit	
	DEMD-86000 seals and screw kit	
	Spacer pkg. for high rise Prox	
	Spacer pkg. for 4" CS Prox	
	4" Deck plate and holddown pkg	
	8" Deck plate and holddown pkg	
	Sensor DEMD-201/211	
	Sensor DEMD-101/111	
	Solenoid valve kit DEMD-101/11 1/201/211	
UU110/A	Adapter for vacuum breaker tube DEMD-86000DEMD 101/111 hardwire converter	

Model	Description	Price
	6.0 L (1.6 gal) Adj cap assembly for E-81T & 1600T6	
061171A	Tubular spout for 28P44	31.30
	Gooseneck spout for 28P49	
	Angular spout for 28P42	
	HDF Proximity spacer package	
	VR Male 1.5 gpm laminar outlet	
	VR Female 1.5 gpm laminar outlet	
	1.5 gpm laminar swivel outlet for DEMD	
061191A	Elbow & tee for R3070-MIXTLF	54.85
	Volume control handle assembly for T17TH	
	4 x 4 x 4 Box w/ bushing & guard	
	Vandal resistant male 0.5 gpm laminar outlet	
	Vandal resistant female 0.5 gpm laminar outlet	
	Proximity Clip-On Sensor Module	
	Wallmount sensor trim kit (red)	
	Wallmount sensor trim kit (blue)	
	WC retrofit complete (incl. cover, cap, diaphragm/guide and pin)_	
	UR retrofit complete (incl. cover, cap, diaphragm/guide and pin) _	
	Non hold open retrofit kit	
	Non hold open conc retrofit kit WC	
	Non hold open conc retrofit kit UR	
	4" x 4" SS cover for 81T WMs	
	Retrofit kit BT E-FV WC 2nd gen to 3rd gen w/s&g	
	Retrofit kit BT E-FV UR 2nd gen to 3rd gen w/s&g	
	Retrofit kit HW E-FV WC 2nd gen to 3rd gen w/s&g	
	Retrofit kit HW E-FV UR 2nd gen to 3rd gen w/s&g	
	Metering urinal cartridge	
	Bedpan diverter assembly	
	6.0 L (1.6 gal) Adj cap assembly for 83T Manual	
	Oscillating handle	
	Urinal push button metering retrofit kit	
	Urinal push button and set screw kit Tube and adaptor S/A	
	4" x 4" SS cover for 1600T6	
	Oscillating handle metering retrofit kit	
	Oscillating handle and bonnet kit	
	Outlet tube w/ dual checks (for 86T5 & DEMD-86)	
	Dual Driver Board H20ptics and Proximity	
	Battery holder - square 4-AA version	
061255A	36" extension cable (H2Optics/Proximity combo board)	13.30 54.35
	Holddown pkg	
	Proximity Dual Board Grounding Wire	
	Spout plate 4" x 4"	
	Pkg. of 3 - 0.5 gpm laminar outlet	
	Pkg. of 3 - 1.0 gpm laminar outlet	
	Pkg. of 3 - 1.5 gpm laminar outlet	
	4" plate assembly - Chrome	
	4" plate assembly - Matte Black	
	4" plate assembly - SS	
	8" plate assembly - Chrome	
	Proximity Conversion Kit	
061272A	Sensor module for WC - WMs & 1600T	333.85
	Sensor module for UR - WMs & 1600T	
	Cover, screws & bit	
	2.0 gpm Insert Kit for Cast Shower Head w/ Flow Control	
	& Sprayplate	

Model	Description	Price
061280A	UR retrofit kit for WM FVs	659.25
	WC retrofit kit for WM FVs	
	UR retrofit kit for 1600T6 FVs	
	WC retrofit kit for 1600T6 FVs	
061286A	UR retrofit kit for 1600T6 FVs	589.0
061287A	WC retrofit kit for 1600T6 FVs	589.0
061292A	3000T Adapter Cable	35.8
061296A	Pkg. of 3 - 2.2 gpm laminar outlets	91.6
061297A	590-HDF 3rd Gen Driver Board	193.1
061298A	590-HDF 3rd Gen Extension Cable	37.7
061299A	HW to BT conversion kit for 1600T & WMs	55.9
061300A	Pkg. of 6 - hose washers	7.9
061301A	Flush Valve Stop with Cap	129.70
	4" Rectangular plate assembly	
061305SS	4" Rectangular plate assembly	97.20
	0.35 gpm spray outlet (3/pkg)	
	DESD-750 hardwire converter	
	DESD-750 remote control	
	0.17 gal/cycle (0.66 gpm outlet)	
	Sensor/controller for DEMD-611	
	Escutcheon kit for DEMD-611	
	Sensor kit for DESD-750	
	Soap bottle 1 L for DESD-750	
	Soap dispenser pump assembly	
	Battery box for DESD-750	
	Bottle support 1 L for DESD-750	
	Push button/cage/button cap nut	
	WC diaphragm/guide	
		33.75
	6.0 L (1.6 gal) Adj cap assembly for 81TBTA-MMO	
	Solar cell assembly - DEMD	
	Battery pack - DEMD	
	Solenoid - DEMD	
	Holddown pkg - DEMD	
	Solar PCB/sensor - DEMD	
	Filter screen for solar - DEMD Hose for DEMD-320LF	121.50
	Hoses for DEMD-321LF Aerator outlet for DEMD-320/321LF	
	O.5 L (0.125 gal) fixed cap assembly for 81T manual FV	
	1.9 L (0.5 gal) fixed cap assembly for 81T manual FV	
	4.8 L (1.27 gal) fixed cap assembly for 81T manual FV	
	6.0 L (1.6 gal) fixed cap assembly for 81T manual FV	
	1.9 L (0.5 gal) Adj. cap assembly for 81T manual FV	
	0.5 L (0.125 gal) fixed cap assembly for 81T & 1600T6	
	1.9 L (0.5 gal) fixed cap assembly for 81T & 1600T6	
	4.2 L (1.1 gal) fixed cap assembly for 81T & 1600T6	
	4.8 L (1.27 gal) fixed cap assembly for 81T & 1600T6	
	6.0 L (1.6 gal) fixed cap assembly for 81T & 1600T6	
	1.9 L (0.5 gal) Adj. cap assembly for 81T & 1600T6	
	0.5 L (0.125 gal) fixed cap assembly for 83T manual FV	
	1.9 L (0.5 gal) fixed cap assembly for 83T manual FV	
	4.8 L (1.27 gal) fixed cap assembly for 83T manual FV	
	6.0 L (1.6 gal) fixed cap assembly for 83T manual FV	
	1.9 L (0.5 gal) Adj. cap assembly for 83T manual FV	
	13 L (3.4 gal) Adj. cap assembly for 81T retrofit kits	

)61353A	-	
	0.5 L (0.125 gal) fixed cap assembly for 81T-MMO	362.10
	4.2 L (1.1 gal) fixed cap assembly for 81T-MMO	
	4.8 L (1.27 gal) fixed cap assembly for 81T-MMO	
	1.9 L (0.5 gal) Adj. cap assembly for 81T-MMO	
	W.C. E-flush valve (E-board & button)	
	UR E-flush valve (E-board & button)	
061365A	RP43381 w/060710A (#2 head kit for T13H & T17TH)	102.6
	52672-15-BG w/060710A (#3 head kit for T13H & 860T)	
	RP38357 w/060710A (#3 head kit for T17TH)	
	RP46384 w/060710A (#8 head kit for T13H)	
	Springs for #8 self-close lever handles (1LH, 1RH)	
	Springs for #9 self-close fluted handles (2RH)	
	Wrist Blade (#5) handle kit (2 handles, screws, saniguard, indexes)	
	Mounting bracket for 1 L soap bottle – DESD-750/751	
	1.9 L (0.5 gal) fixed cap assembly for E-81T-MMO	
	4.2 L (1.1 gal) fixed cap assembly for 81T manual FV	
	UR guide assembly (MMO, 2018)	
	Brass seat	
	Washer for 3rd gen. WC (3/pkg.)	
	3/8" x 3/8" compression polymer hose	
	RH CER-TECK® cartridge	
	LH CER-TECK* cartridge	
	Structure repair kit	
	R.H. TECK* structure kit	
	L.H. TECK° structure kit	
	WM gooseneck spout	
	Renewable seats (12/pkg.)	
	Spout base only for DJ spout	
	Pre-rinse retrofit kit	
	Deckmount gooseneck assembly	
	Tee assembly	
	Cast spout I/ hole	
	Center body — 10-1/2" long	
)63031A	Center diverter body	106.3
	Center body — 6-1/2" long	
)63033A	Spout adapter & fiber gasket	_34.5
063034A	Shank & washer kit	_34.6
063041A	Long renewable seat	4.6
	8" wallform swing spout	
063046A	Hose end adapter	_15.4
063049A	Escutcheon & fiber washer	_38.1
)63054A	CER-TECK® retrofit pkg	_41.5
)63055A	Gooseneck spout adapter and gasket	_28.7
063056A	Swing spout adapter and gasket	_28.7
063057A	C Series widespread renewable seat	_19.5
	Limited swing gooseneck	
	Gooseneck spout adapter pkg.	
	Gooseneck spout	

Model	Description	Price
063091A	Gooseneck spout	76.85
	RHCP brass TUF-TECK® structure kit	
	LHCP brass TUF-TECK® structure kit	
063103A	Deckmount gooseneck spout	126.40
063104A		
063105A	Offset shank & rubber washer	144.05
063106A	Check structure, gasket & cap	192.35
063107A	3" hooded lever handle, CER-TECK®	72.25
	4" blade handle w/ sani guards, CER-TECK°	
	CP adapter	
063120A	Escutcheon & fiber washer swing spout inline	73.10
063121A	Retrofit pkg. 4" hooded lever CER-TECK°	77.40
063125A	Single post cast Proximity	375.55
	4" cast Proximity	
063129A	590 HDF Proximity Series spout assembly	270.80
063130A	Mixing Tee & Checks for 87T Series	88.90
063132A	590T spout assembly	390.75
	591T spout assembly	
063135A	Screwdriver stop repair kit	11.85
063136A	Thermostatic mixing valve 3/8"	170.05
063140A	Adapter w/ flow control (1.5 gpm)	8.05
063141A	590-HDF LF spout assembly	270.80
063161A	Thick mount kit (nut, washer, gasket, shank, 1/4" NPT pipe)	34.80
063162A	1.5 gpm adapter w/ flow control	49.50
063164A	Check Valves for R2570-MIXLF	12.75
063171A	Check tail assembly	48.05
063173A	Hose assembly & insulated grip	149.50
063174A	Spray head & hold open ring	162.10
063178A	Foot pedal cartridge	93.75
063179A	Thermo mixing valve w/gaskets	308.30
	10 mm to 3/8" compression kit	
063183A	Single hole mount turret assembly	396.85
	Single hole mount turret assembly	
063188A	Single hole mount turret assembly	385.30
063190A	Single hole mount turret assembly	385.30
	Single hole mount turret assembly	
063196A	VR 1.5 gpm WM shower head complete	221.10
063202A	Single hole mount turret assembly	385.30
063204A	Single hole mount turret assembly	385.30
063207A	Single hole mount turret assembly	385.30
063210A	590T spout assembly	415.50
	591T spout assembly	
063214A	VR 2.0 gpm WM shower head complete	221.10
063218A	Slip on spout inner "O" ring (12/pkg.)	7.70
063219A	Slip on spout complete 1.5 gpm	227.65
	Slip on spout rough in box	
063222BL_	0.5 gpm gooseneck spout for 620TP - Matte Black	267.35
	Pkg. of 2 - coupling nuts	
063226BL_	1.0 gpm gooseneck spout for 620TP - Matte Black	267.30
063227BL	1.5 gpm gooseneck spout for 620TP - Matte Black	267.35
	2.2 gpm gooseneck spout for 620TP - Matte Black	
	590-HDF 3rd Gen Spout Assembly	
	Solenoid kit for DEMD-86 (2015)	
	2.2 gpm Smooth End Gooseneck/Sensor (R5) for 1500T3	
063238A	2.2 gpm Smooth End Gooseneck/Sensor (R35) for 1500T3	396.85
	2.2 gpm Smooth End Gooseneck/Sensor (R5) for 1500T4	

WISCONSIN

Eastern Region

(800) 246-8440

Western Region

530 Progress Drive

Hartland WI 53029

Fax (800) 246-6464

NCS Corp. 7440 West 78th Street

Fax (952) 941-0396

150 Capital Dr., #420 Golden, CO 80401

Fax (303) 286-9069

(303) 289-4191

WYOMING

Bloomington, MN 55439 (952) 941-4464

Rocky Mountain Sales, Inc.

Midwest Sales & Marketing

C160

Model	Description	Price
063242A	2.2 gpm Smooth End Gooseneck/Sensor (R35) for 1500T4	396.85
063246A	0.35 gpm spout 630TP-chrome	243.80
063246SS	0.35 gpm spout 630TP-SS	275.55
063247A	0.5 gpm spout 630TP-chrome	242.80
063247SS	0.5 gpm spout 630TP-SS	235.95
063248A	1.5 gpm spout 630TP-chrome	240.20
	1.5 gpm spout 630TP-SS	
063250A	Thermostatic cartridge assembly	383.00
063251A	Solenoid for DEMD-611	99.20
063252A	Hoses and deckmount kit for DEMD-611	254.95
063253A	Threadlocker 0.5 ml (loctite)	14.30
063254A	Hold down package	9.75
	0.5 GPM VR spray cache outlet	
063256A	0.35 gpm spray outlet M24X1 for DEMD series	33.35
063257A	3/4" solenoid w/adaptors for 3/8" compression	79.40
063258A	Surface box (less driver board and battery holder)	100.10
063259A	Solar flush valve cover & set screw	47.35
063260A	Solar flush valve module & screws	131.05
063261A	Solar flush valve sensor & screws	535.50
063262A	Solar flush valve locking ring	26.10
063264A	1.0 GPM laminar outlet for DEMD-611	40.45
063277A	Spray head and hold open ring (1.05 gpm)	162.10
068030A	Pol DW valve handle	6.65
068032A	Tail	10.70
068041A	CP (ball valve) nozzle	16.30
068047A	Tail & locknut pkg	17.30
068049A	CP FE nozzle	14.70
068056A	Repair DW stem & dphgm	19.70
068057A	(CW) Cold water index button (3/pkg.)	15.40
068062A	(HW) Hot water index button (3/pkg.)	15.40
068072A	(AIR) Air index button (3/pkg.)	15.40
068074A	(GAS) Gas index button (3/pkg.)	15.40
068092A	3/8" cplg. nut & 1/4" tail conn. pkg	18.55
	Repair DW stem kit	
068128A	W6629 repair kit	85.15

Model	Description	Price
H78	_LG blade handle w/ screw-moni	36.20
	_Brass lever handles w/ screws	
	Handles - wrist blade - w/ screws	
RP21874	Lever handle w/ set screw - chrome	28.20
RP30522	Model 591 gasket	7.00
RP30528	Cast cover plate	105.15
RP31704	0.5 gpm V.R. spray outlet	29.15
RP31704SS _	0.5 gpm V.R. spray outlet SS	87.90
RP31705	1.5 gpm V.R. spray outlet	27.75
	Hardwire transformer	
RP32796	24" grab bar w/ adjustable slide	163.20
	Plug-in transformer	
	_8" cover plate	
	Single hole ceramic cartridge (for 22C)	
	_4" ceramic cartridge (for 22C)	
	Handle w/ button and set screw (for 22C)	
	_Cap (for 22C)	
	Single hole mounting hardware (for 22C)	
	Extension nut/washer for electronic	
	Gasket for 22C (4")	
	Gray cam, w/ stops	
	Delta handle	
	HDF handle & set screw	
RP72773	Valve assembly for slow close	63.35
	Angle VB gooseneck	
	Flow control aerator and spout end adapter, 3/8" F.I.P. inlet	
	Rigid/swivel gooseneck	

ALABAMA

Will & Pierce Agency 6612 Pinehill Road Daphne, AL 36526 (251) 621-1550 Fax (251) 621-3036

ALASKA

Almex Alaska, LLC 907 E. Downing St., #23 Anchorage, AK 99518 (907) 346-4669 Fax (907) 346-4675

ARIZONA

Bobier Sales, Inc. 2125 F. Jones Avenue Phoenix, AZ 85040 (602) 304-0001

ARKANSAS

Rich Sales, Inc. P.O. Box 241010 Little Rock, AR 72223 (501) 868-9711 Fax (501) 868-9787

Northern Region Mega Western Sales North 1939 Alpine Way Hayward, CA 94545 (800) 304-3909 Fax (310) 323-7921

6861 Walker Street La Palma, CA 90623 (800) 304-3909 Fax (310) 323-792

Rocky Mountain Sales, Inc. 150 Capital Dr., #420 Golden, CO 80401 Fax (303) 286-9069

CONNECTICUT

Futura Sales 1451 Concord St. Suite 6 Framingham, MA 01701 (508) 788-9257 Fax (508) 788-9258

DELAWARE

DISTRICT OF COLUMBIA

Barger and Associates 101 Production Dr., Suite 104 Yorktown VA 23693 (757) 873-4574 Fax (757) 873-9530

FLORIDA

Carr Company 6000 Park of Commerce Way Suite A Boca Raton, FL 33487 (800) 578-CARR (2277) Fax (561) 997-2633

Carr Company 6306 Benjamin Rd. Suite 614 Tampa, FL 33634 (813) 901-8552 Fax (813) 901-8555

Panhandle Counties Will & Pierce Agency 6612 Pinehill Road Daphne, AL 36526 (251) 621-1550

Fax (251) 621-3036

Pulley & Associates 430 Lovena Drive S.E., Suite 200 Marietta, GA 30067 (770) 425-0706 Fax (770) 428-3934

HAWAII

J & B Marketing 119 Merchant Street Suite 610 Honolulu, HI 96813 Fax (888) 965-9604

IDAHO

Southern Region

(801) 782-0100

Northern Region

Suite 212

ILLINOIS

Fax (801) 782-2021

Mountain West Marketing

3147 North Highway 89 Pleasant View, UT 84404

Synergy Sales NW, LLC

12835 Bel-Red Road,

Bellevue, WA 98005 (425) 502-7944

Fax (425) 502-9026

Northern Region

Added Sales Co.

795 Mittel Drive

(630) 694-1300

Wood Dale II 60191

Fax (630) 694-9148

Central & Southeastern Region

Added Sales Co. - South

140 Lewis Park Drive

Mount Zion II 62549

Fax (217) 864-1478

Southwestern Region

1803 E. 123rd Terrace

Summit Sales, Inc.

Olathe KS 66061

Fax (913) 791-9598

Fishers, IN 46038

Fax (317) 867-5949

2001 SE 44th Court

Grimes, IA 50111

Fax (515) 986-355

Olathe KS 66061

(515) 986-9446

KANSAS

Mid America Sales Group, Inc.

(317) 867-3799

INDIANA

IOWA

GEORGIA

Fax (602) 304-000

CALIFORNIA

Southern Region Mega Western Sales South

COLORADO

BDA-IN 8100 E 106th St.

Sussex County Barger and Associates 101 Production Dr., Suite 104 Yorktown, VA 23693 Fax (757) 873-9530

Rich Tomkins Company, Inc. 235 Bridgewater Road Ashton, PA 19014 (610) 859-3552 Fax (610) 859-6080

Fax (913) 791-9598 KENTUCKY BDA-KY, LLC 11321 Decimal Drive

LOUISIANA Will & Pierce Agency - West 13405 Seymour Meyers Blvd. Unit 20 Covington, LA 70447 (985) 273-0229

(502) 243-0142

MAINE

Futura Sales 1451 Concord St. Suite 6 Framingham, MA 01701 (508) 788-9257 Fax (508) 788-9258

Fax (985) 400-2498

MARYLAND

Barger and Associates 101 Production Dr., Suite 104 Yorktown, VA 23693 (757) 873-4574 Fax (757) 873-9530

MASSACHUSETTS

Futura Sales 1451 Concord St. Suite 6 Framingham, MA 01701 (508) 788-9257 Fax (508) 788-9258

MICHIGAN

Burke Agency Inc. 2605-A Oakley Park Road Walled Lake, MI 48390 (248) 669-2800 Fax (248) 669-3310 Western Half of Upper Michigan

Midwest Sales & Marketing 530 Progress Drive Hartland, WI 53029 (800) 246-8440 Fax (800) 246-6464

MINNESOTA

NCS Corp. 7440 W. 78th Street Bloomington, MN 55439 (952) 941-4464 Fax (952) 941-039

MISSISSIPPI

Will & Pierce Agency - West 13405 Seymour Meyers Blvd. Unit 20 Covington, LA 70447 (985) 273-0229 Fax (985) 400-2498

MISSOURI

Eastern Region Summit Sales Inc. - East 2057 Lick Creek Drive Wentzville, MO 63385 (913) 791-9599 Fax (913) 791-9598 Fax (704) 527-0539

Western Region Summit Sales Inc. - West 1803 Fast 123rd Ter Olathe, KS 66061 (913) 791-9599 Fax (913) 791-9598

MONTANA

NEBRASKA

Rocky Mountain Sales, Inc. 150 Capital Dr., #420 Golden, CO 80401 (303) 289-4191 Fax (303) 286-9069

Western Region Rocky Mountain Sales, Inc. Summit Sales, Inc. 1803 E. 123rd Terrace 150 Capital Dr., #420 Golden, CO 80401 (303) 289-4191

> Central/Eastern Region Mid America Sales Group, Inc. 2001 SE 44th Court Grimes, IA 50111 (515) 986-9446

Fax (303) 286-9069

Fax (515) 986-3552

NEVADA

Northern Region Mega Western Sales North 1939 Alpine Way Hayward, CA 94545

> Fax (310) 323-7921 Southern Region Mega Western Sales South 6861 Walker Street La Palma, CA 90623

(800) 304-3909

(800) 304-3909

NEW HAMPSHIRE

Futura Sales 1451 Concord St. Suite 6 Framingham, MA 01701 (508) 788-9257 Fax (508) 788-9258

NEW JERSEY

Northern Region 1040 Wilt Ave. 2nd Floor Ridgefield, NJ 07657 (201) 871-0500 Fax (201) 871-0314

Southern Region

Western Region Rich Tomkins Company, Inc. 235 Bridgewater Boad (610) 859-3552 Fax (610) 859-6080

NEW MEXICO

W W Sales Company 3500 Richmond Dr., N.E., Suite A Albuquerque, NM 87107 (505) 878-0636

NEW YORK

NY Metro and Long Island 1040 Wilt Ave. 2nd Floor Ridgefield, NJ 07657 (201) 871-0500 Fax (201) 871-0314 Upstate Region Twin "D" Associates, Inc.

(518) 862-9500 Fax (518) 464-3410

Latham, NY 12110

NORTH CAROLINA Smith & Stevenson Co., Inc. P.O. Box 240009 Charlotte, NC 28224 (704) 525-3388

1182 Troy Schenectady Road

NORTH DAKOTA

NCS Corp. 7440 W. 78th Stree Bloomington, MN 55439 (952) 941-4464 Fax (952) 941-0396

OHIO

Libb Company, Inc. 7860 N. Central Dr. Lewis Center, OH 43035 (740) 549-1516 Fax (740) 548-098

OKLAHOMA

NSC Marketing Group 46 East Hill St Oklahoma City, OK 73105 (405) 602-2800 Fax (405) 602-2824

OREGON

Synergy Sales NW, LLC 16701 SE McGillivray Blvd Suite 100 Vancouver, WA 98683 425-502-7944 Fax (425) 502-9026

PENNSYLVANIA

Fax (412) 257-2303

Eastern Region Rich Tomkins Company, Inc. 235 Bridgewater Road Ashton PA 19014 (610) 859-3552 Fax (610) 859-6080 Western Region Triangle Sales 412 Darby Way, Suite 3 Bridgeville, PA 15017 (412) 257-2300

RHODE ISLAND

Futura Sales 1451 Concord St. Suite 6 Framingham, MA 01701 (508) 788-9257 Fax (508) 788-9258

SOUTH CAROLINA

Smith & Stevenson Co., Inc. P.O. Box 240009 Charlotte, NC 28224 (704) 525-3388 Fax (704) 527-0539

SOUTH DAKOTA

Rocky Mountain Sales, Inc. 150 Capital Dr., #420 Golden, CO 80401 Fax (303) 286-9069 Central/Eastern Region NCS Corp.

7440 W. 78th Street

(952) 941-4464

Fax (952) 941-0396

Bloomington, MN 55439

TENNESSEE

Pulley & Associates 430 Lovena Drive S.E., Suite 200 Marietta, GA 30067 (770) 425-0706 Fax (770) 428-3934

TEXAS

Southwest Sales Inc. 910 S. Freeport Parkway, Suite 300 Coppell, TX 75019 (972) 881-8757 Fax (972) 881-2115 Counties of El Paso. Culherson, Reeves, Hudspeth, Jeff Davis, Pecos, Brewster, Terrell & Presidio

W W Sales Company 3500 Richmond Dr., N.E. Suite A Albuquerque, NM 87107 (505) 878-0636

Fax (505) 878-0638

UTAH

Mountain West Marketing 3147 North Highway 89 Pleasant View, UT 84404 (801) 782-0100 Fax (801) 782-2021

VERMONT

Futura Sales 1451 Concord St. Suite 6 Framingham, MA 01701 (508) 788-9257 Fax (508) 788-9258

VIRGINIA

Barger & Associates 101 Production Dr., Suite 104 Yorktown, VA 23693 757) 873-4574 Fax (757) 873-9530

WASHINGTON

Synergy Sales NW, LLC 7074 S 220th St Kent, WA 98032 425-502-7944 Fax (425) 502-9026

WEST VIRGINIA Northeastern Region

Barger and Associates 101 Production Dr., Suite 104 Yorktown, VA 23693 Fax (757) 873-9530

Triangle Sales 412 Darby Way, Suite 3 Bridgeville, PA 15017 (412) 257-2300 Fax (412) 257-2303

Unparalleled Support

Delta Faucet Company has an office in virtually every major city in the United States. Delta® agencies are staffed nationwide with more than 400 highly experienced sales professionals who live and work in your market to meet your needs at a local level promptly and efficiently. Your local representative will assume responsibility for communication throughout the supply chain, becoming an extension of your business to ease everyday tasks and troubleshoot. Your agency is readily available to assist with customer service, stocked warranty and service parts, provisioning and training, literature and displays. This level of advanced service is brought to you only by Delta Faucet Company.





C162



WARRANTY

These Delta® products are warranted to the original consumer purchaser or commercial user. Please refer to the "Limited Warranty" enclosed with each Delta product for specific details. Additional copies are available upon request.

RETURNED GOODS

Merchandise MAY NOT be returned for credit or replacement without prior inspection and written authorization from Delta Faucet Company (DFC). Any unauthorized return of products is expressly prohibited. A handling charge of 50% will be assessed against anyone attempting to return merchandise without prior authorization. Only product purchased directly from Delta Faucet Company by a wholesaler will be authorized for return. NO EXCEPTIONS.

WARRANTY RETURNS

A full wholesale price credit will be issued to authorized Delta Faucet wholesaler customers for returned merchandise that is defective as described in the warranty. The defective merchandise must be shipped freight prepaid by the least costly method of shipment and the freight cost of such shipment will be added to the price credit. If a replacement is made rather than a credit issued, Delta Faucet Company will ship the replacement freight prepaid. Product returned as defective that is found to be misused, abused, modified or otherwise NOT DEFECTIVE will receive credit at scrap value only.

OTHER RETURNS

All other returns will be handled in accordance with the then-current DFC Return Policy for Non-Defective Faucets, copies of which are available upon request.

PRICES

All prices and specifications of models are subject to change without notice. Orders will be invoiced at the prices prevailing at time of shipment.

NOTE

All orders are subject to all applicable DFC policies in effect at the time of order.

These Terms of Sale are subject to change without notice.

RETURN ADDRESS

All returns are to be sent to the following address:

Delta Faucet Company 3445 Ridgecrest Road Extended Jackson, Tennessee 38305

Attn: Returned Goods Department

ActivTouch, Allora, Ara, Arctic, Arzo, Ashlyn, Brilliance, CER-TECK, Compel, Delta, DURAMOUNT, Esque, Essa, EZ Anchor, Foundations, HDF, H₂Okinetic, H₂Optics, HydraChoice, HydroRain, InnoFlex, In2ition, Jetted Shower XO, Lahara, Leland, MagnaTite, Mateo, Monitor, MultiChoice, Palm, Palo, Pilar, Pivotal, PowerDrench, Proximity, SheildSpray, SpecSelect, SpotShield, Teck, TempAssure, TempSense, Temp₂O, Tesla, Touch₂O, Touch₂O_{.xt}, Touch-Clean, Trinsic, Tuf-Teck, Venetian Bronze, Vero, Victorian, Windemere, Woodhurst and Zura are registered trademarks of Delta Faucet Company.

Addison, Botanical, Broderick, Cassidy, Champagne Bronze, Collins, Décor Assist, DIAMOND, Dorval, Dryden, eFlow, Emerge, Fundamentals, Fuse, Grail, Innovations, Linden, Multi-Flow, Orleans, Quick-Snap, Scald-Guard, Signature, Stryke, Talbott, Tract-Pack, Waterfall and XO Jet Module are trademarks of Delta Faucet Company.

Celcon° is a registered trademark of CNA Holdings, LLC.

EXPLORE EVEN MORE INNOVATION.



Learn more about Electronic Lavatory Faucets with Proximity® Sensing Technology on page 5.

THERE'S MORE TO SEE ON OUR WEBSITES: DELTACOMMERCIALFAUCETS.COM AND SPECSELECT.COM

www.deltacommercialfaucets.com

 Featuring a detailed look at our core commercial products

www.specselect.com

- Featuring a detailed look at our complete commercial product offering
- Includes our unique, dynamically created model-specific spec sheets for all models
- Includes our unique, dynamic product selection guidance system, that ensures only valid product models can be selected

Everything you need to make your selection easier is right online at deltacommercial faucets.com and specselect.com. If you have any additional questions, contact us at 800.345.DELTA.

Delta Commercial Technical Service 877.509.2680





A MASCO COMPANY

Delta Faucet Company 55 E. 111th St., P.O. Box 40980 Indianapolis, IN 46280

Masco Canada Limited 350 S. Edgeware Rd. St. Thomas, Ontario N5P 4L1

deltafaucet.com 800.345.DELTA (3358)

Delta Commercial Technical Service 877.509.2680

©2020 Delta Faucet Company DL-2062 08/20